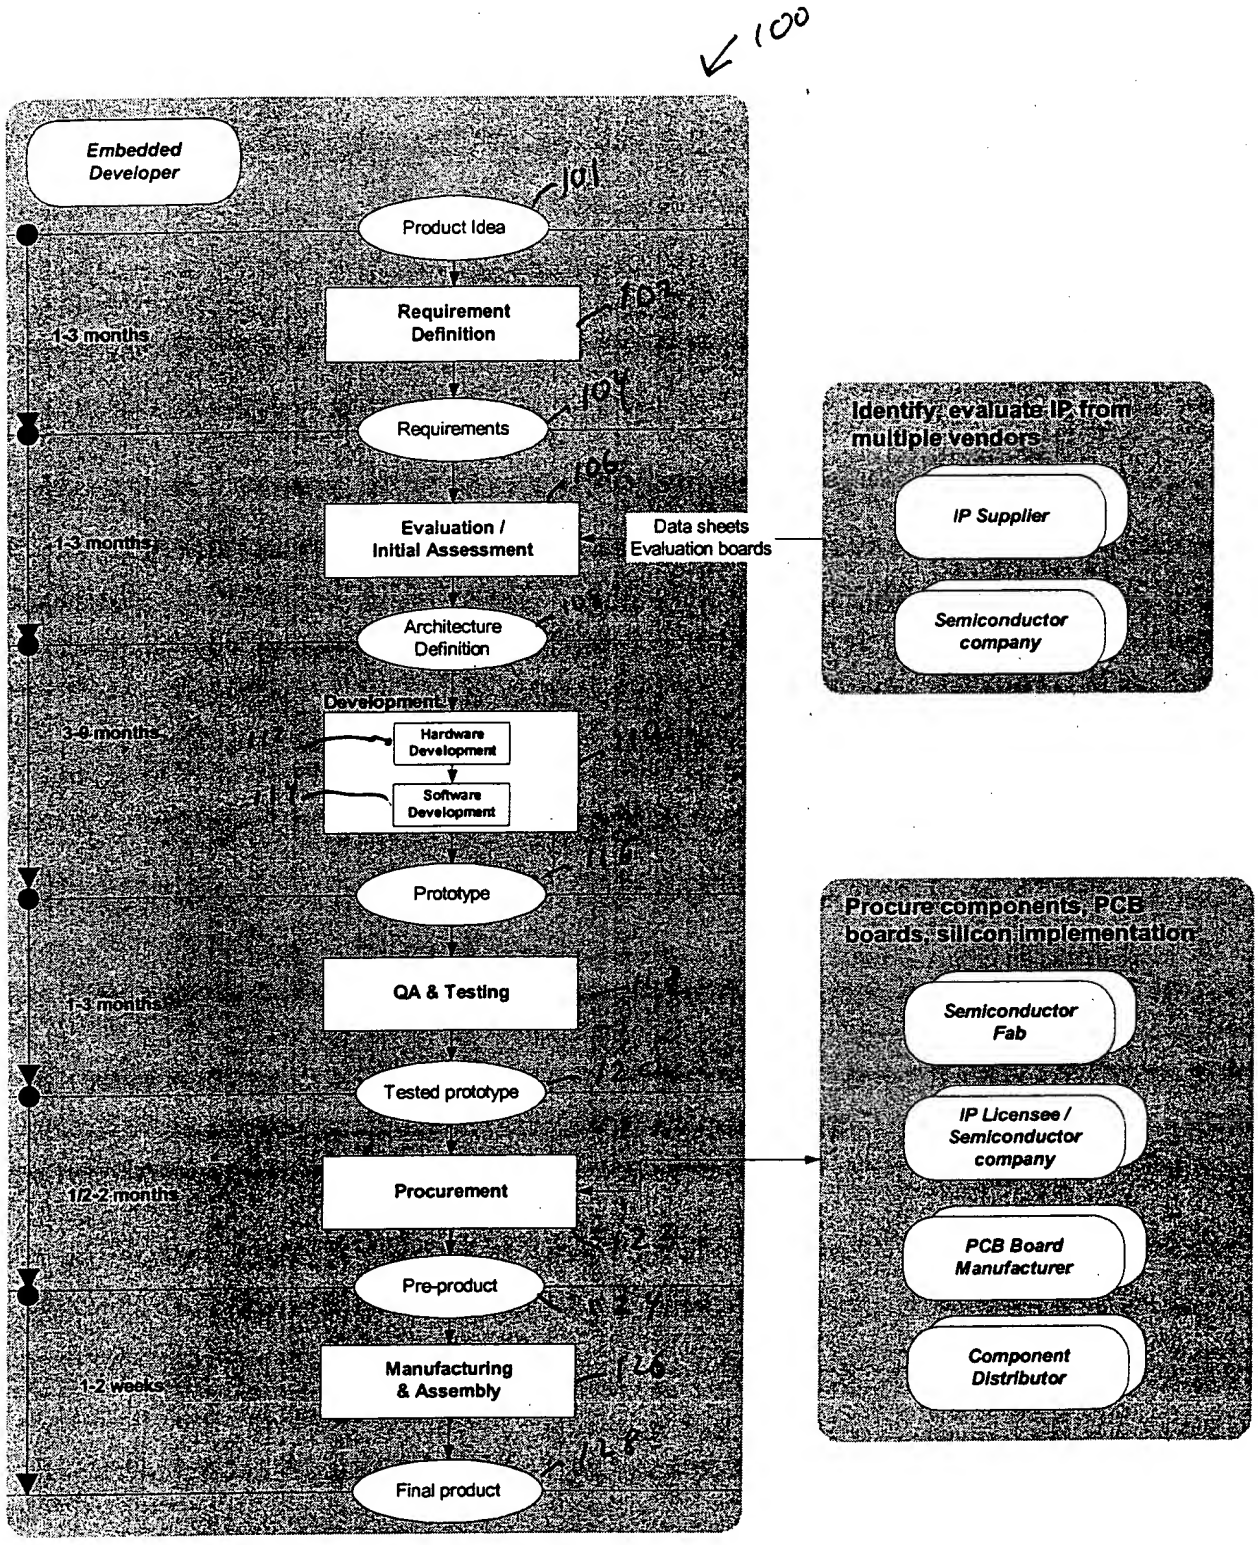

FIG. 1. (Prior art)

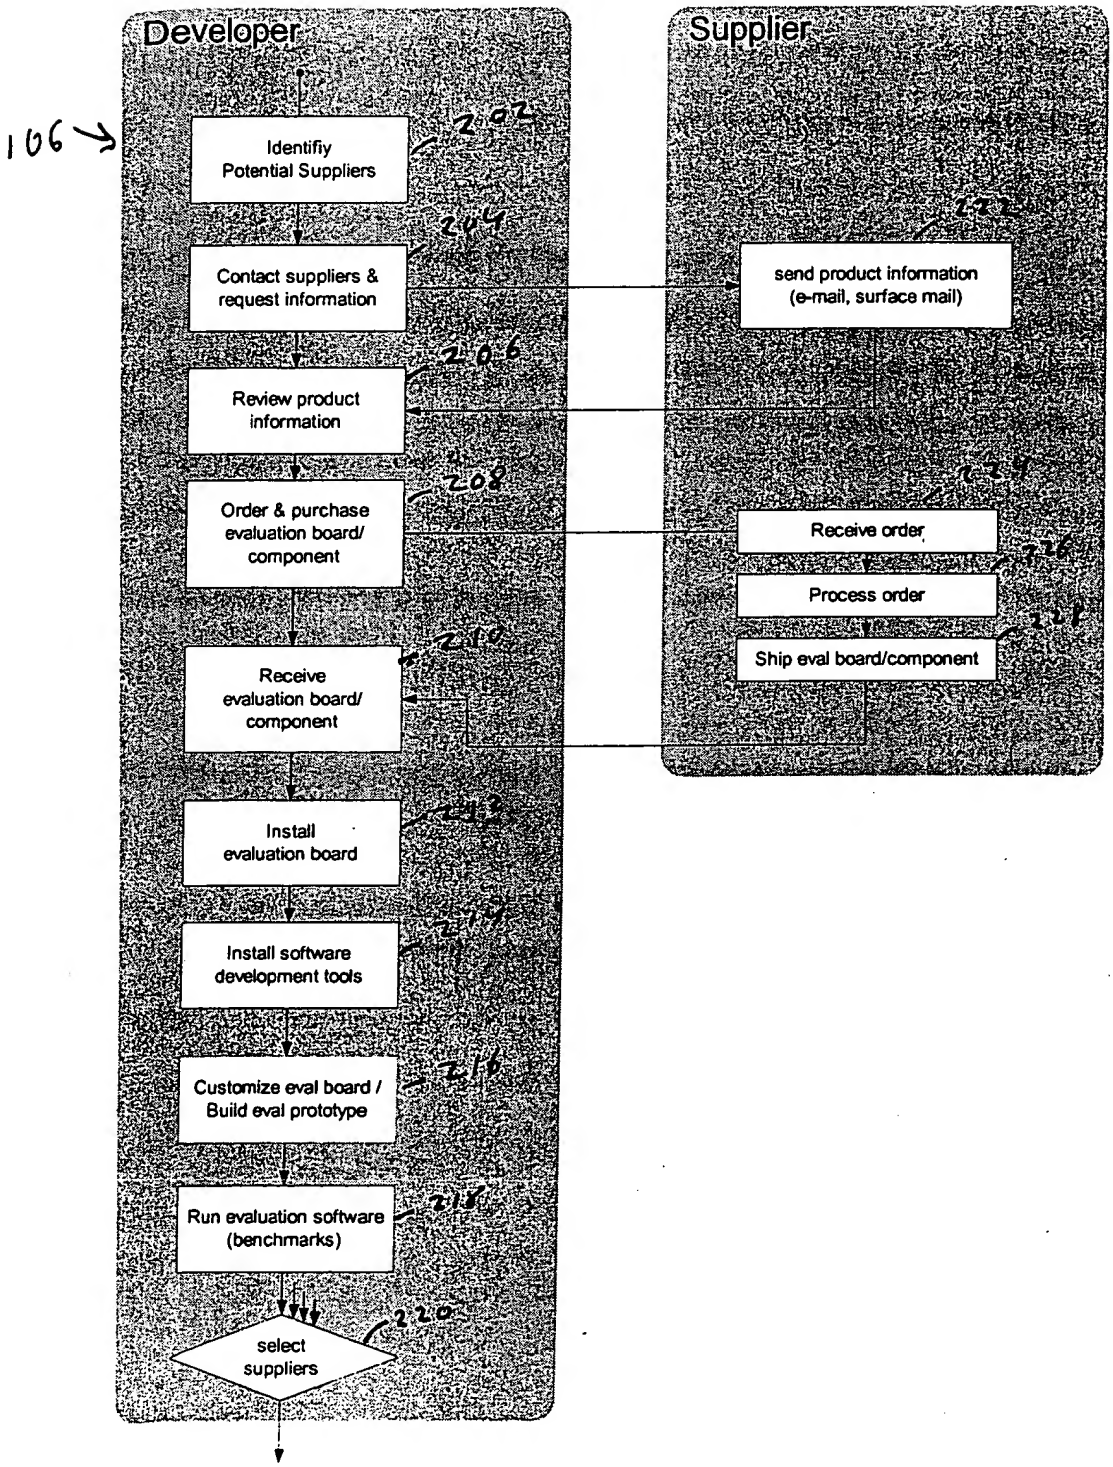

FIG. 2 (prior art)

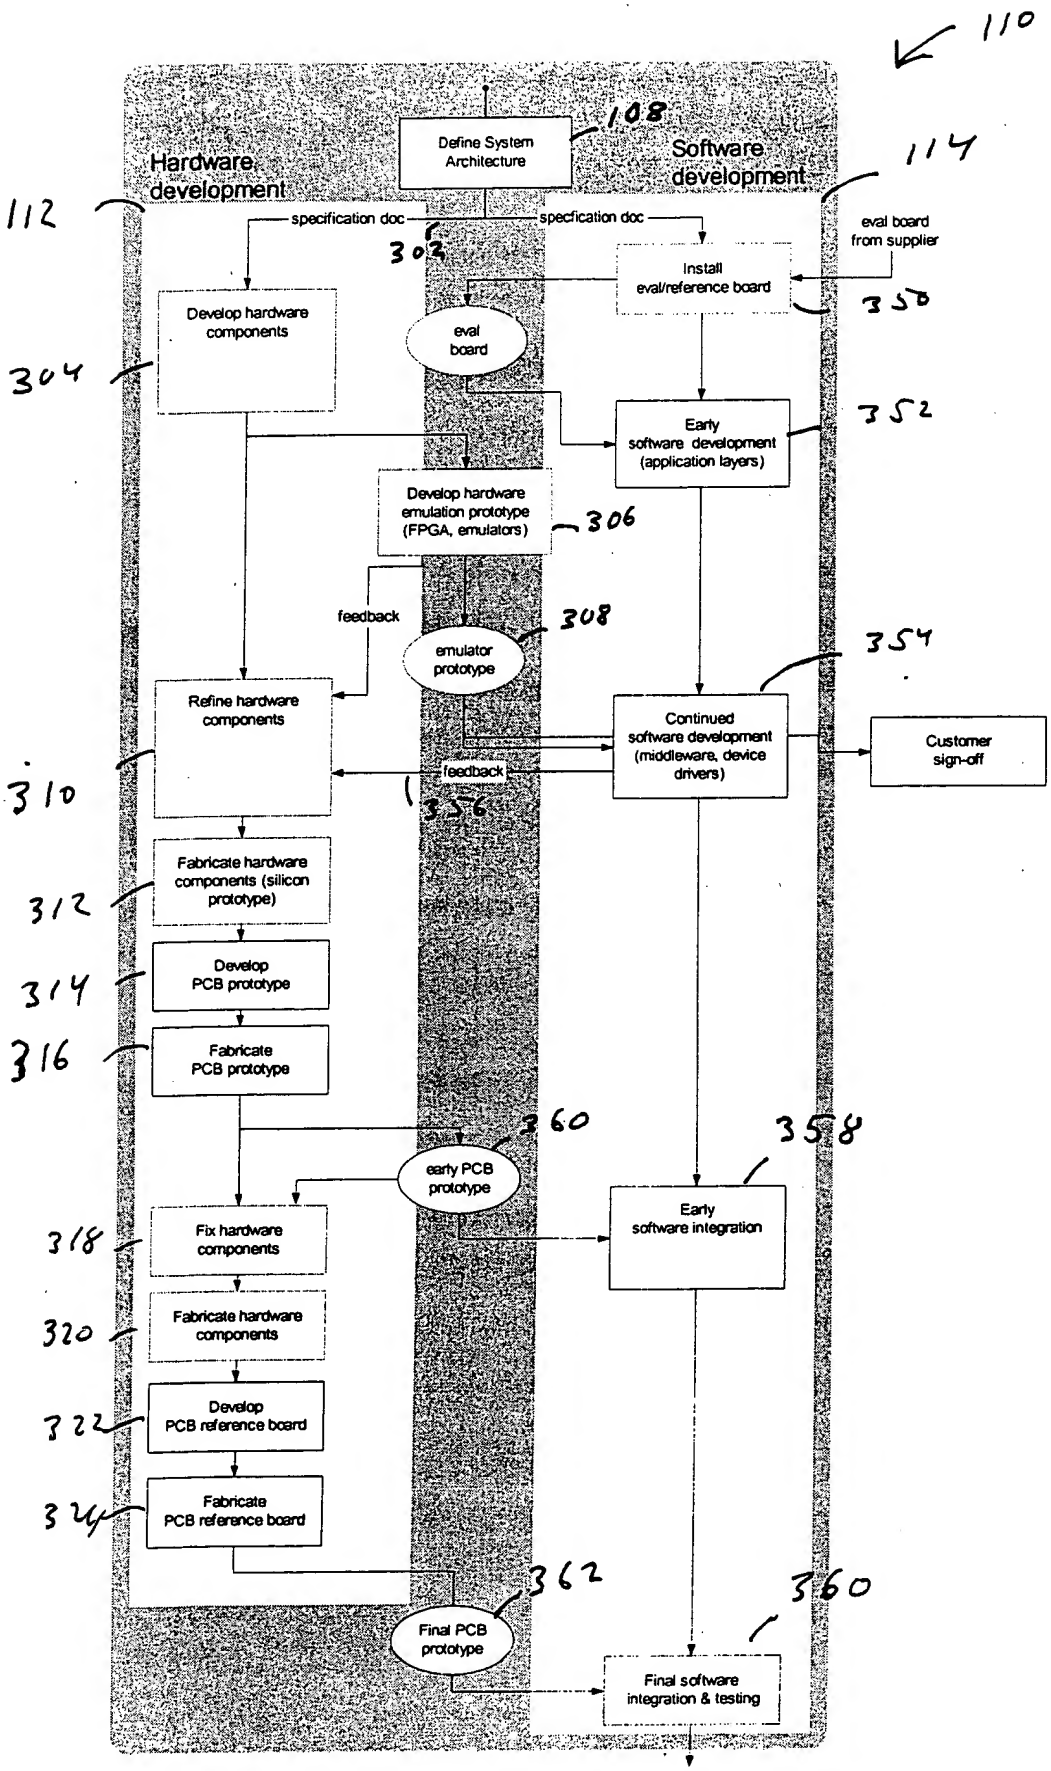

FIG. 3 (prior art)

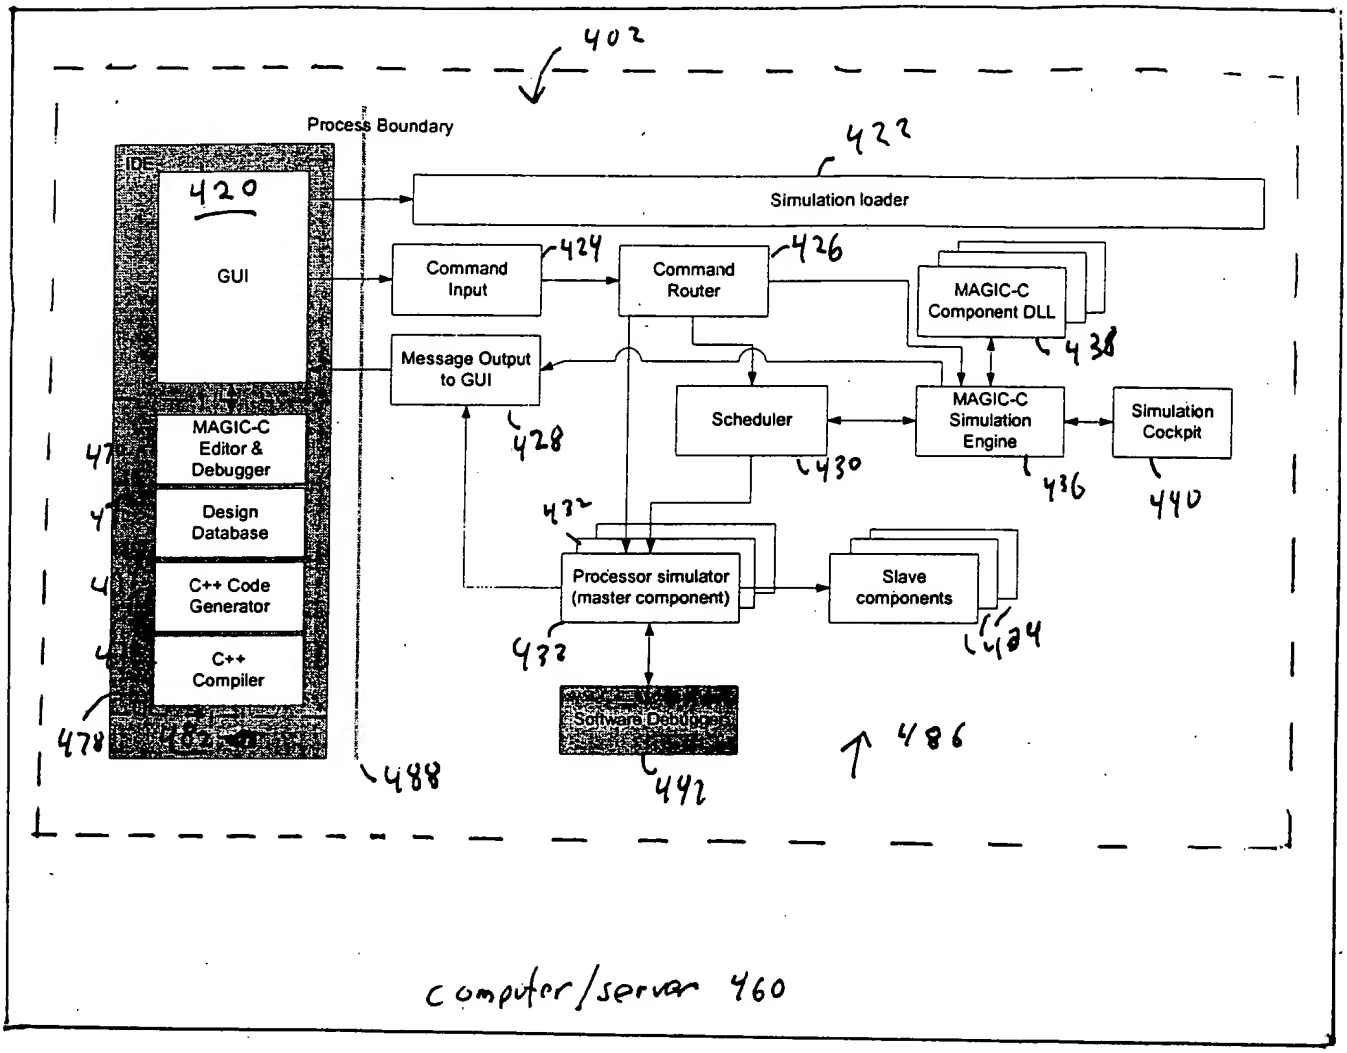
402
Process Boundary
IDE
420
GUI
MAGIC-C Editor & Debugger
Design Database
C++ Code Generator
C++ Compiler
478
482
488
422
Simulation loader
Command Input
424
Command Router
426
MAGIC-C Component DLL
438
Message Output to GUI
428
Scheduler
430
MAGIC-C Simulation Engine
436
Simulation Cockpit
440
432
Processor simulator (master component)
Slave components
434
433
Software Debugger
442
486
computer/server 460

FIG. 4A

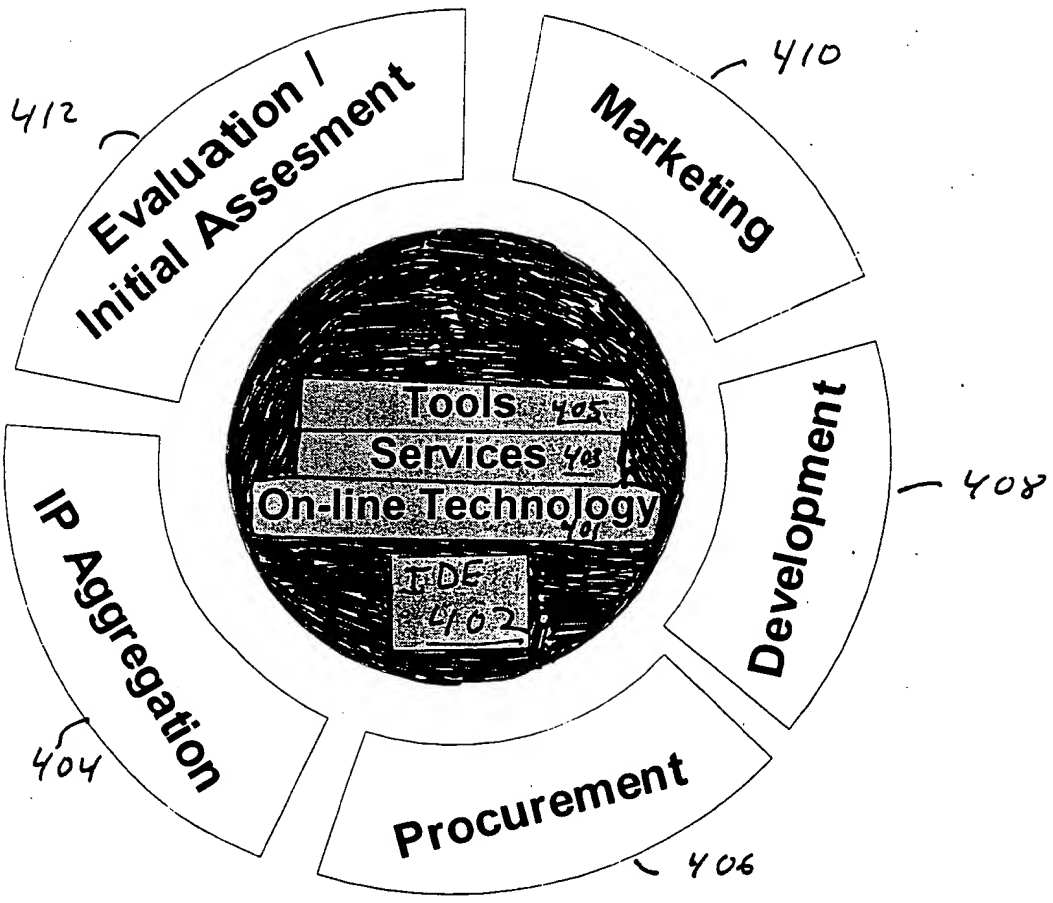
Evaluation / Initial Assesment
412
Marketing
410
Development
408
Procurement
406
IP Aggregation
404
Tools 405
Services 403
On-line Technology
IDE 401
402

FIG. 4B

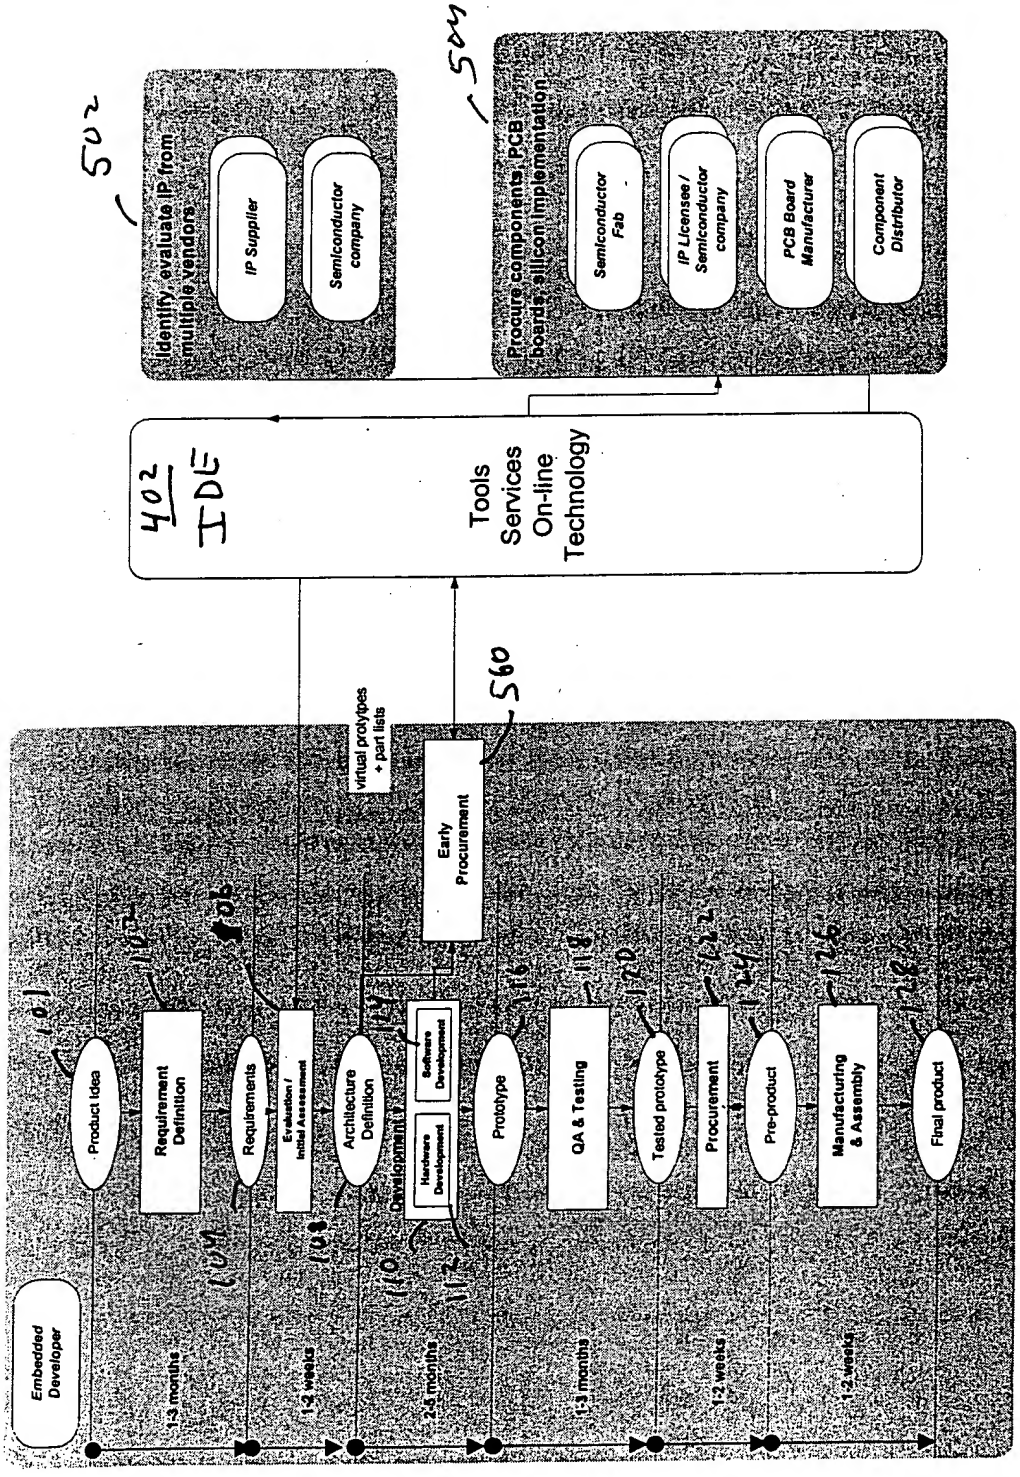
502
504
Identify, evaluate IP from multiple vendors
IP Supplier
Semiconductor company
Procure components, PCB boards, silicon implementation
Semiconductor Fab
IP Licensee / Semiconductor company
PCB Board Manufacturer
Component Distributor
402
IDE
Tools
Services
On-line
Technology
560
virtual prototypes + part lists
Early Procurement
Embedded Developer
Product Idea
Requirement Definition
Requirements
Evaluation / Initial Assessment
Architecture Definition
Hardware Development
Software Development
Prototype
QA & Testing
Tested prototype
Procurement
Pre-product
Manufacturing & Assembly
Final product
1-3 months
1-2 weeks
2-5 months
1-3 months
1-2 weeks
1-2 weeks

FIG. 5

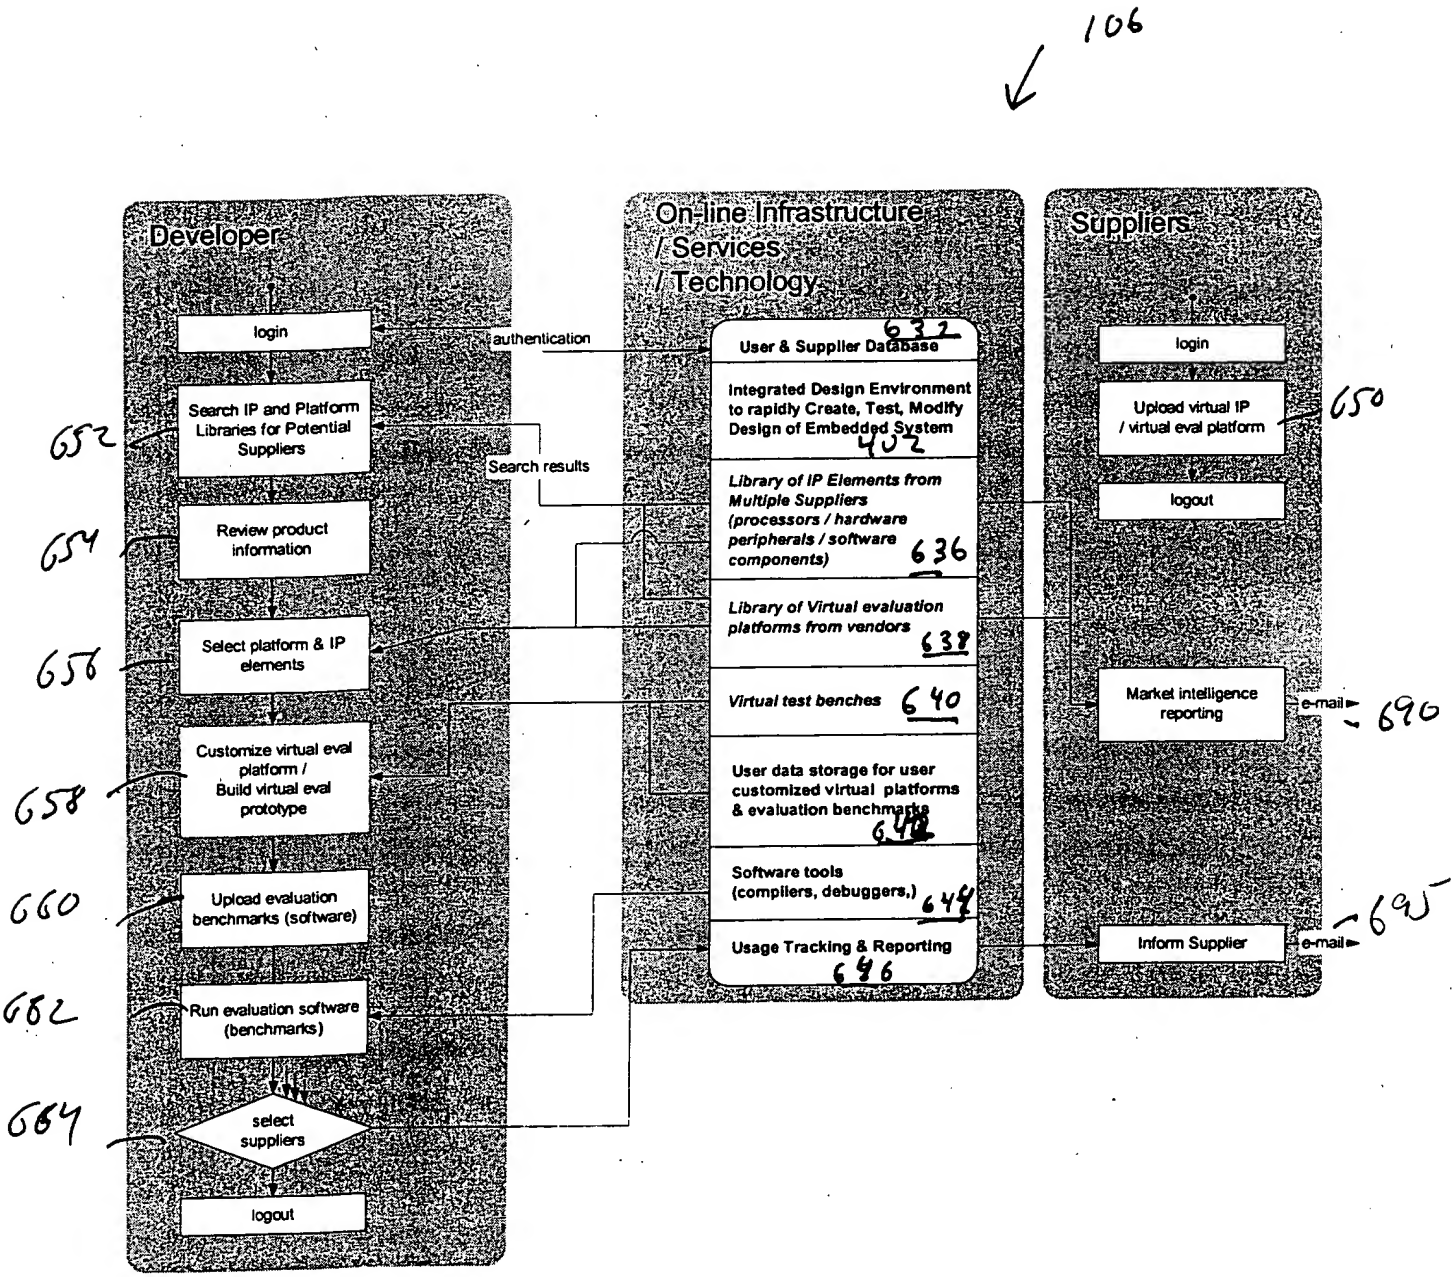
106
Developer
login
Search IP and Platform Libraries for Potential Suppliers
Review product information
Select platform & IP elements
Customize virtual eval platform / Build virtual eval prototype
Upload evaluation benchmarks (software)
Run evaluation software (benchmarks)
select suppliers
logout
652
654
656
658
660
662
664
authentication
Search results
On-line Infrastructure / Services / Technology
User & Supplier Database 632
Integrated Design Environment to rapidly Create, Test, Modify Design of Embedded System 402
Library of IP Elements from Multiple Suppliers (processors / hardware peripherals / software components) 636
Library of Virtual evaluation platforms from vendors 638
Virtual test benches 640
User data storage for user customized virtual platforms & evaluation benchmarks 642
Software tools (compilers, debuggers,) 644
Usage Tracking & Reporting 646
Suppliers
login
Upload virtual IP / virtual eval platform
logout
Market intelligence reporting
Inform Supplier
650
e-mail
690
695
e-mail

FIG. 6

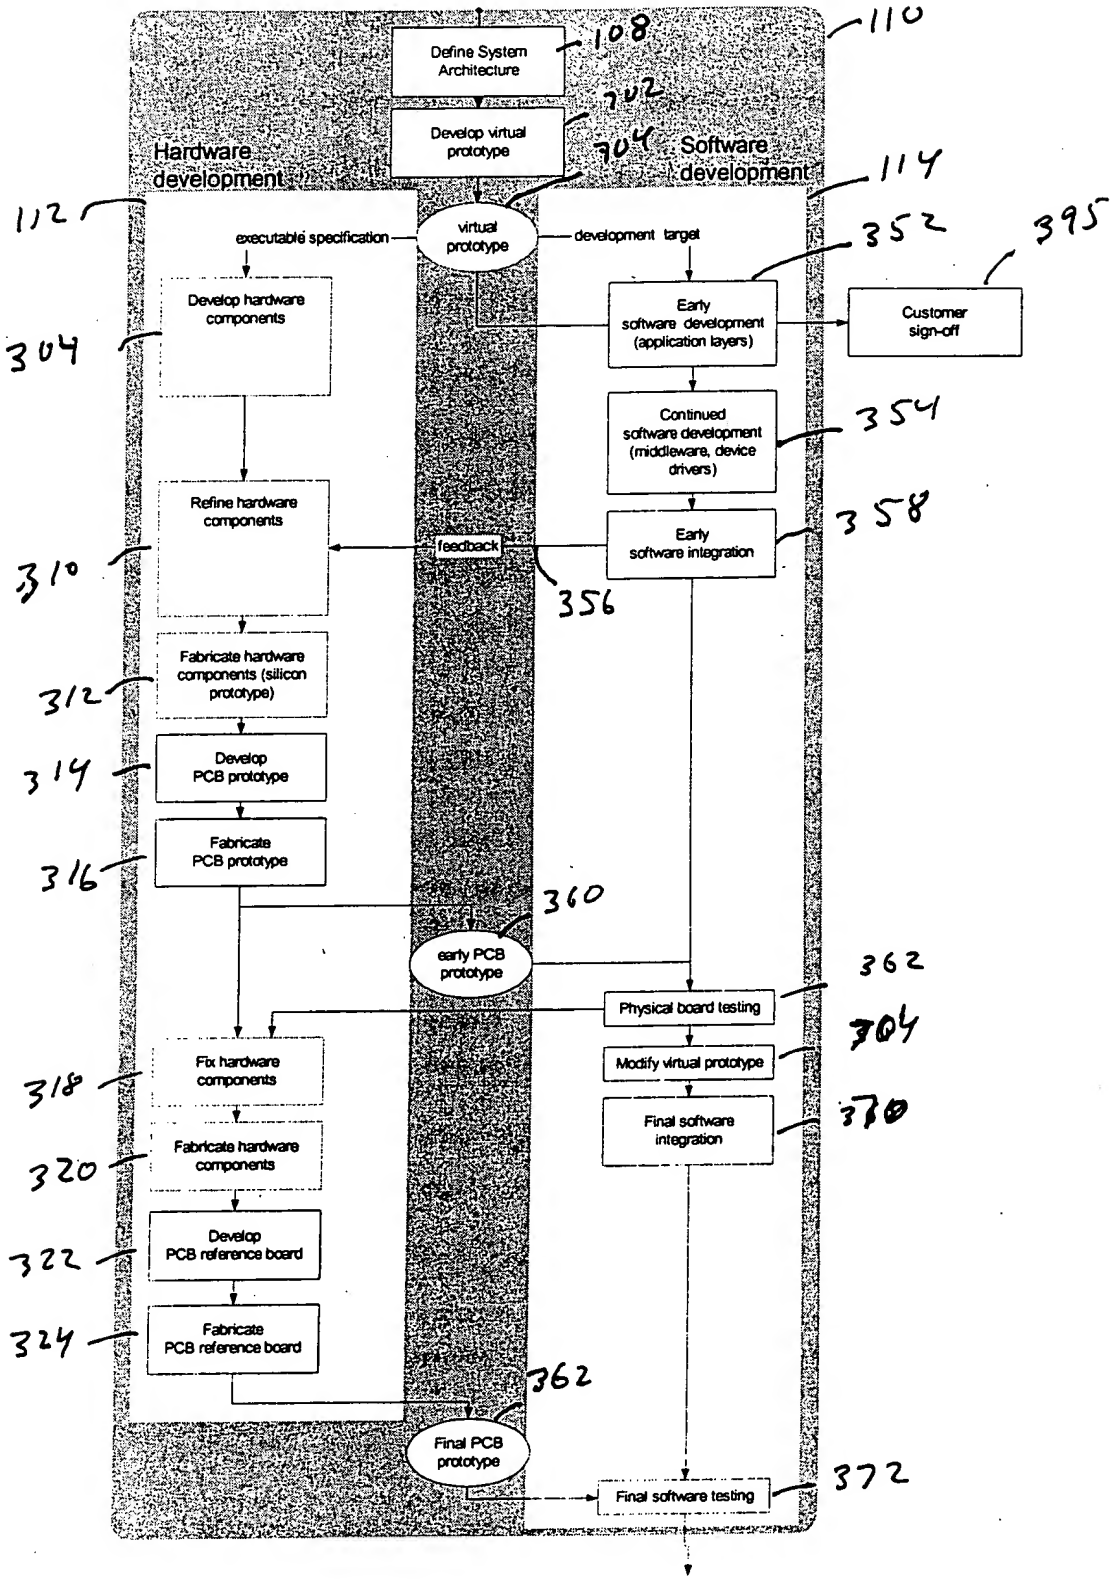
Define System Architecture
108
110
Develop virtual prototype
702
704
Hardware development
Software development
114
112
executable specification
virtual prototype
development target
352
395
Develop hardware components
304
Early software development (application layers)
Customer sign-off
Continued software development (middleware, device drivers)
354
Refine hardware components
310
feedback
Early software integration
358
356
Fabricate hardware components (silicon prototype)
312
Develop PCB prototype
314
Fabricate PCB prototype
316
360
early PCB prototype
362
Physical board testing
704
Fix hardware components
318
Modify virtual prototype
Final software integration
370
Fabricate hardware components
320
Develop PCB reference board
322
Fabricate PCB reference board
324
362
Final PCB prototype
Final software testing
372

FIG. 7

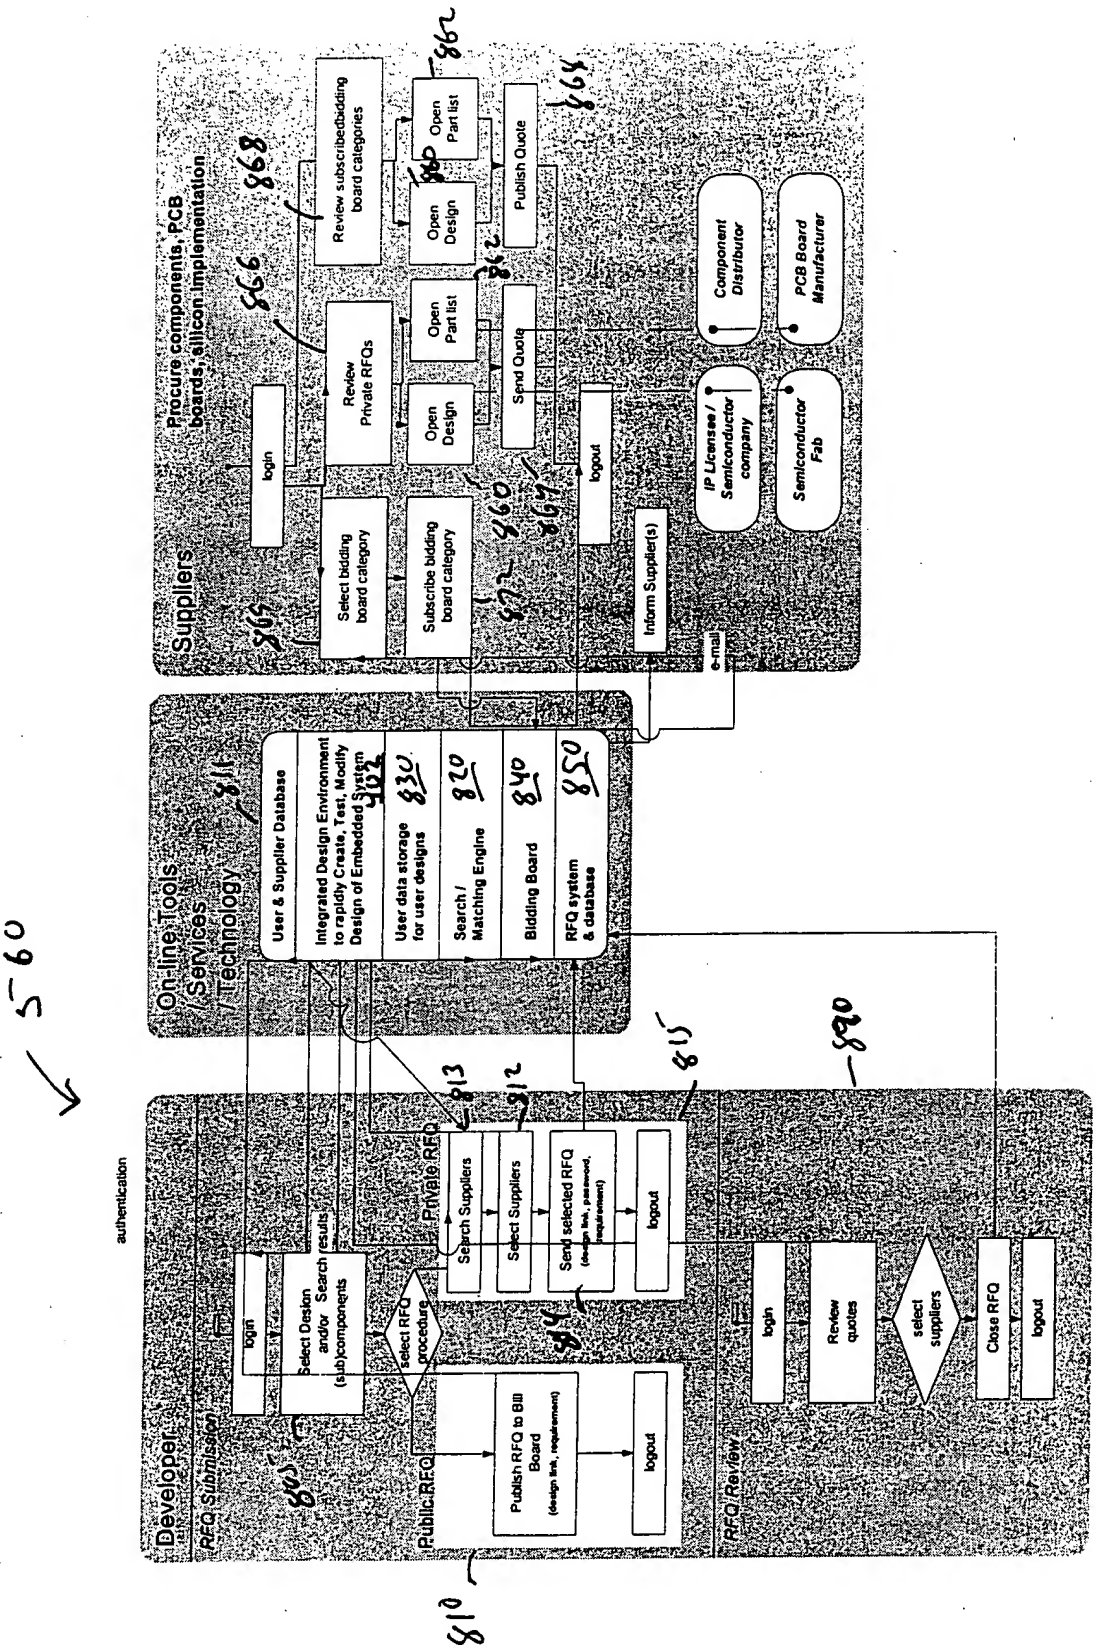
860
868
866
864
862
Suppliers
Procure components, PCB boards, silicon implementation
login
Review Private RFQs
Review subscribedbidding board categories
Open Design
Open Part list
Send Quote
Publish Quote
logout
Select bidding board category
Subscribe bidding board category
Inform Supplier(s)
e-mail
IP Licensee / Semiconductor company
Semiconductor Fab
Component Distributor
PCB Board Manufacturer
On-line Tools / Services / Technology
User & Supplier Database
Integrated Design Environment to rapidly Create, Test, Modify Design of Embedded System
User data storage for user designs
Search / Matching Engine
Bidding Board
RFQ system & database
authentication
Developer
RFQ Submission
Select Design and/or (sub)components
Search results
Select RFQ procedure
Public RFQ
Private RFQ
Search Suppliers
Select Suppliers
Send selected RFQ
Publish RFQ to BB Board
RFQ Review
Review quotes
select suppliers
Close RFQ
810
812
813
815
820
830
840
850
860
862
864
866
868
870
872
874
876
878
880
882

FIG. 8

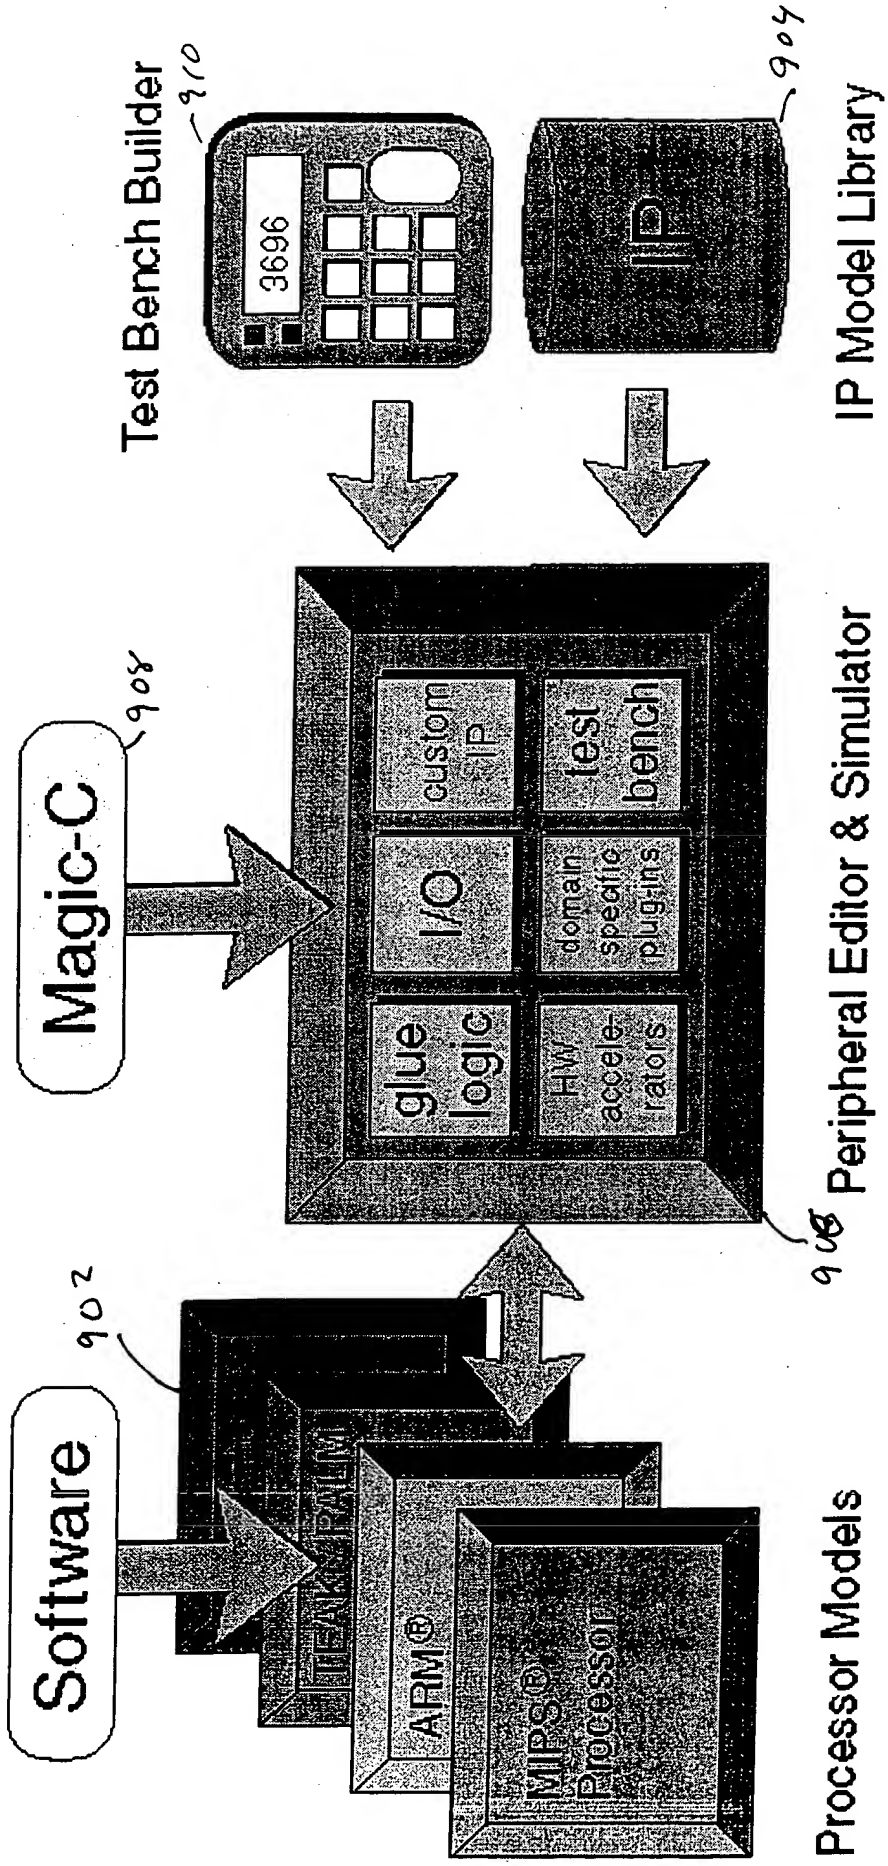
Test Bench Builder
910
3696
IP
904
IP Model Library
Magic-C
908
custom IP
test bench
I/O
domain specific plug-ins
glue logic
HW accele-rators
906
Peripheral Editor & Simulator
Software
902
ARM®
MIPS®
Processor
Processor Models

FIG. 9

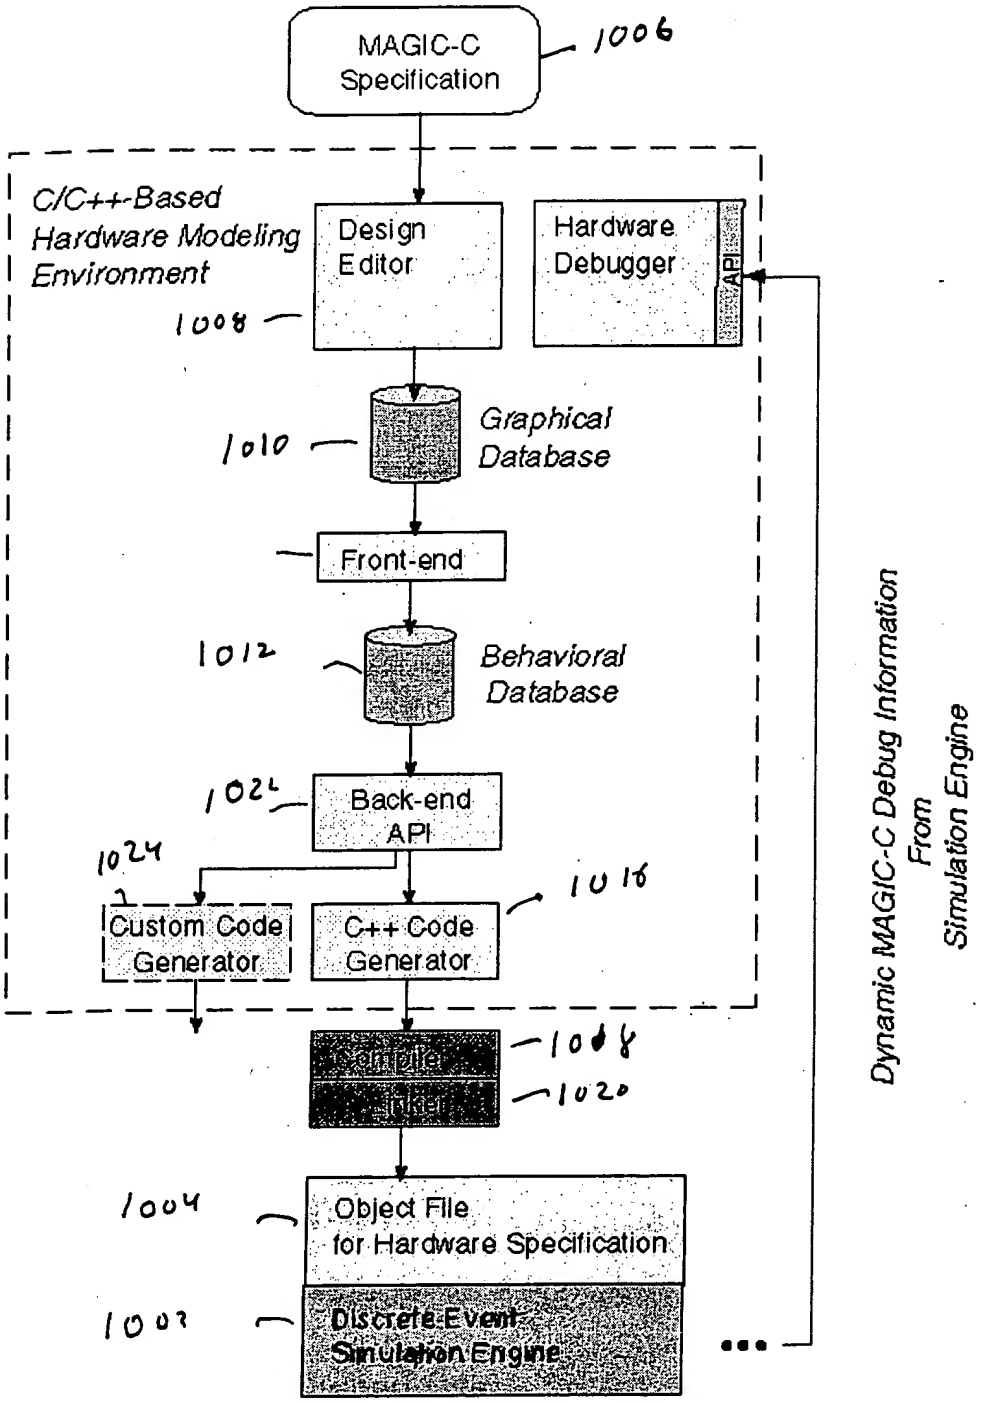
MAGIC-C Specification
1006
C/C++-Based Hardware Modeling Environment
Design Editor
1008
Hardware Debugger
API
1010
Graphical Database
Front-end
1012
Behavioral Database
1022
Back-end API
1024
1016
Custom Code Generator
C++ Code Generator
Compiler
1018
Linker
1020
1004
Object File for Hardware Specification
1002
Discrete Event Simulation Engine
Dynamic MAGIC-C Debug Information From Simulation Engine

FIG. 10

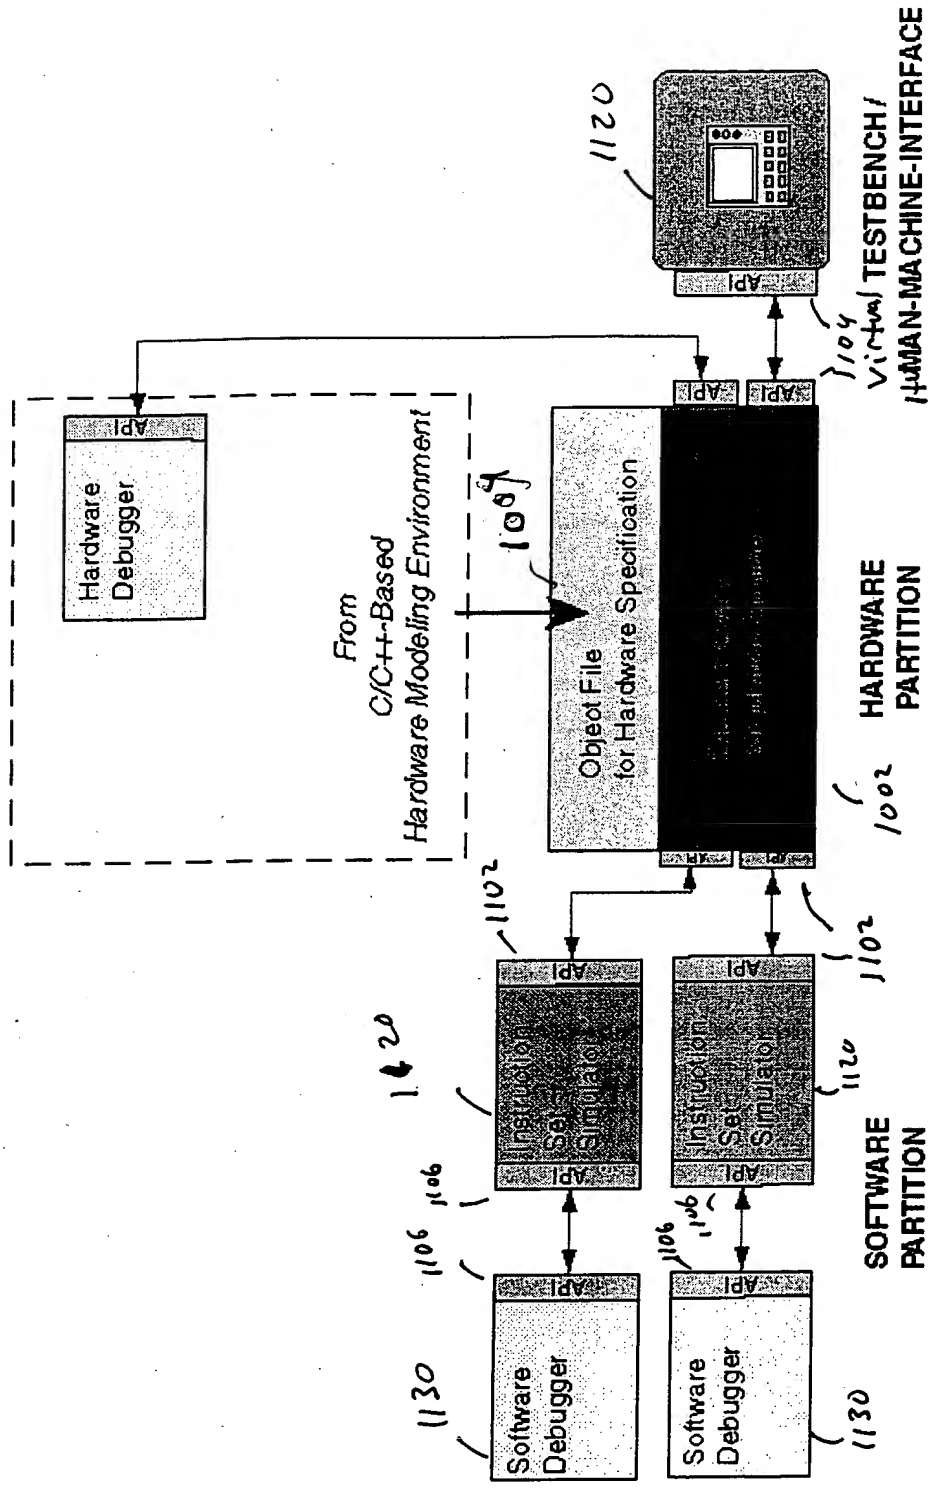
1120
API
1104
Virtual TESTBENCH/
HUMAN-MACHINE-INTERFACE
Hardware Debugger
From C/C++-Based Hardware Modeling Environment
1109
Object File for Hardware Specification
HARDWARE PARTITION
1002
1102
1102
1120
Instruction Set Simulator
Instruction Set Simulator
SOFTWARE PARTITION
1106
1106
1106
1130
Software Debugger
Software Debugger
1130

FIG. 11

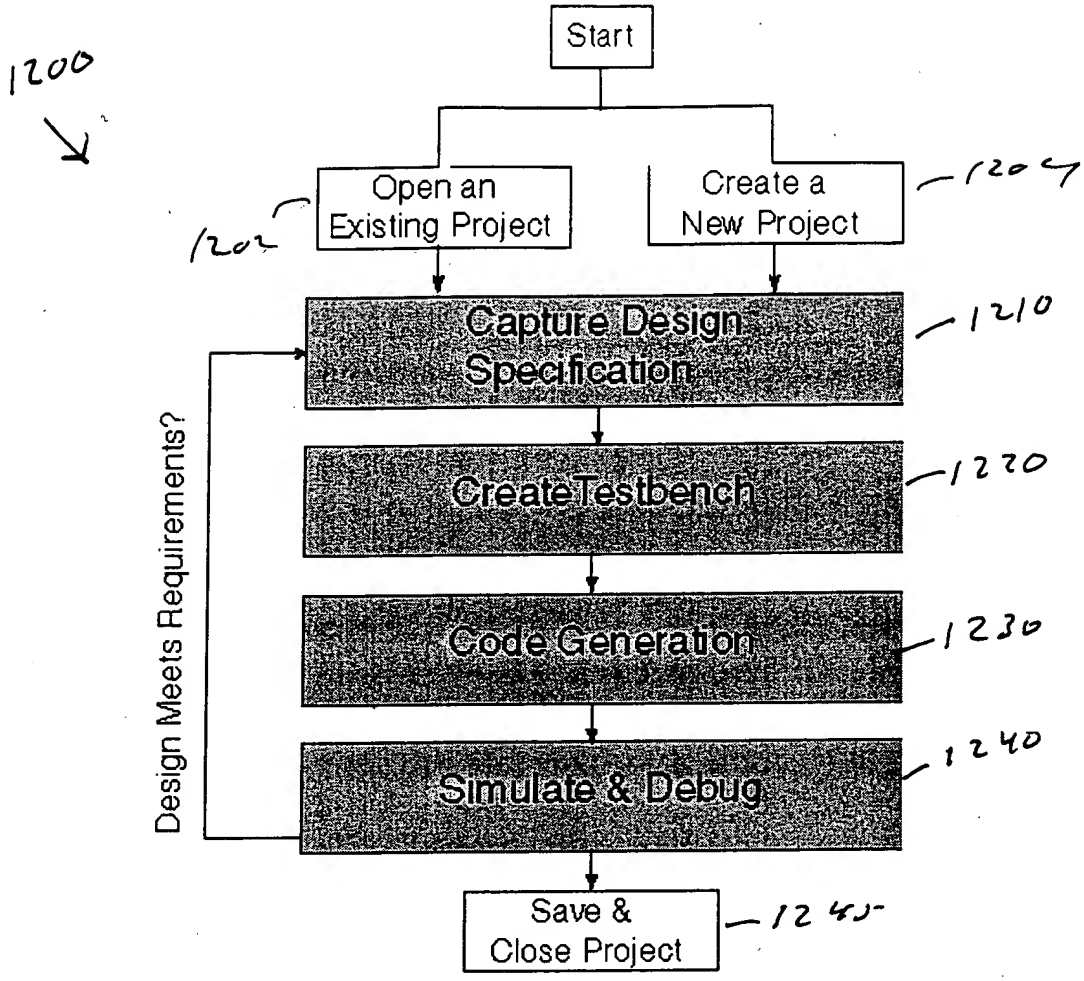
1200
Start
Open an Existing Project
1202
Create a New Project
1204
Capture Design Specification
1210
Create Testbench
1220
Code Generation
1230
Simulate & Debug
1240
Design Meets Requirements?
Save & Close Project
1250

FIG. 12

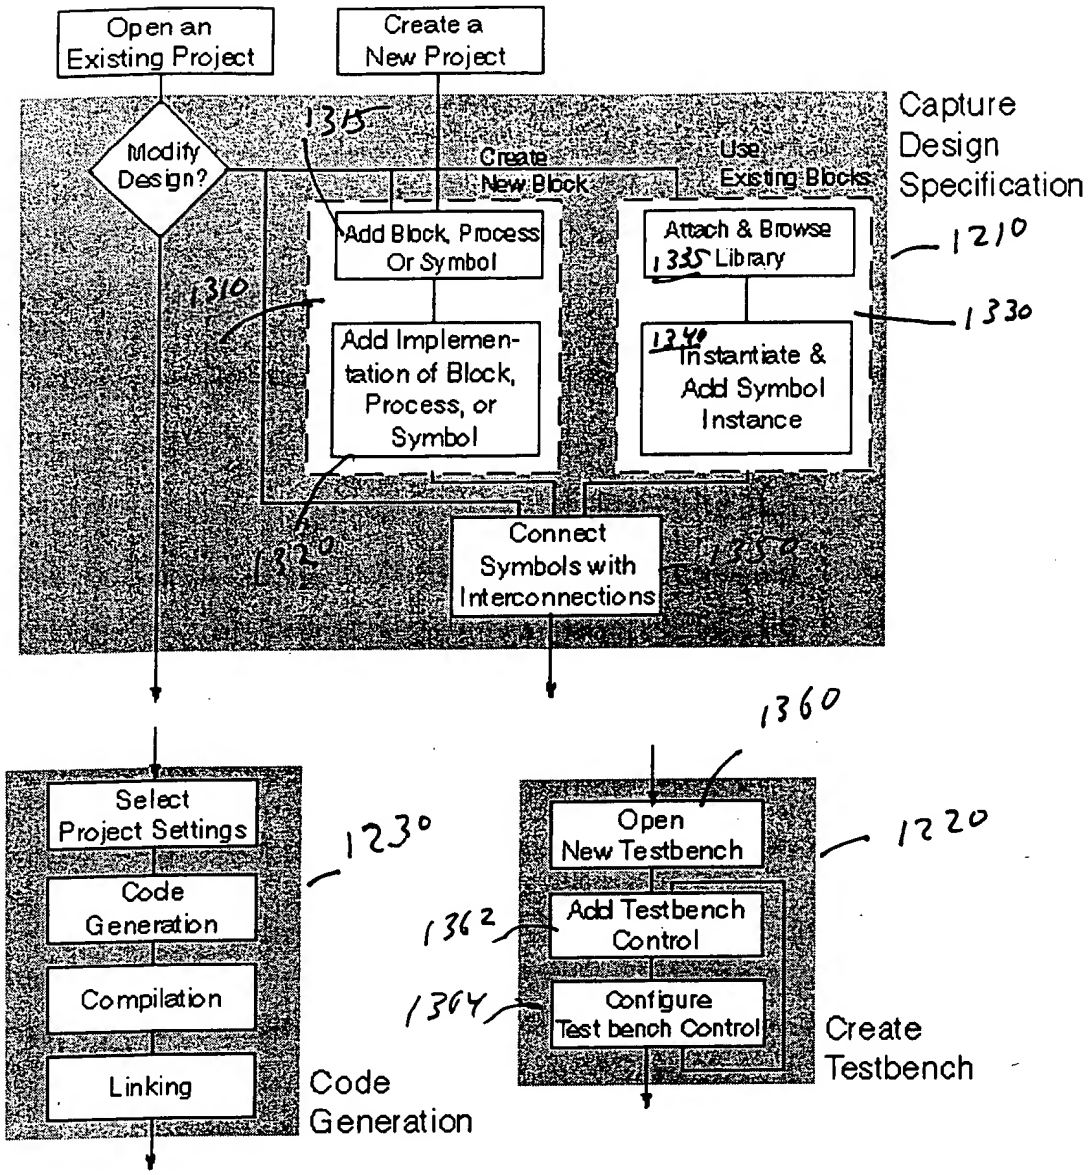
Open an Existing Project
Create a New Project
Modify Design?
1315
Create New Block
Use Existing Blocks
Add Block, Process Or Symbol
Attach & Browse 1335 Library
Capture Design Specification
1210
1310
1330
Add Implementation of Block, Process, or Symbol
1340 Instantiate & Add Symbol Instance
1320
Connect Symbols with Interconnections
1350
1360
Select Project Settings
1230
Code Generation
Compilation
Linking
Code Generation
Open New Testbench
1220
1362
Add Testbench Control
1364
Configure Test bench Control
Create Testbench

FIG. 13

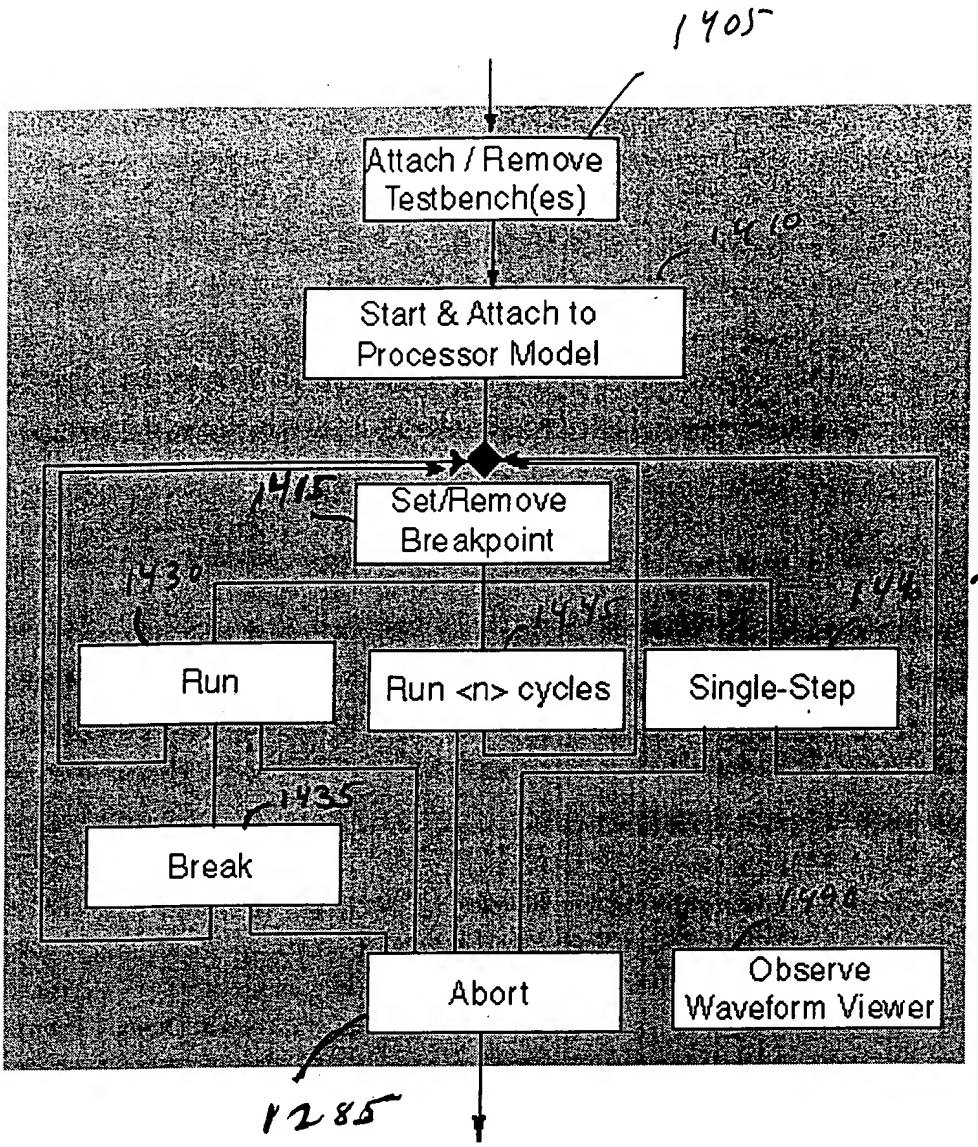
1405
Attach / Remove Testbench(es)
1410
Start & Attach to Processor Model
1415
Set/Remove Breakpoint
1240
1430
1445
1420
Run
Run <n> cycles
Single-Step
1435
Break
Simulate & Debug
1408
Observe Waveform Viewer
Abort
1285

FIG. 14

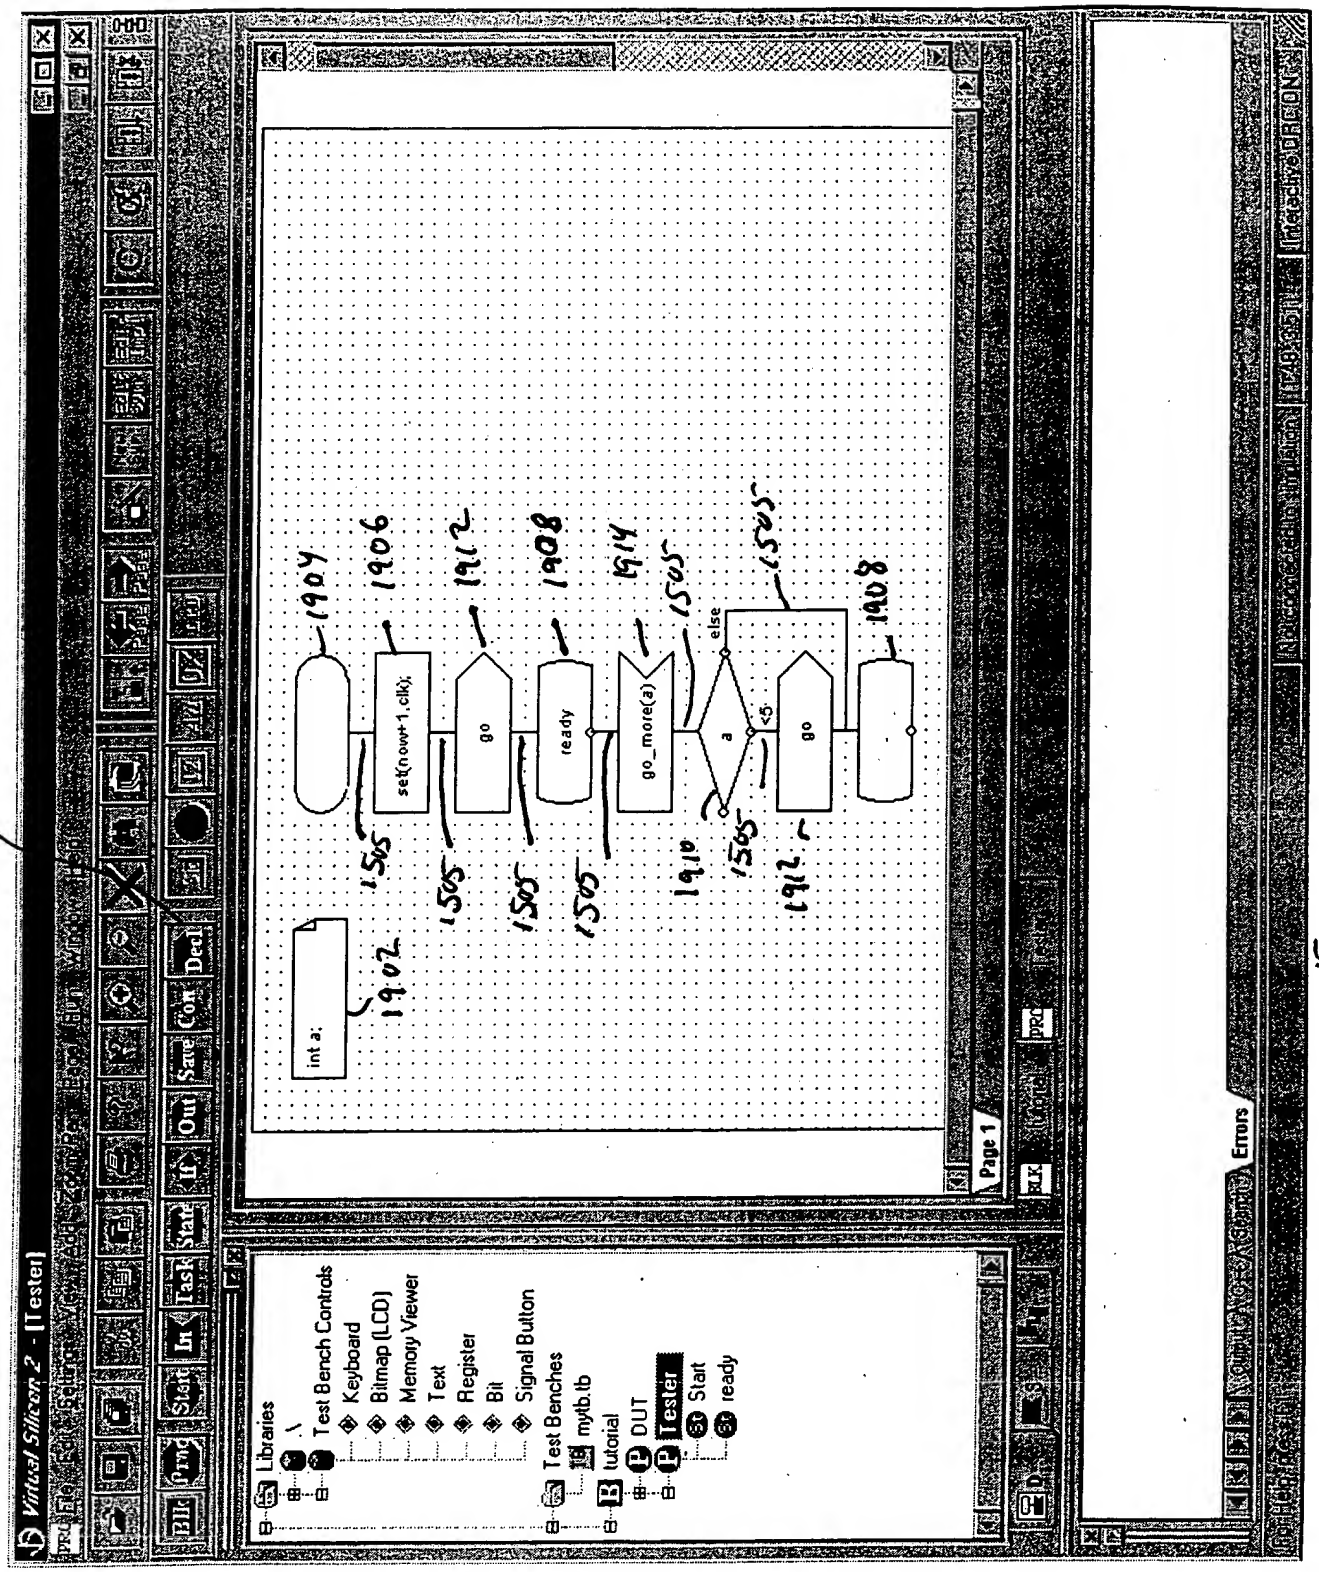
1520
Virtual Silicon 2 - [Tester]
Libraries
Test Bench Controls
Keyboard
Bitmap (LCD)
Memory Viewer
Text
Register
Bit
Signal Button
Test Benches
mytb.tb
tutorial
DUT
Tester
Start
ready
int a;
set(now+1,clk);
go
ready
go_more(a)
a
else
<5
go
1902
1904
1906
1912
1908
1914
1910
1505
Page 1
Errors

FIG. 15

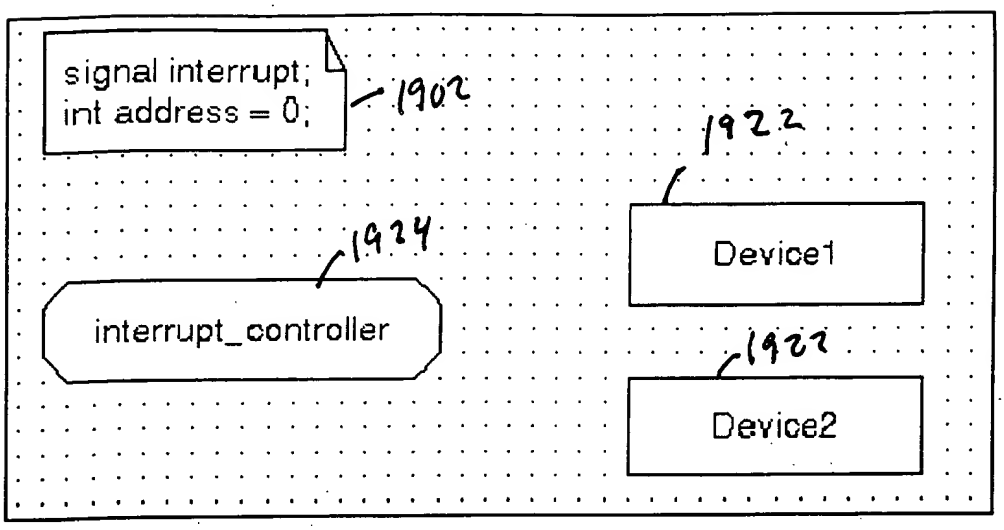

FIG. 16

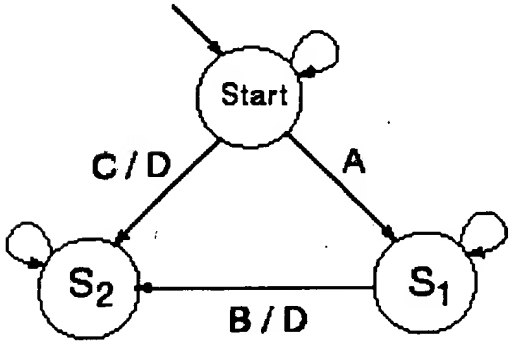

FIG. 17(a)

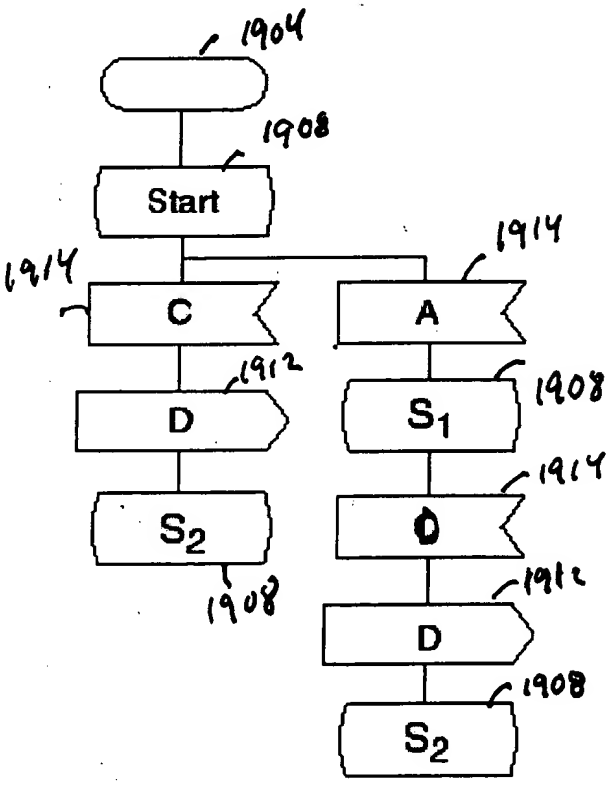

FIG. 17 (b)

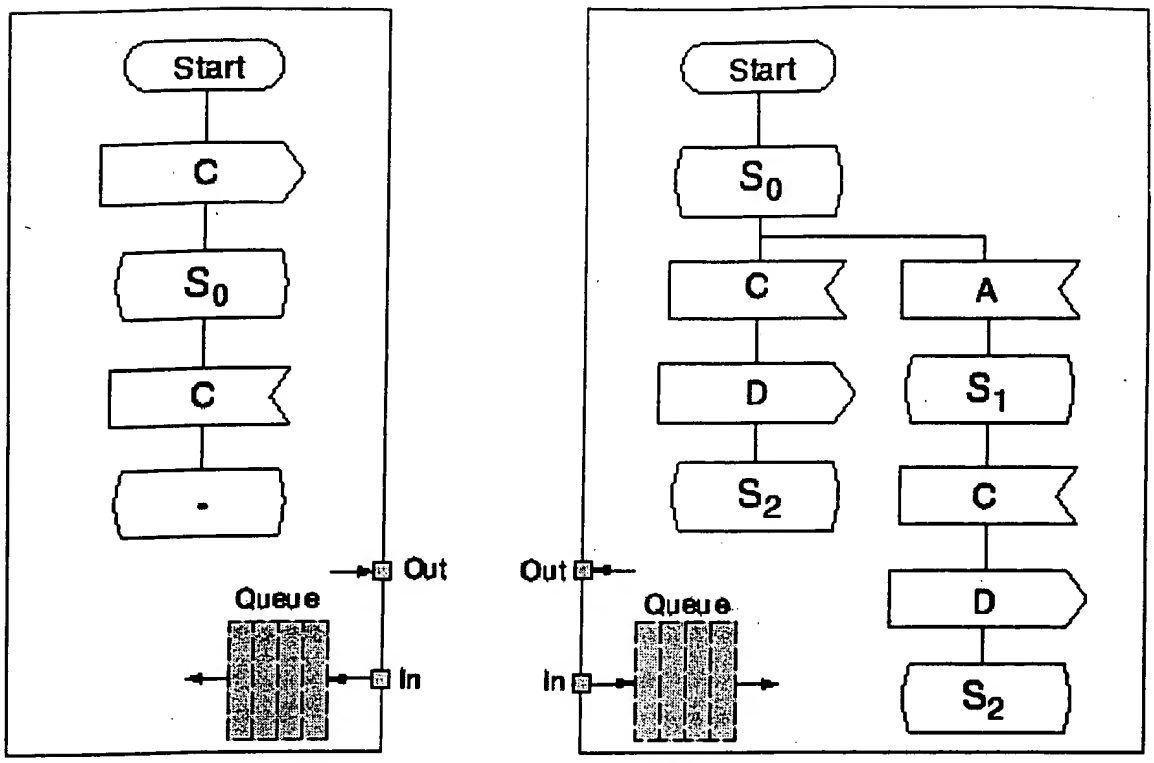

FIG. 18

Name	Graphical symbol	Description
Declaration		defines local variables and signals.
Start		Starting point of the Finite State Machine execution at initialization time.
Task	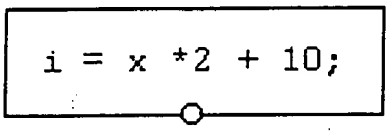	Execution block, containing ANSI-C statements to be executed.
State		Location where FSM waits in until a triggering Signal is received.
Decision		Directs execution flow based on the result of expression evaluation inside the decision construct.
Signal-Out		Sending of a communication signal (with an optional payload).
Signal-In		Receiving of a communication signal (with an optional payload)
Connector		Allows to split designs over multiple pages, and connects the control flow between these different pages.

FIG 19A

Symbol		Captures design hierarchy and structure. Communication is done through pins on the outline of the symbol. Allows to re-use functional behavior by supporting multiple instances.
Blocks	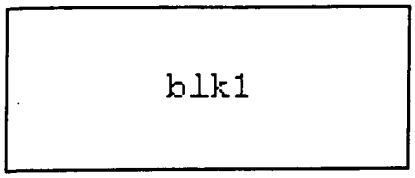	Captures design hierarchy and structure. Communication is done through signals declared at higher scopes. Communication is done by signal name matching (rather than by pin connection). A block can contain multiple processes.
Process		Acts as leaf node in the design hierarchy, and captures a single FSM. By definition, all processes are concurrent at all times.

1920
1922
1924

FIG. 19B

```
// External interface
extern_signal WR(unsigned int,unsigned int, unsigned int);
extern_signal RD(unsigned int,unsigned int);
extern_signal Write_Ack;
extern_signal Read_Data(unsigned int);
extern_signal CNTINTR(unsigned int);
// Local variables
signal start_clk;
clock clk;
bool clock_started;
unsigned int LIMIT; //write register
VS_int COUNT;
//temp vars
unsigned int data,width, addr;
```

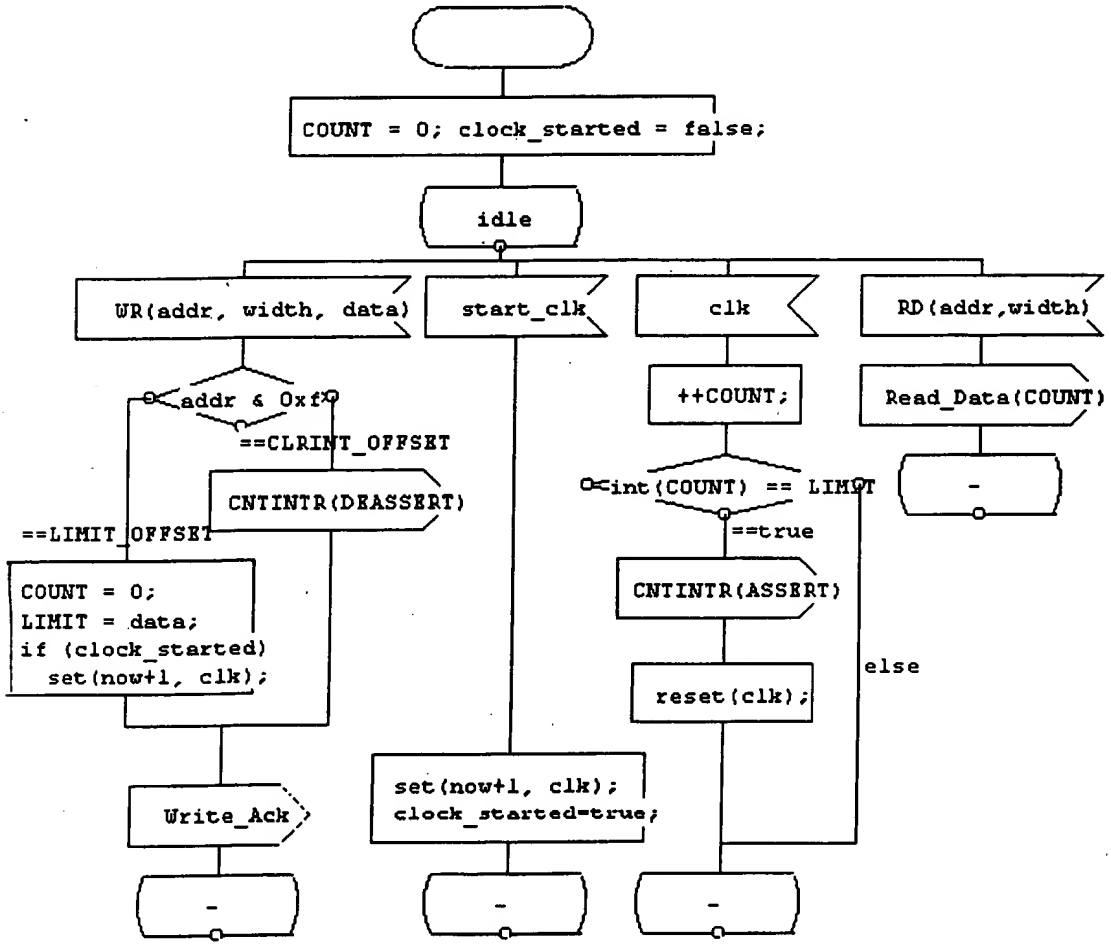

FIG. 20

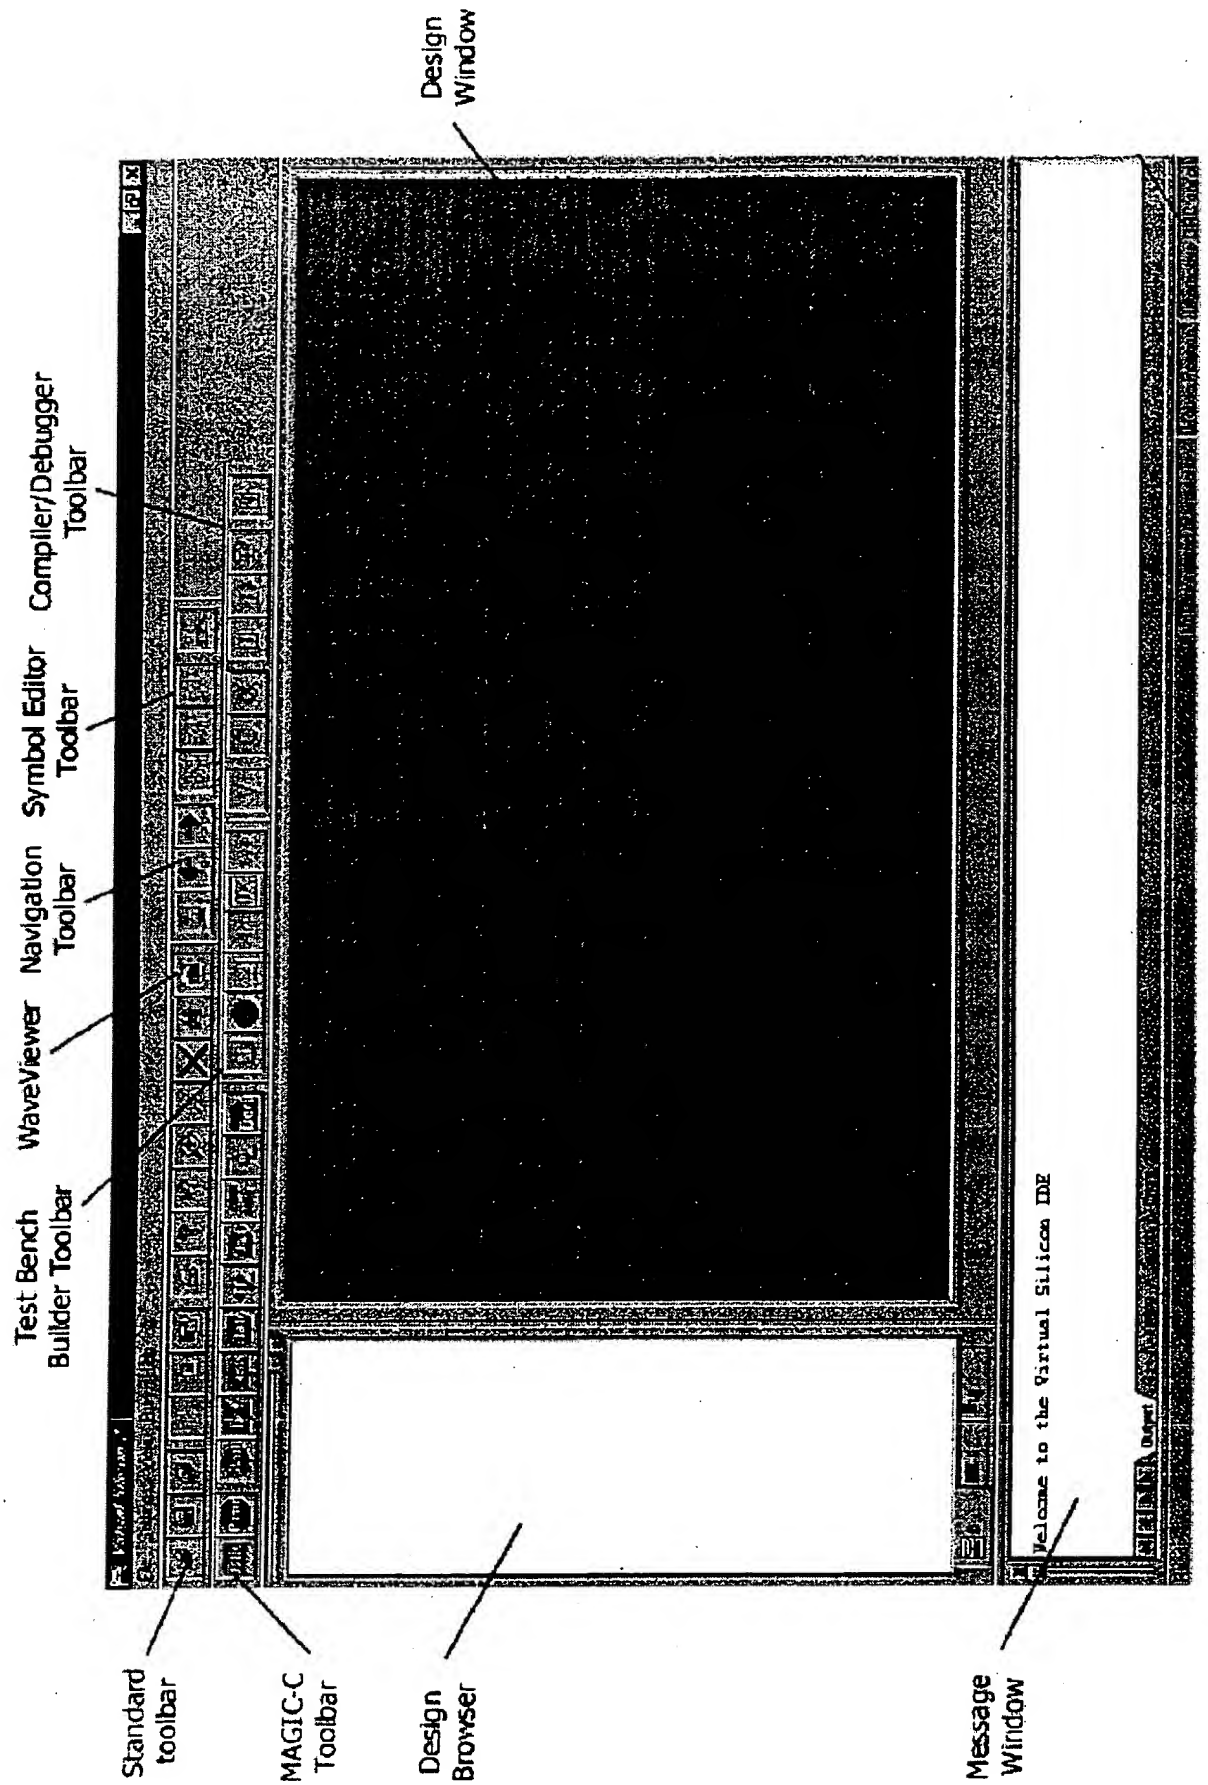
Design Window
Compiler/Debugger Toolbar
Symbol Editor Toolbar
Navigation Toolbar
WaveViewer
Test Bench Builder Toolbar
Standard toolbar
MAGIC-C Toolbar
Design Browser
Message Window
Welcome to the Virtual Silicon IDE

FIG. 21

FIG. 22

Standard Toolbar

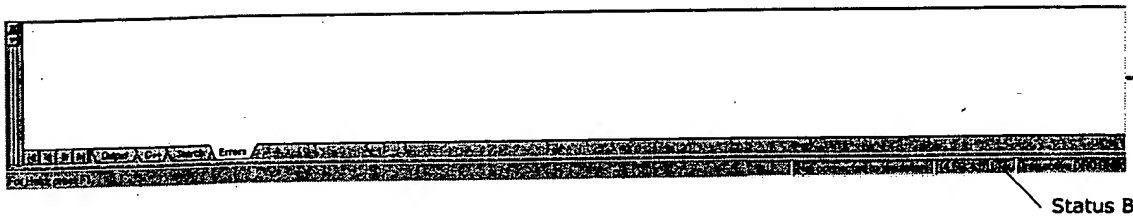

FIG 23

Message Window, Showing Different Message Tabs, and the Status Bar

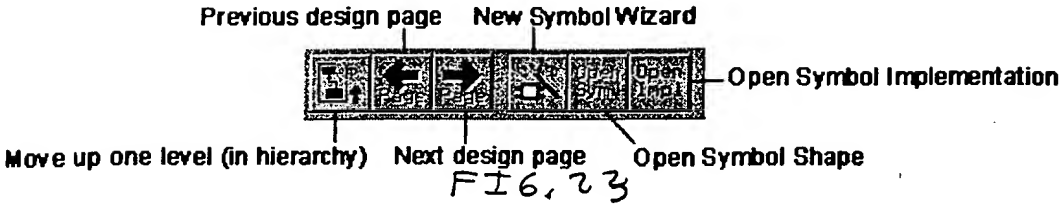

FIG. 23

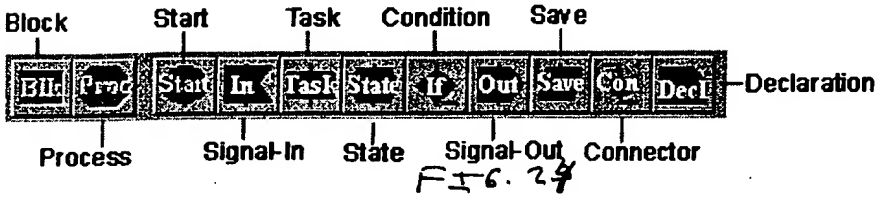

FIG. 24

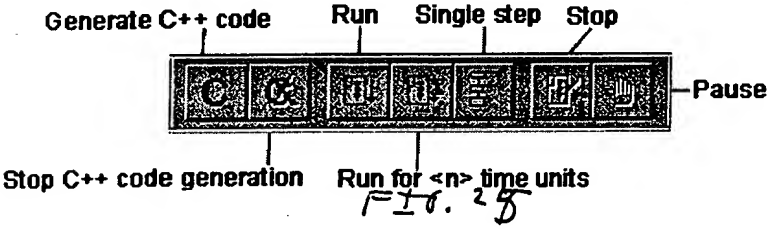

FIG. 25

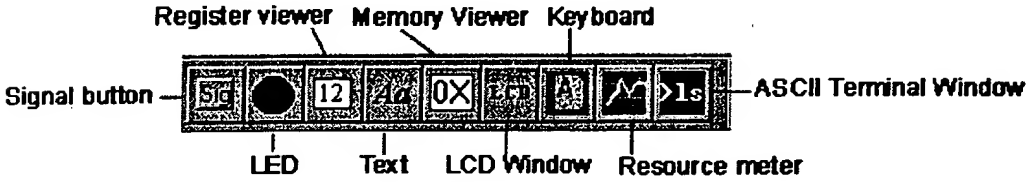

FIG. 26

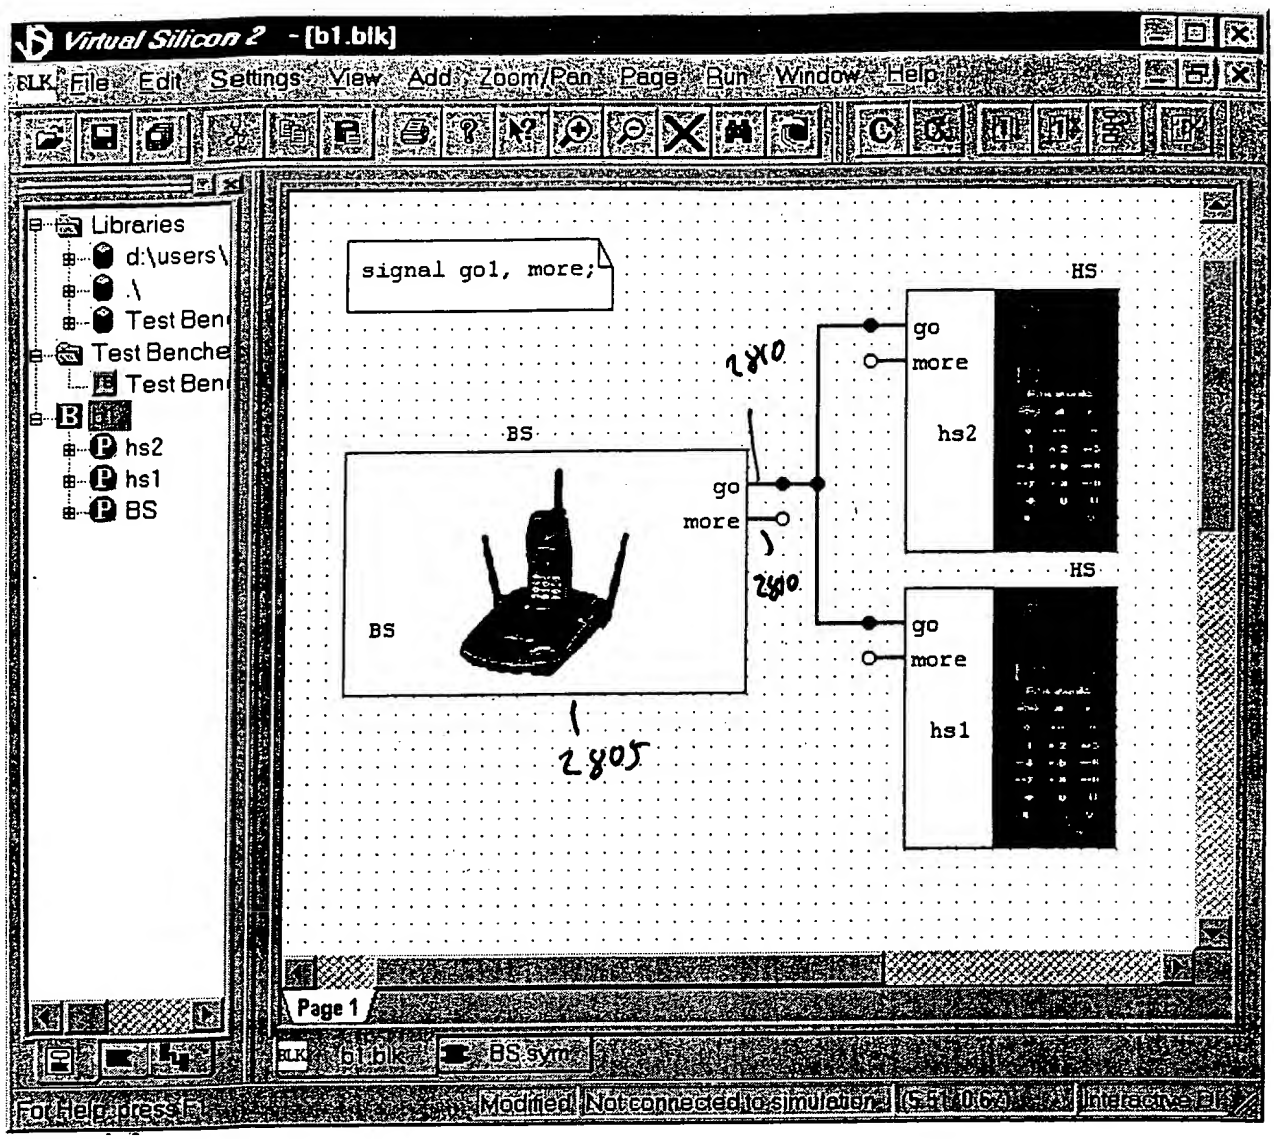
Virtual Silicon 2 - [b1.blk]
File Edit Settings View Add Zoom/Pan Page Run Window Help
Libraries
d:\users\
.\
Test Ben
Test Benche
Test Ben
hs2
hs1
BS
signal go1, more;
BS
go
more
BS
HS
go
more
hs2
HS
go
more
hs1
2810
2820
2805
Page 1
b1.blk
BS sym
Modified
Not connected to simulation

FIG. 28

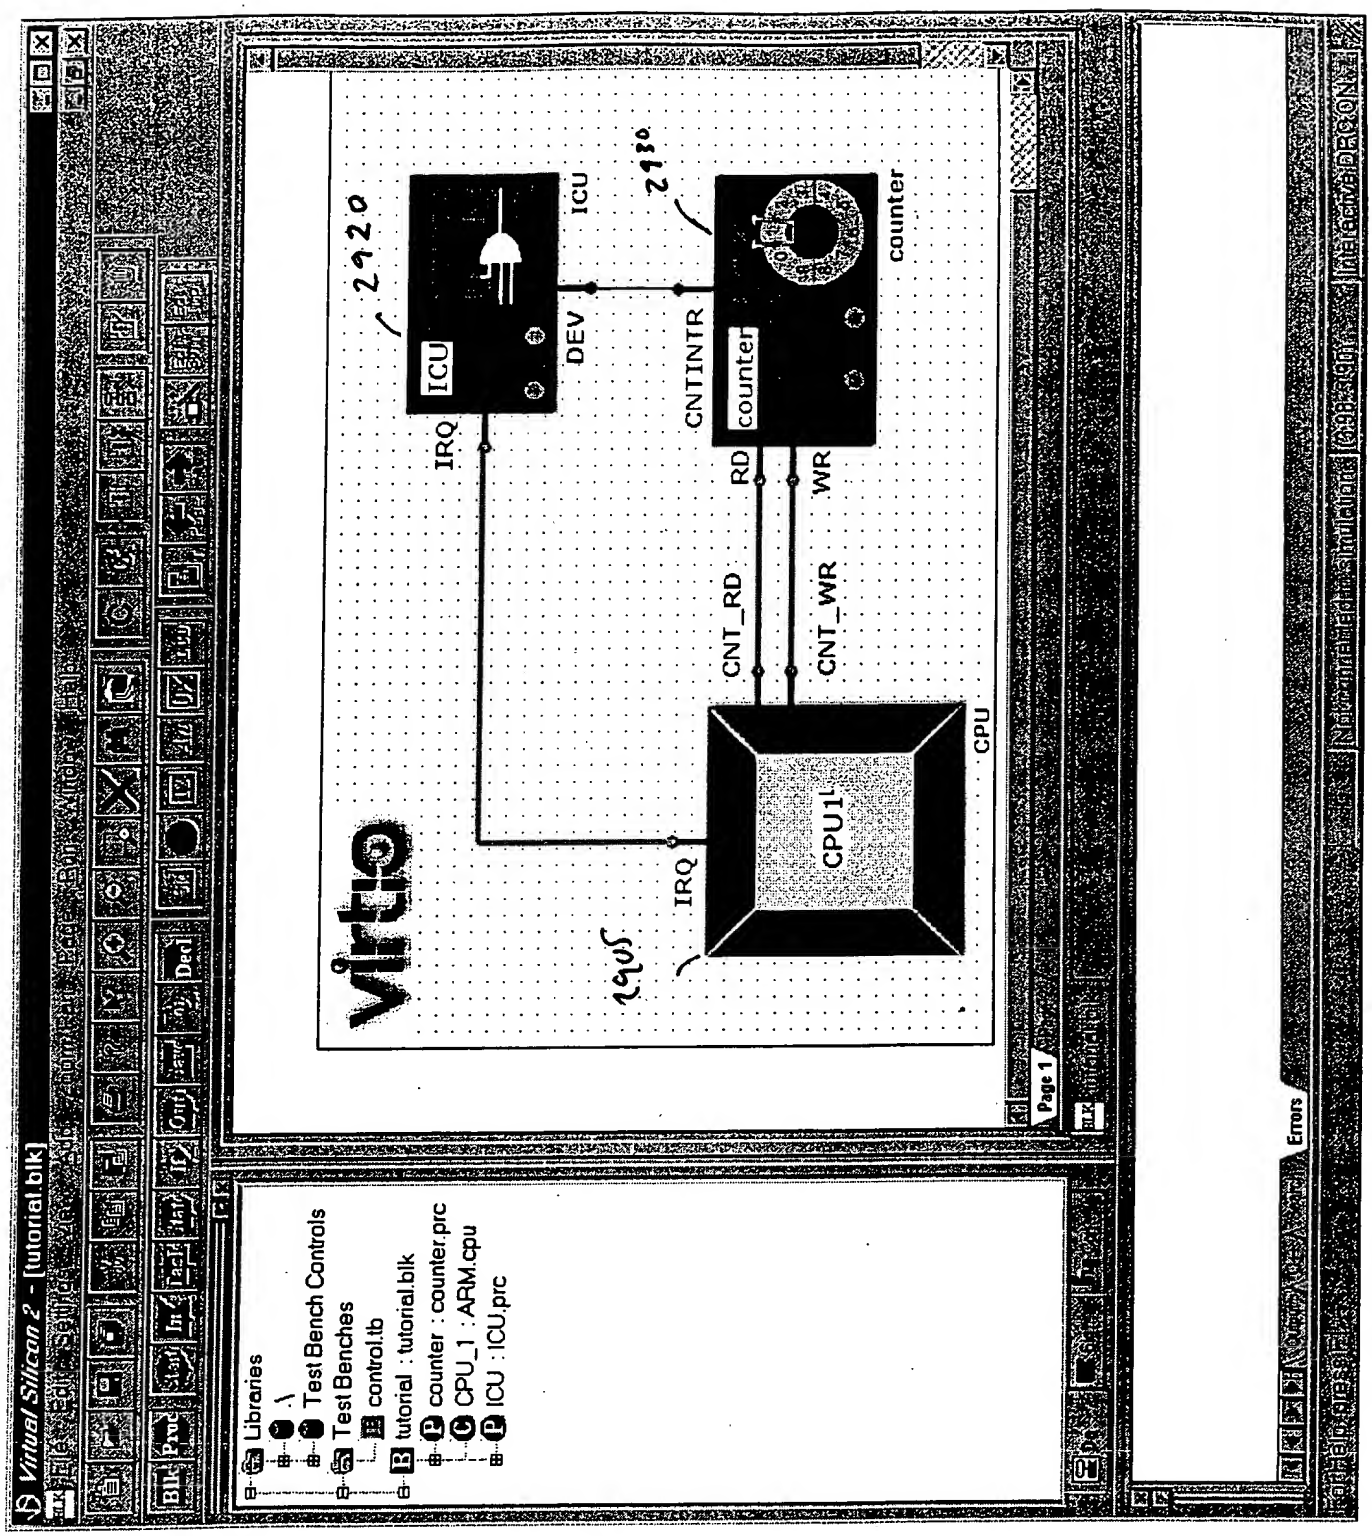
Virtual Silicon 2 - [tutorial.blk]
Libraries
Test Bench Controls
Test Benches
control.tb
tutorial : tutorial.blk
counter : counter.prc
CPU_1 : ARM.cpu
ICU : ICU.prc
virtio
2920
ICU
IRQ
DEV
ICU
2930
CNTINTR
counter
counter
RD
WR
CNT_RD
CNT_WR
2905
IRQ
CPU1
CPU
Page 1
Errors

FIG. 29

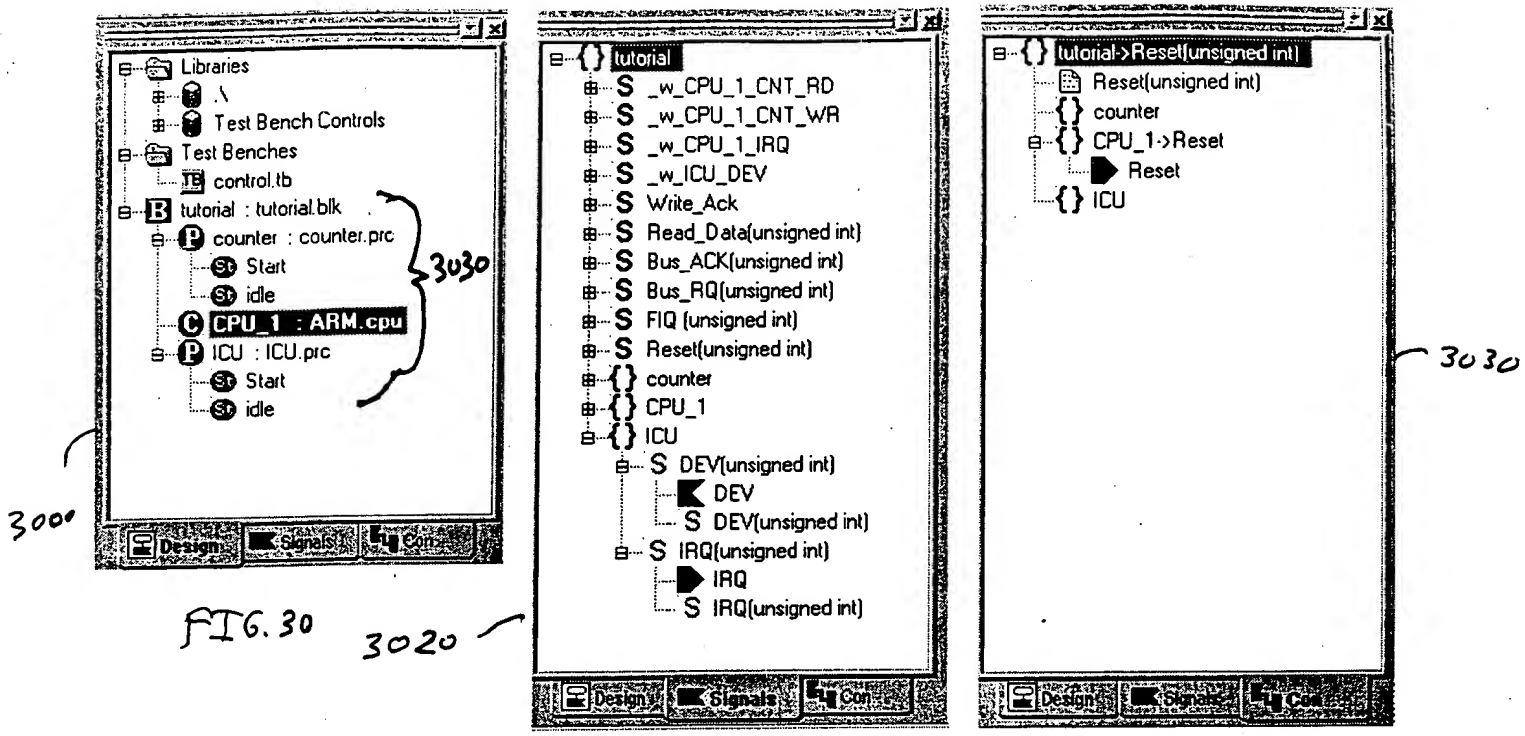
Libraries
.\
Test Bench Controls
Test Benches
control.tb
tutorial : tutorial.blk
counter : counter.prc
Start
idle
CPU_1 : ARM.cpu
ICU : ICU.prc
Start
idle
3030
3000
Design
Signals
tutorial
_w_CPU_1_CNT_RD
_w_CPU_1_CNT_WR
_w_CPU_1_IRQ
_w_ICU_DEV
Write_Ack
Read_Data(unsigned int)
Bus_ACK(unsigned int)
Bus_RQ(unsigned int)
FIQ (unsigned int)
Reset(unsigned int)
counter
CPU_1
ICU
DEV(unsigned int)
DEV
DEV(unsigned int)
IRQ(unsigned int)
IRQ
IRQ(unsigned int)
3020
tutorial->Reset(unsigned int)
Reset(unsigned int)
counter
CPU_1->Reset
Reset
ICU
3030

FIG. 30

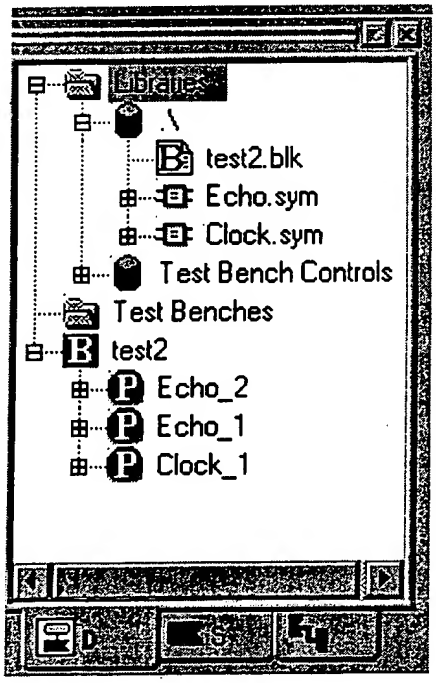
Libraries
.\
test2.blk
Echo.sym
Clock.sym
Test Bench Controls
Test Benches
test2
Echo_2
Echo_1
Clock_1

FIG. 31

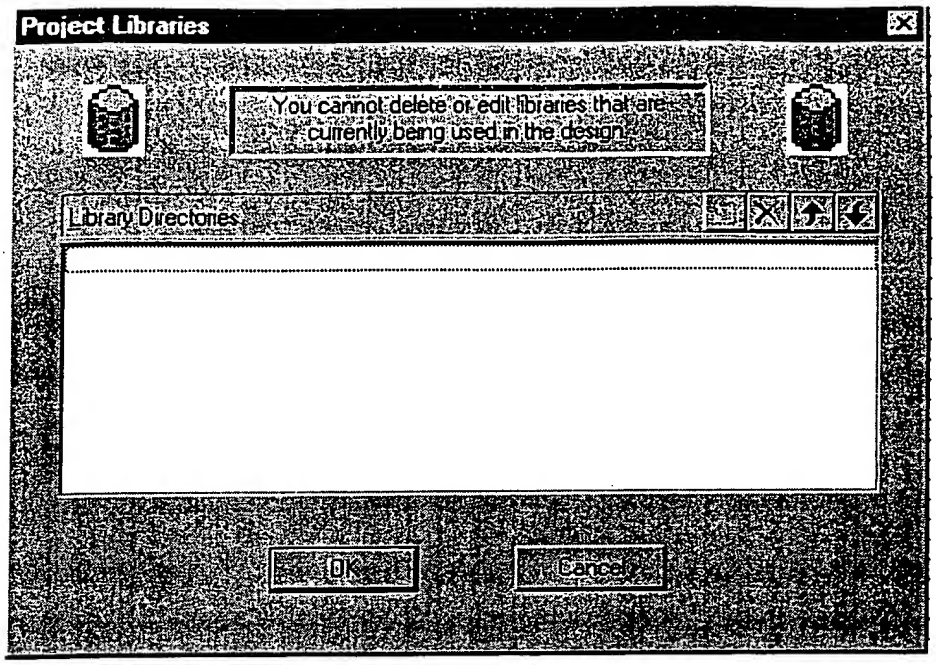
Project Libraries
You cannot delete or edit libraries that are currently being used in the design.
Library Directories
OK
Cancel

FIG.32

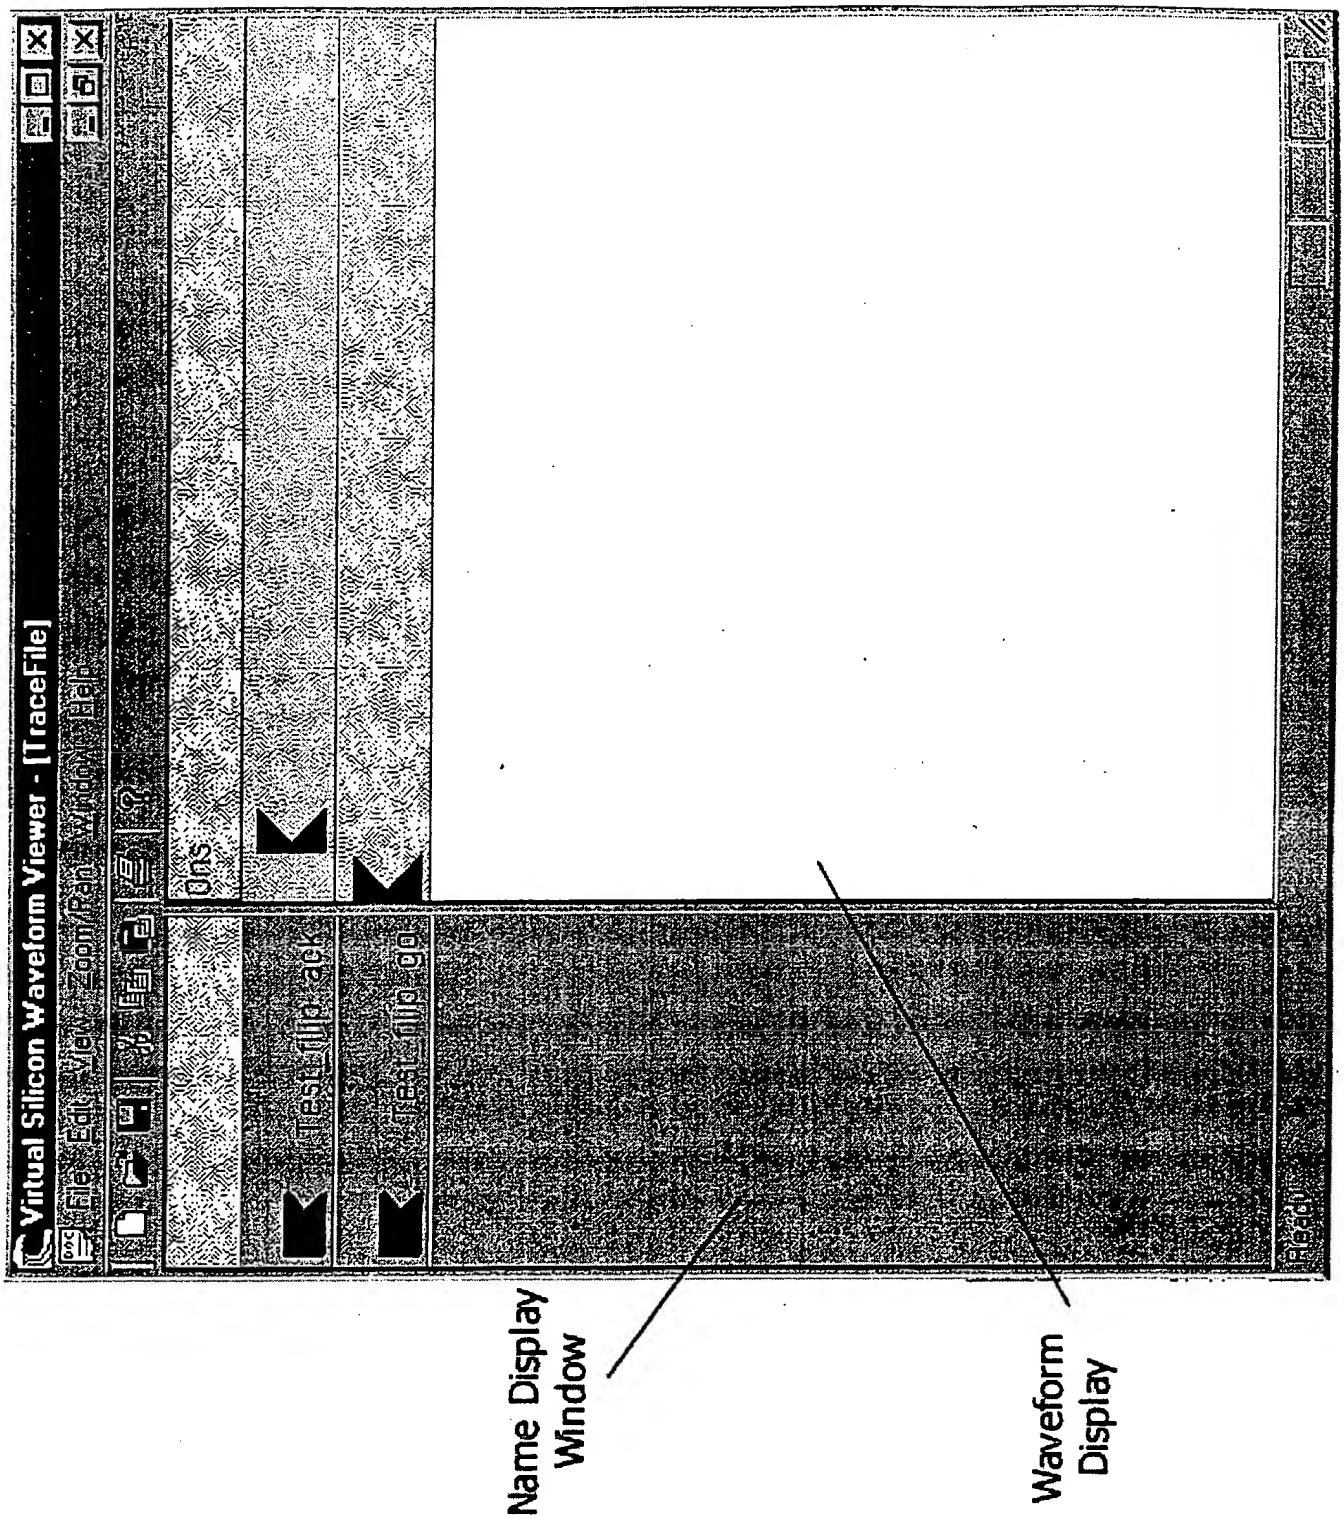
Virtual Silicon Waveform Viewer - [TraceFile]
File Edit View Zoom/Pan Window Help
Ons
Test_fifo_ack
Test_fifo_dq
Name Display Window
Waveform Display

FIG. 33A

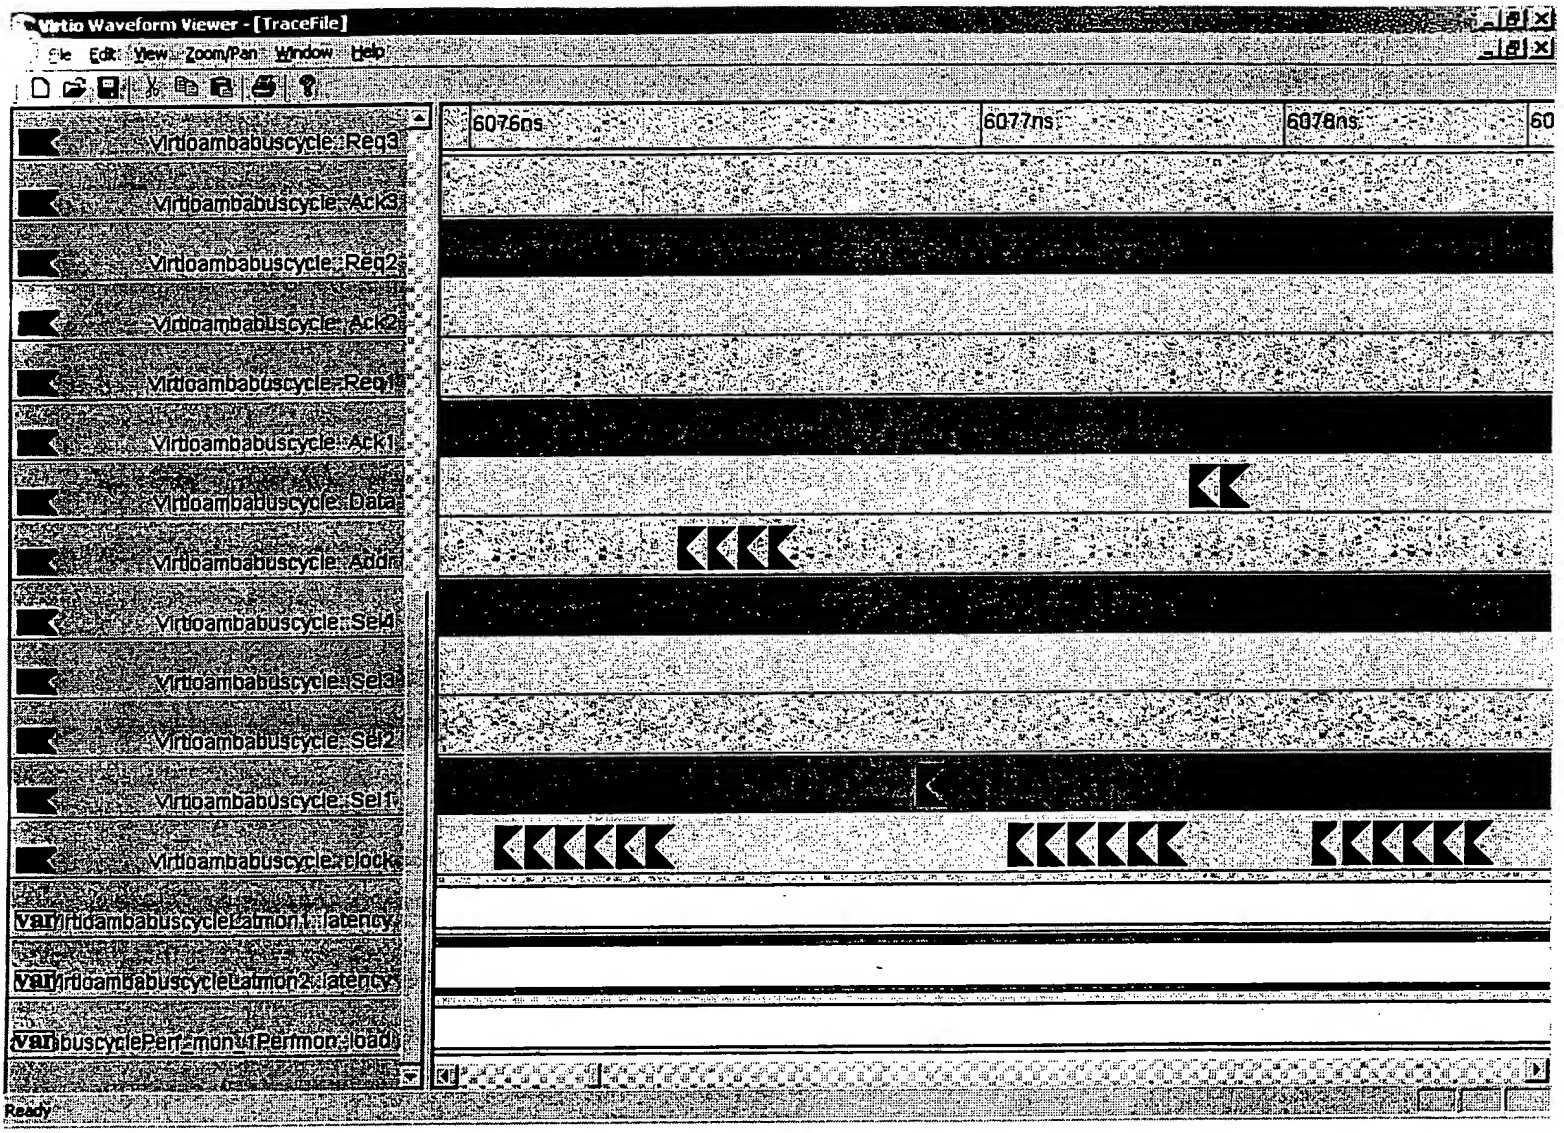
Virtio Waveform Viewer - [TraceFile]
File Edit View Zoom/Pan Window Help
6076ns
6077ns
6078ns
Virtioambabuscycle::Req3
Virtioambabuscycle::Ack3
Virtioambabuscycle::Req2
Virtioambabuscycle::Ack2
Virtioambabuscycle::Req1
Virtioambabuscycle::Ack1
Virtioambabuscycle::Data
Virtioambabuscycle::Addr
Virtioambabuscycle::Sel4
Virtioambabuscycle::Sel3
Virtioambabuscycle::Sel2
Virtioambabuscycle::Sel1
Virtioambabuscycle::clock
var Virtioambabuscycle::atmon1::latency
var Virtioambabuscycle::atmon2::latency
var buscyclePerf_mon::1Perfmon::load
Ready

FIG. 33B

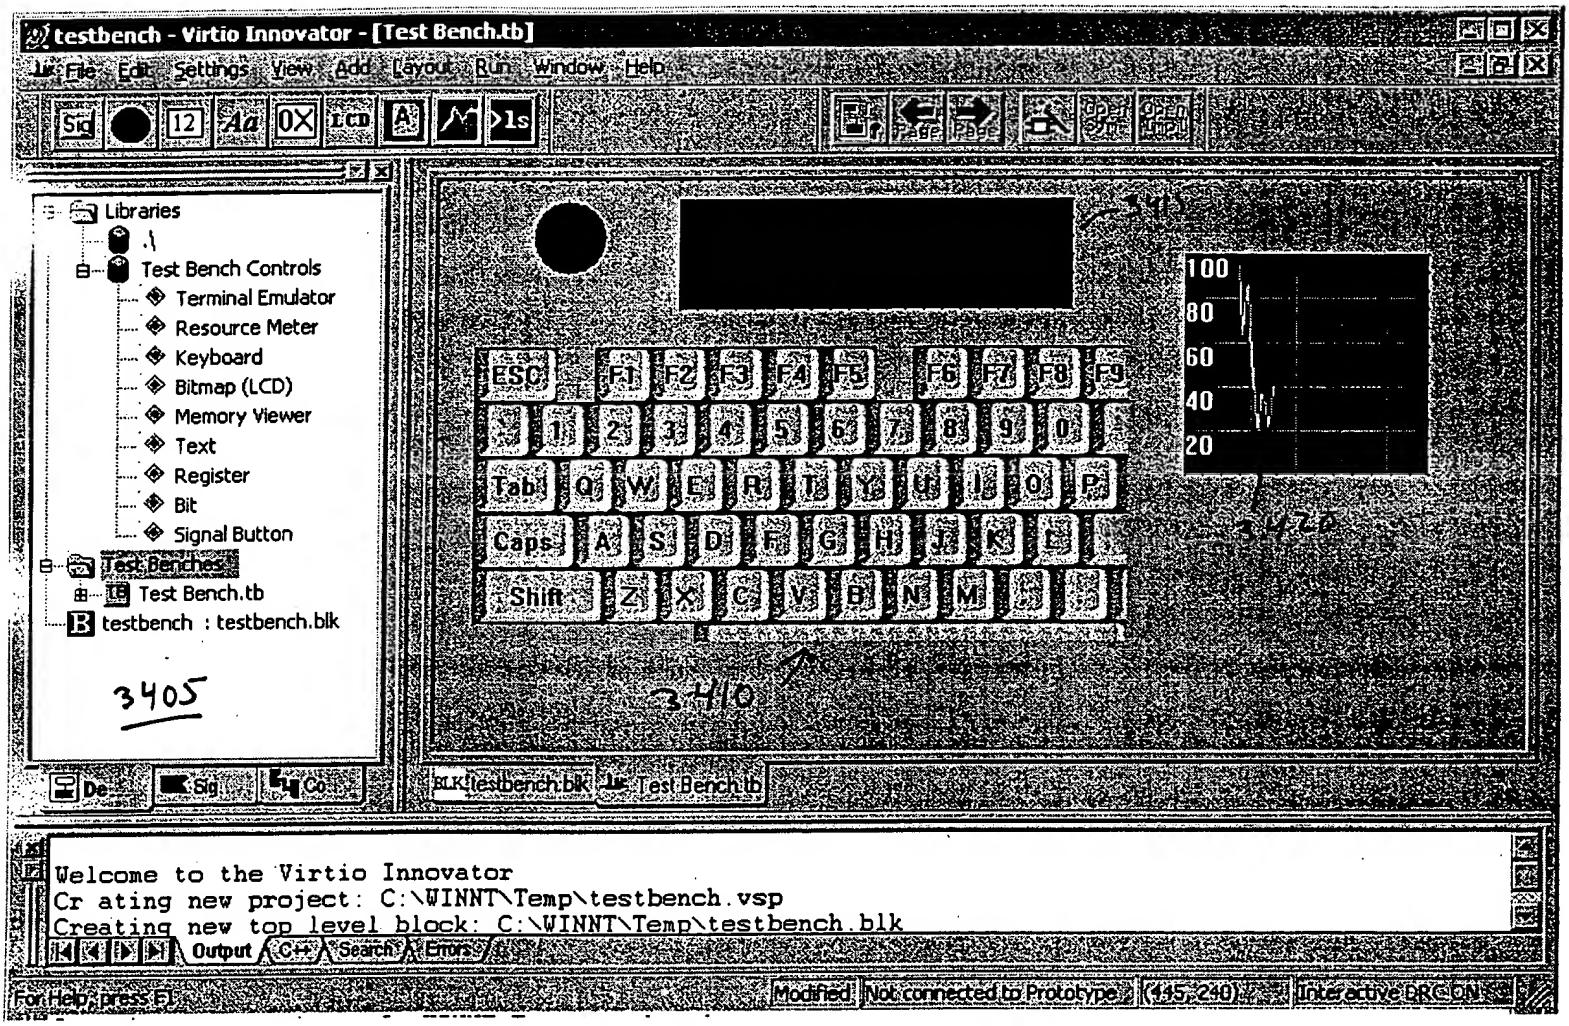
testbench - Virtio Innovator - [Test Bench.tb]
File Edit Settings View Add Layout Run Window Help
Libraries
.\
Test Bench Controls
Terminal Emulator
Resource Meter
Keyboard
Bitmap (LCD)
Memory Viewer
Text
Register
Bit
Signal Button
Test Benches
Test Bench.tb
testbench : testbench.blk
3405
3410
3415
3420
100
80
60
40
20
ESC F1 F2 F3 F4 F5 F6 F7 F8 F9
Tab Caps Shift
Welcome to the Virtio Innovator
Cr ating new project: C:\WINNT\Temp\testbench.vsp
Creating new top level block: C:\WINNT\Temp\testbench.blk
Output C++ Search Errors
For Help, press F1
Modified
Not connected to Prototype
(445, 240)
Interactive DRC ON

FIG. 34A

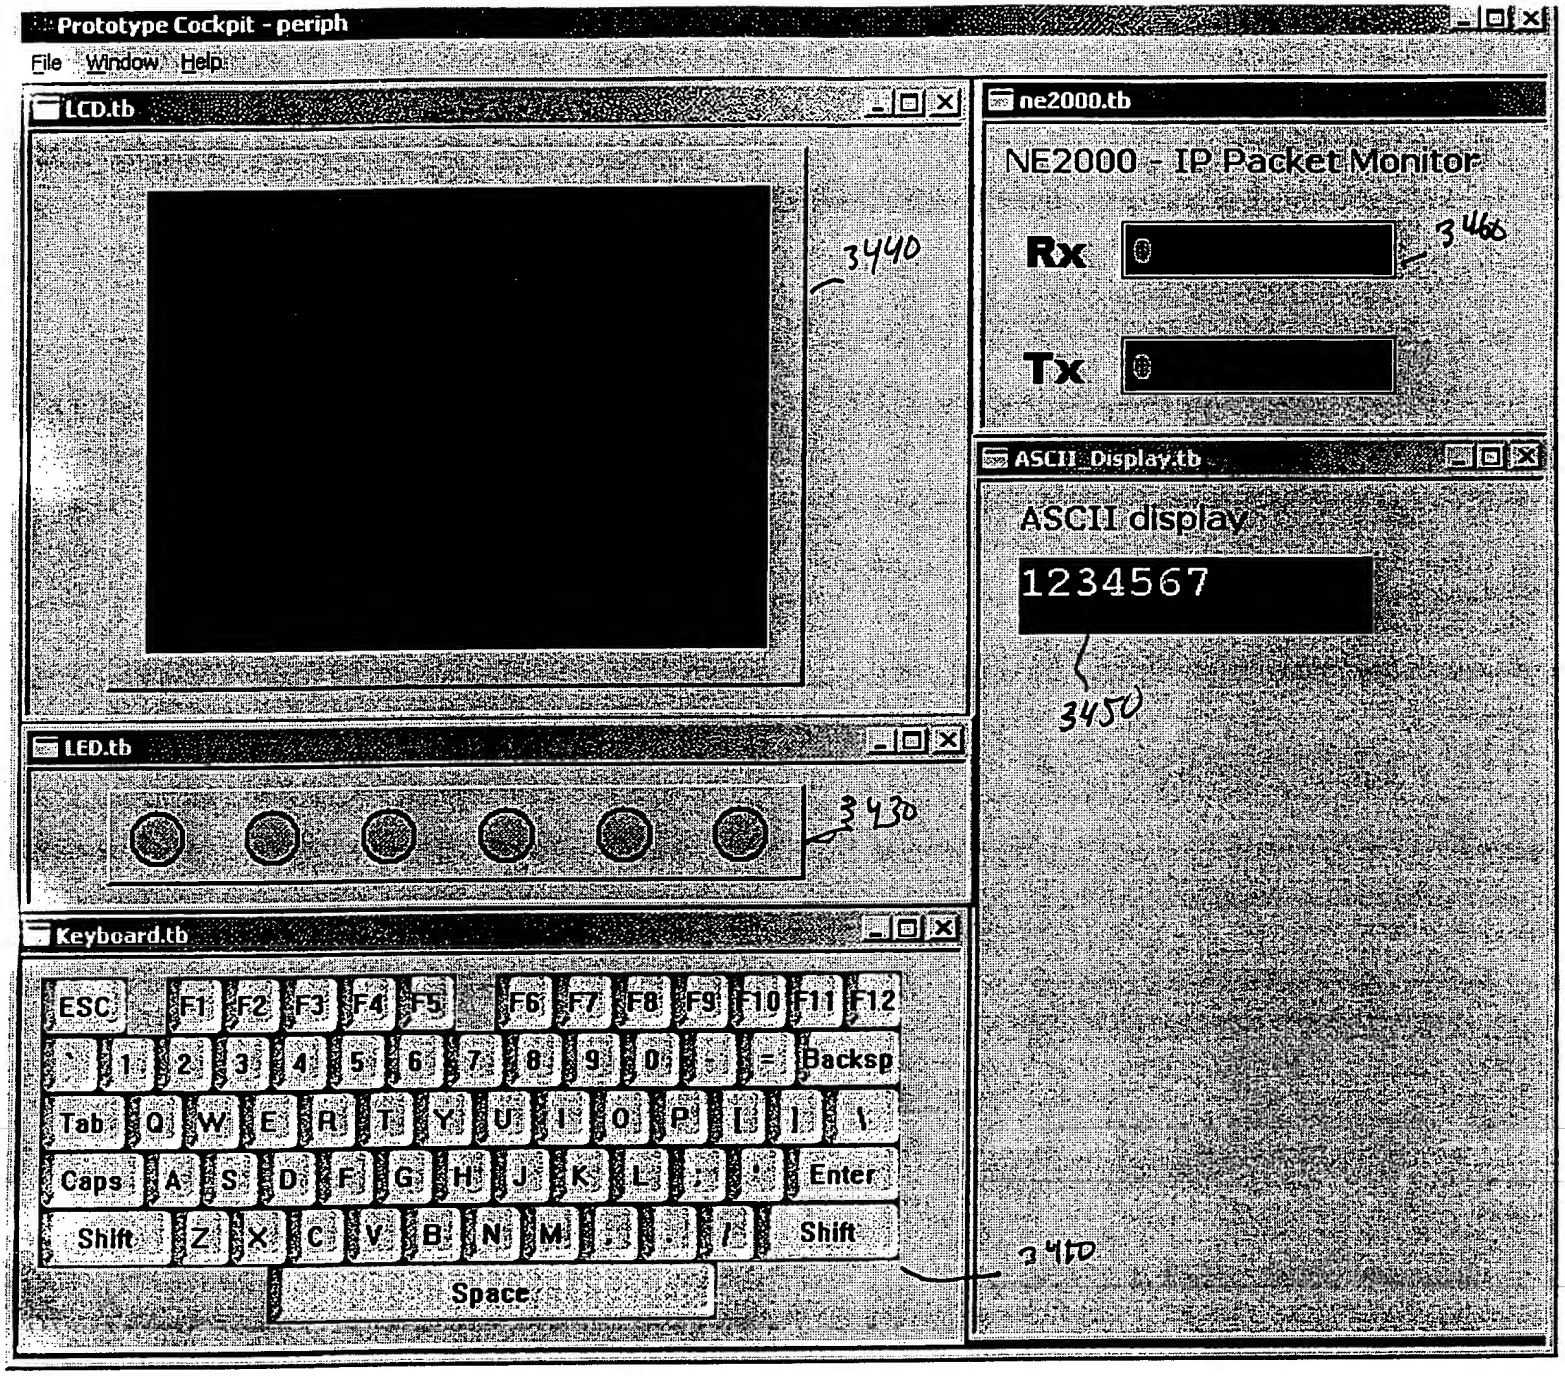
Prototype Cockpit - periph
File Window Help
LCD.tb
3440
ne2000.tb
NE2000 - IP Packet Monitor
Rx
Tx
3460
ASCII_Display.tb
ASCII display
1234567
3450
LED.tb
3430
Keyboard.tb
ESC F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12
` 1 2 3 4 5 6 7 8 9 0 - = Backsp
Tab Q W E R T Y U I O P [ ] \
Caps A S D F G H J K L ; ' Enter
Shift Z X C V B N M , . / Shift
Space
3470

FIG 34B

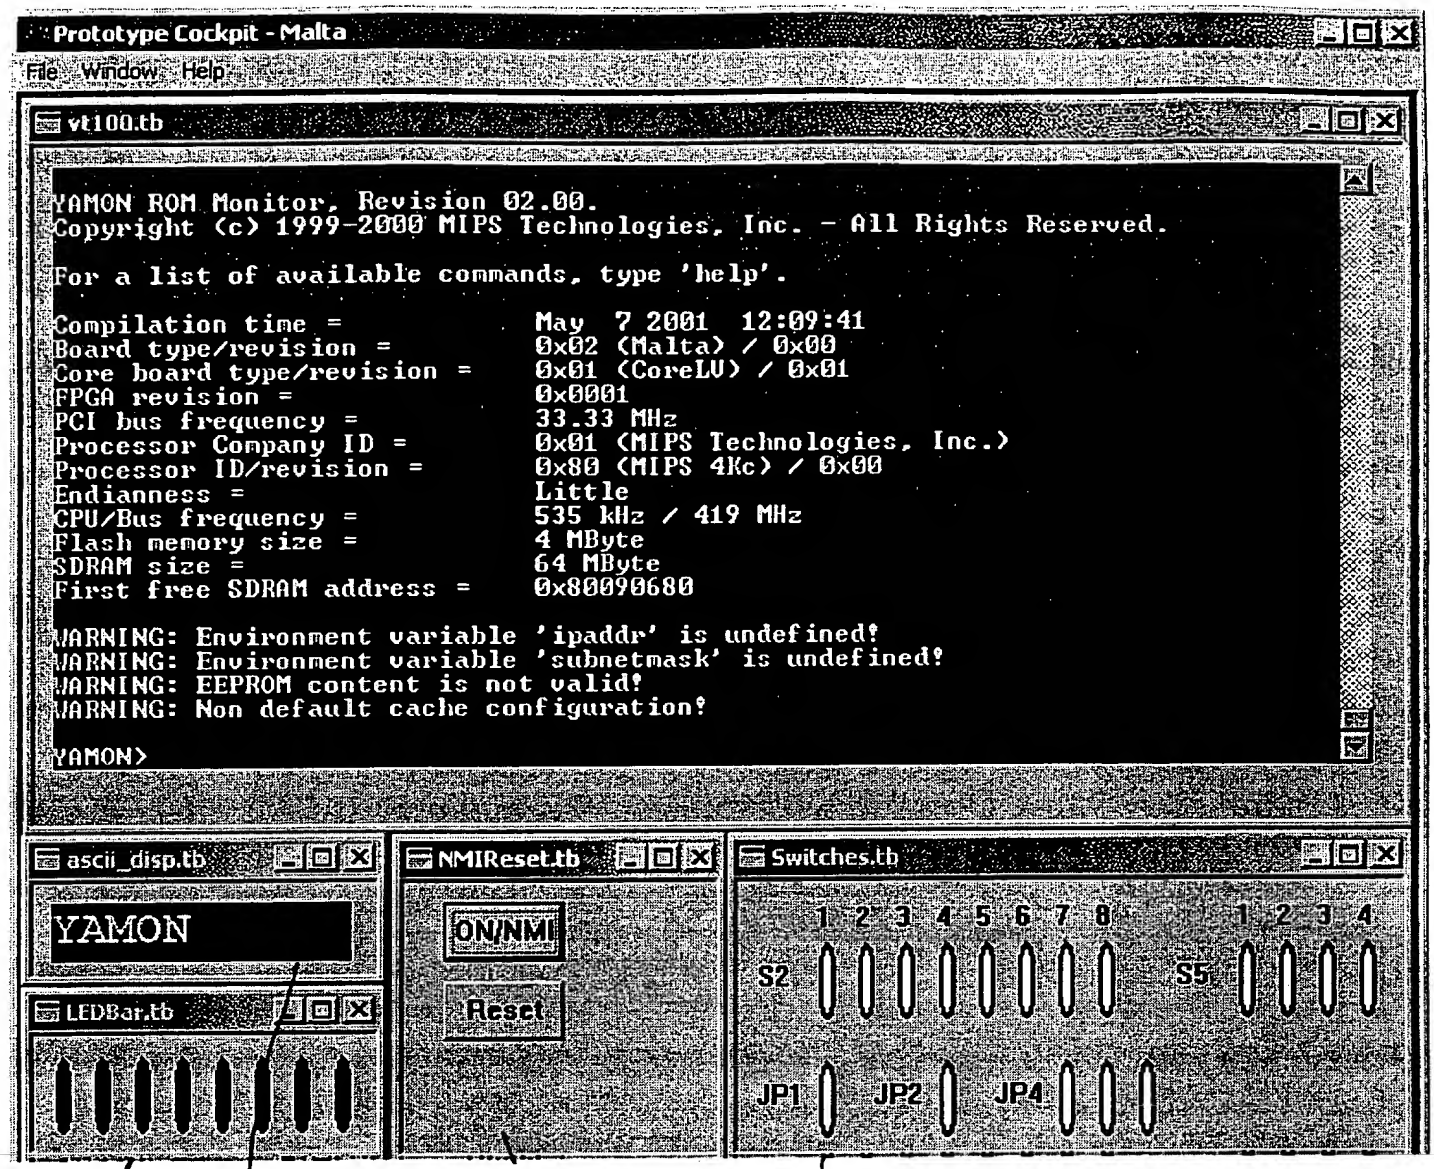
Prototype Cockpit - Malta
File Window Help
vt100.tb
YAMON ROM Monitor, Revision 02.00.
Copyright (c) 1999-2000 MIPS Technologies, Inc. - All Rights Reserved.
For a list of available commands, type 'help'.
Compilation time = May 7 2001 12:09:41
Board type/revision = 0x02 (Malta) / 0x00
Core board type/revision = 0x01 (CoreLV) / 0x01
FPGA revision = 0x0001
PCI bus frequency = 33.33 MHz
Processor Company ID = 0x01 (MIPS Technologies, Inc.)
Processor ID/revision = 0x80 (MIPS 4Kc) / 0x00
Endianness = Little
CPU/Bus frequency = 535 kHz / 419 MHz
Flash memory size = 4 MByte
SDRAM size = 64 MByte
First free SDRAM address = 0x80090680
WARNING: Environment variable 'ipaddr' is undefined!
WARNING: Environment variable 'subnetmask' is undefined!
WARNING: EEPROM content is not valid!
WARNING: Non default cache configuration!
YAMON>
ascii_disp.tb
YAMON
LEDBar.tb
NMIReset.tb
ON/NMI
Reset
Switches.tb
1 2 3 4 5 6 7 8
S2
1 2 3 4
S5
JP1
JP2
JP4
3480
3478
3470
3475

FIG. 34C

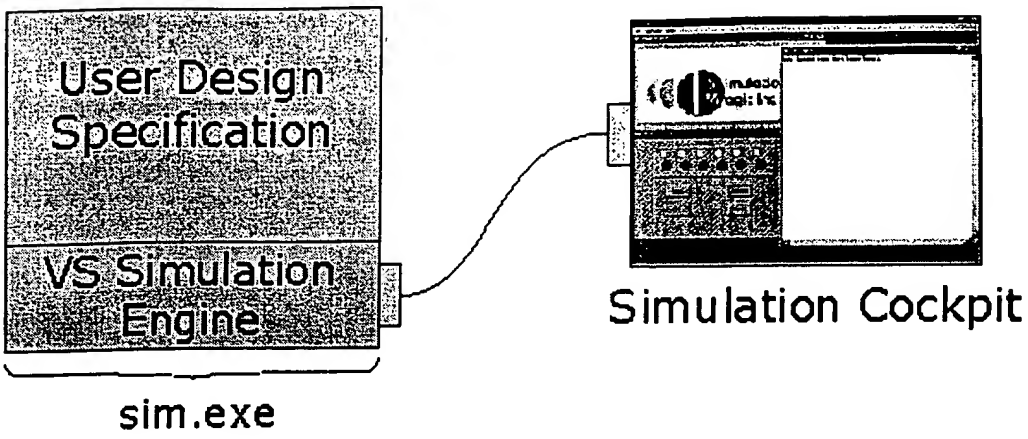
User Design Specification
VS Simulation Engine
sim.exe
Simulation Cockpit

FIG. 35

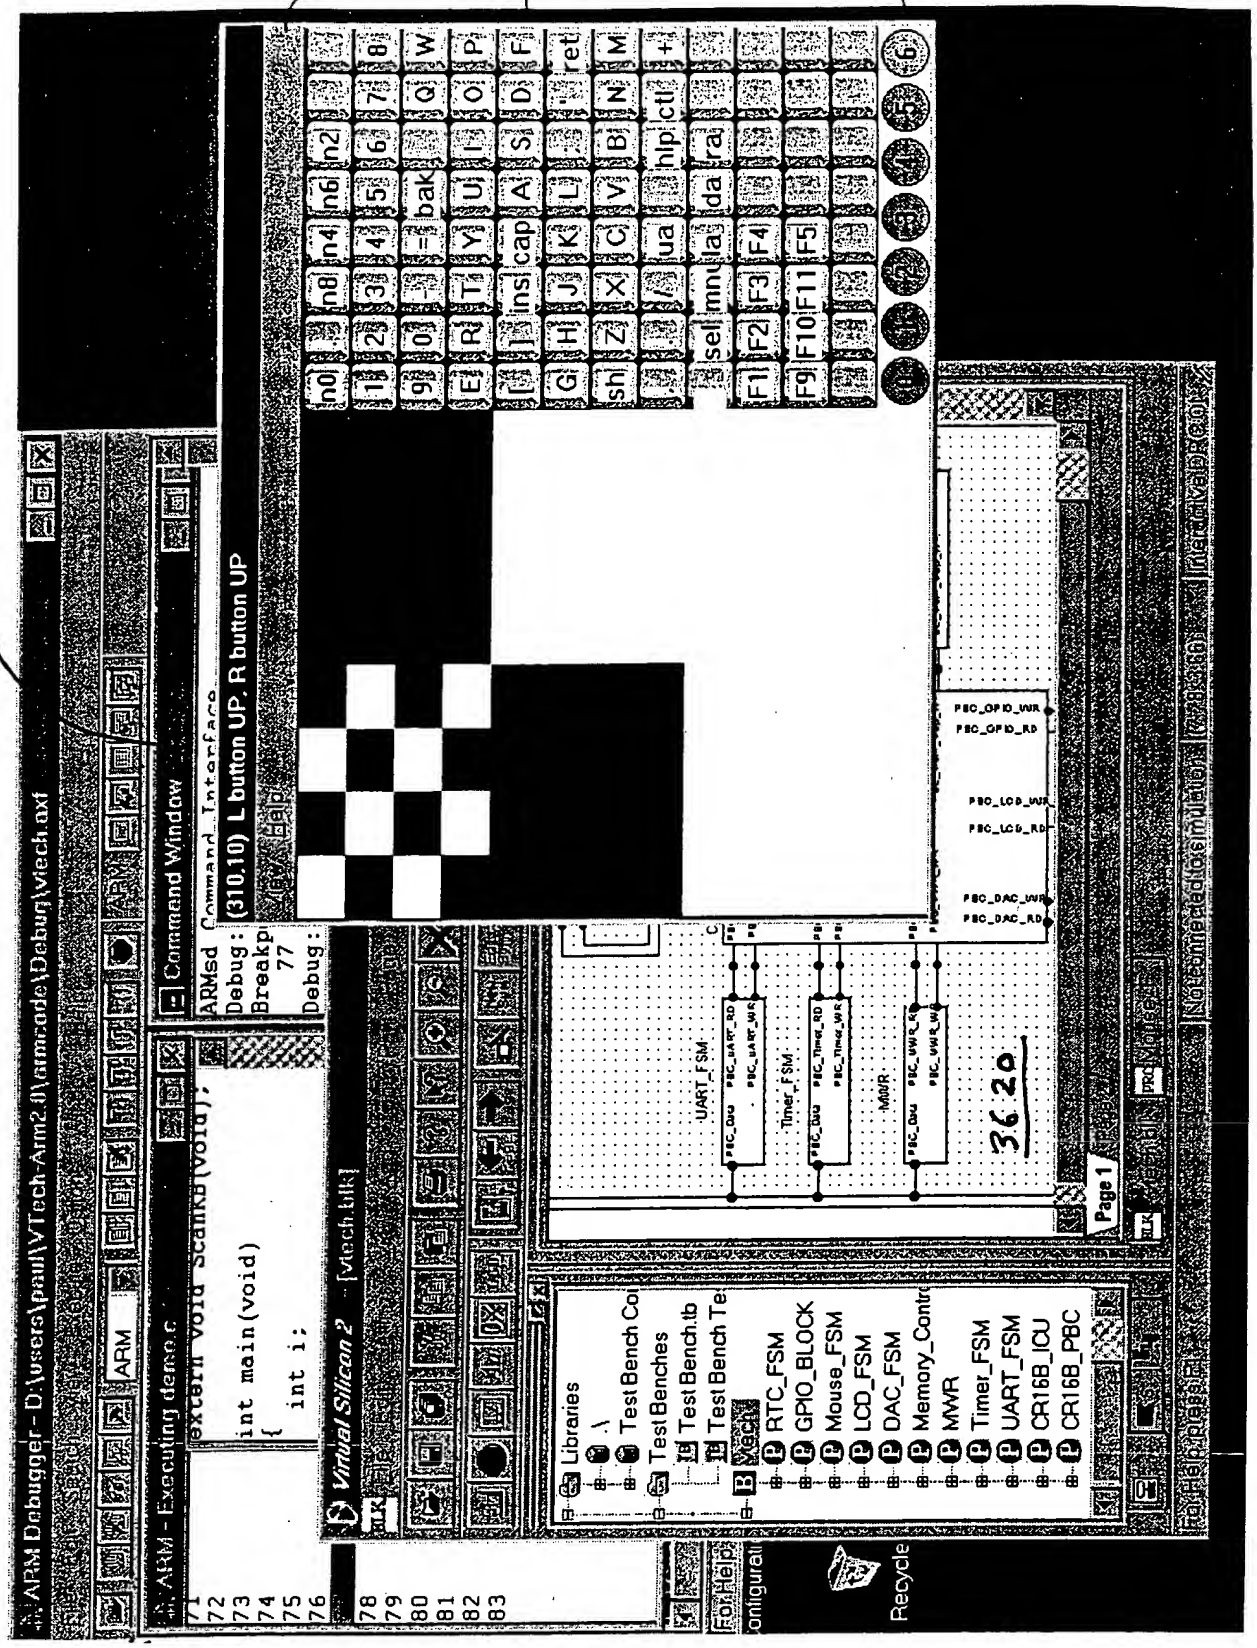
3605
3610
3685
3620
ARM Debugger - D:\Users\paul\VTech-Arm2.0\armcode\Debug\vtech.axf
Command Window
(310,10) L button UP, R button UP
Virtual Silicon 2 - [Mech.tlk]
Libraries
Test Benches
Mech
RTC_FSM
GPIO_BLOCK
Mouse_FSM
LCD_FSM
DAC_FSM
Memory_Contr
MWR
Timer_FSM
UART_FSM
CR16B_ICU
CR16B_PBC
UART_FSM
Timer_FSM
MWR
Page 1
Recycle

FIG. 36A

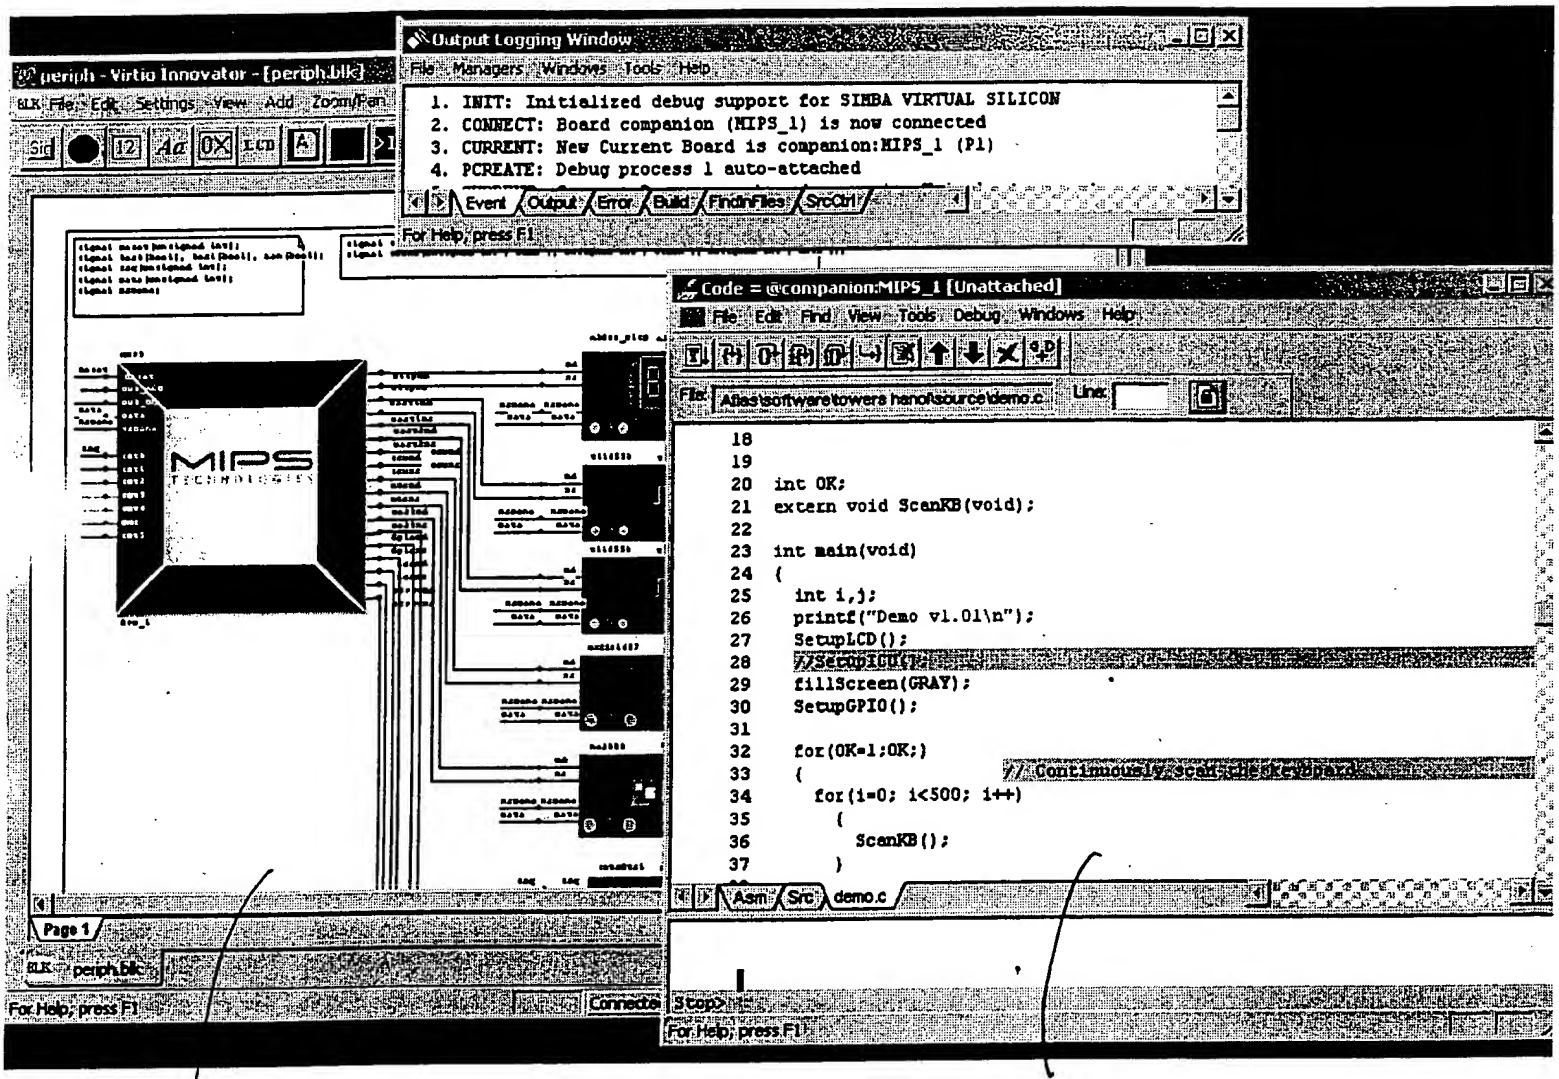
Output Logging Window
File Managers Windows Tools Help
1. INIT: Initialized debug support for SIMBA VIRTUAL SILICON
2. CONNECT: Board companion (MIPS_1) is now connected
3. CURRENT: New Current Board is companion:MIPS_1 (P1)
4. PCREATE: Debug process 1 auto-attached
Event Output Error Build FindInFiles SrcCtrl
For Help, press F1
periph - Virtio Innovator - [periph.blk]
File Edit Settings View Add Zoom/Pan
MIPS
Page 1
periph.blk
For Help, press F1
Connecte
Code = @companion:MIPS_1 [Unattached]
File Edit Find View Tools Debug Windows Help
File: Alias\software towers hanol\source\demo.c
Line:
18
19
20 int OK;
21 extern void ScanKB(void);
22
23 int main(void)
24 {
25 int i,j;
26 printf("Demo v1.01\n");
27 SetupLCD();
28 //SetupICU();
29 fillScreen(GRAY);
30 SetupGPIO();
31
32 for(OK=1;OK;)
33 { // Continuously scan checkerboard
34 for(i=0; i<500; i++)
35 {
36 ScanKB();
37 }
Asm Src demo.c
Stop>
For Help, press F1
3620
3685

FIG. 36B

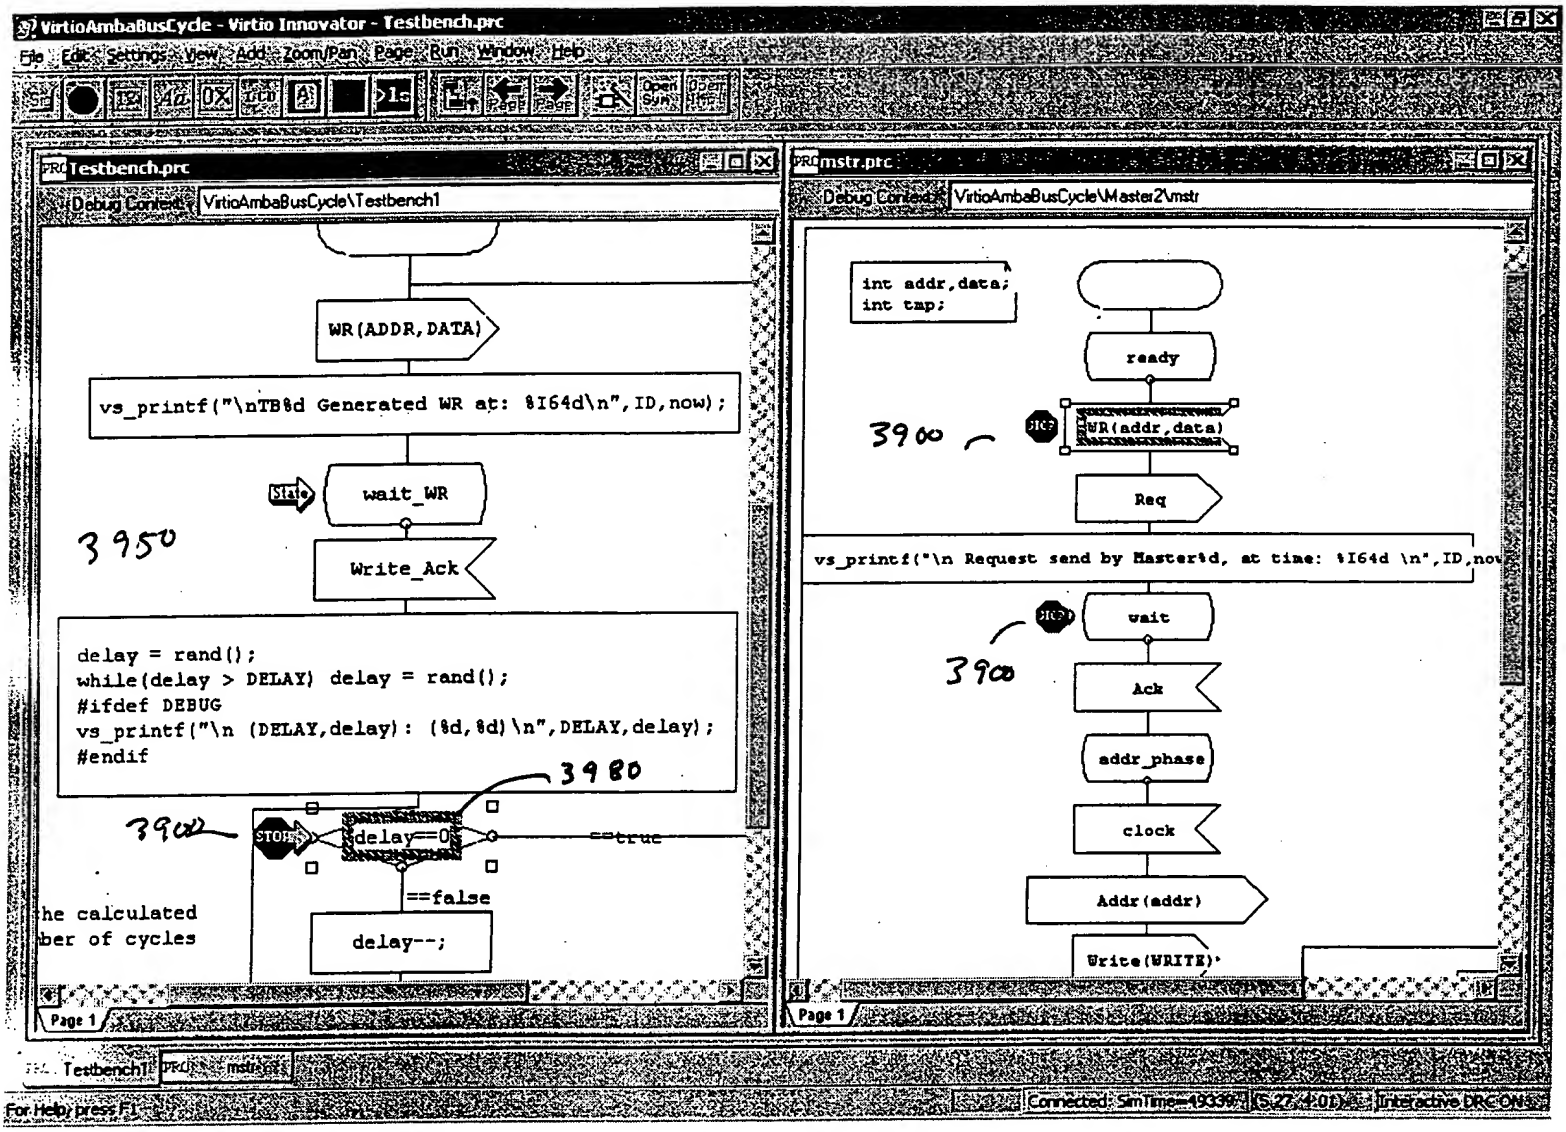
VirtioAmbaBusCycle - Virtio Innovator - Testbench.prc
File Edit Settings View Add Zoom/Pan Page Run Window Help
Testbench.prc
Debug Context: VirtioAmbaBusCycle\Testbench1
WR(ADDR,DATA)
vs_printf("\nTB%d Generated WR at: %I64d\n",ID,now);
State
wait_WR
3950
Write_Ack
delay = rand();
while(delay > DELAY) delay = rand();
#ifdef DEBUG
vs_printf("\n (DELAY,delay): (%d,%d)\n",DELAY,delay);
#endif
3980
3900
STOP
delay==0
==true
==false
delay--;
he calculated
ber of cycles
Page 1
mstr.prc
Debug Context: VirtioAmbaBusCycle\Master2\mstr
int addr,data;
int tmp;
ready
3900
WR(addr,data)
Req
vs_printf("\n Request send by Master%d, at time: %I64d \n",ID,now
wait
3900
Ack
addr_phase
clock
Addr(addr)
Write(WRITE)
Page 1
Testbench1
mstr.prc
For Help, press F1
Connected: SimTime=49396
Interactive DRC ON

FIG. 36C

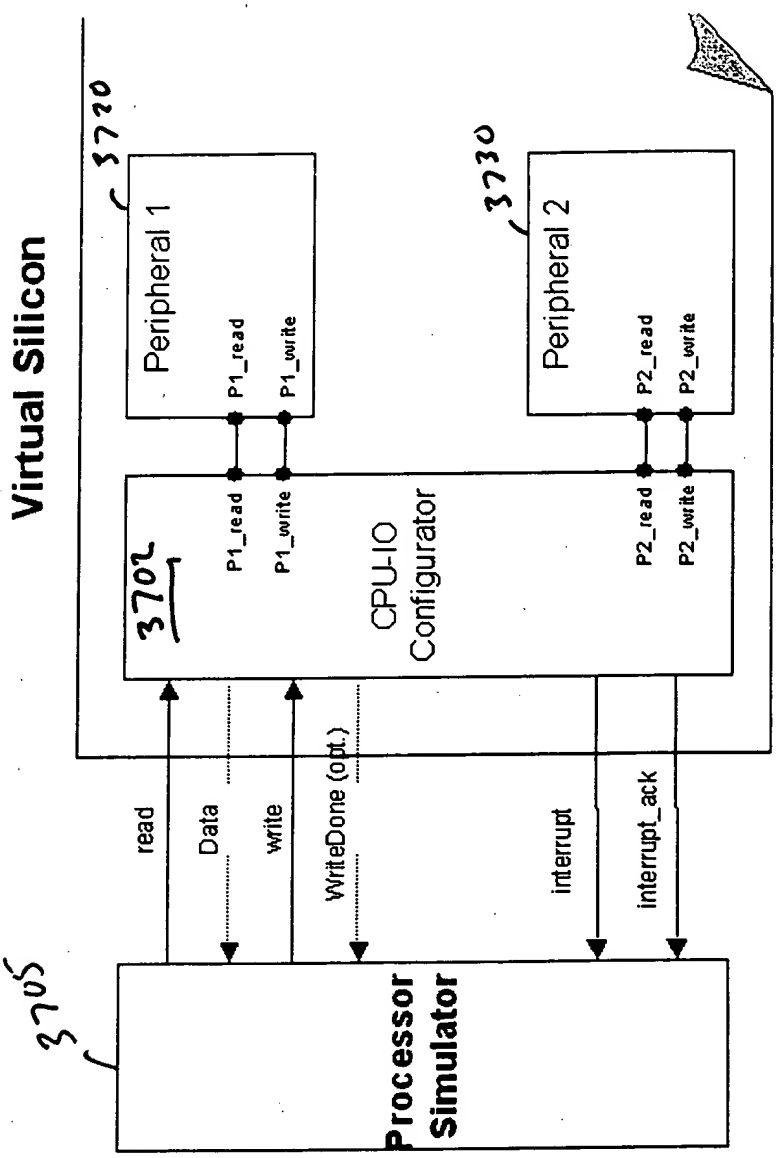
Virtual Silicon
3720
Peripheral 1
P1_read
P1_write
3730
Peripheral 2
P2_read
P2_write
3702
CPU-IO Configurator
P1_read
P1_write
P2_read
P2_write
read
Data
write
WriteDone (opt.)
interrupt
interrupt_ack
3705
Processor Simulator

FIG. 37

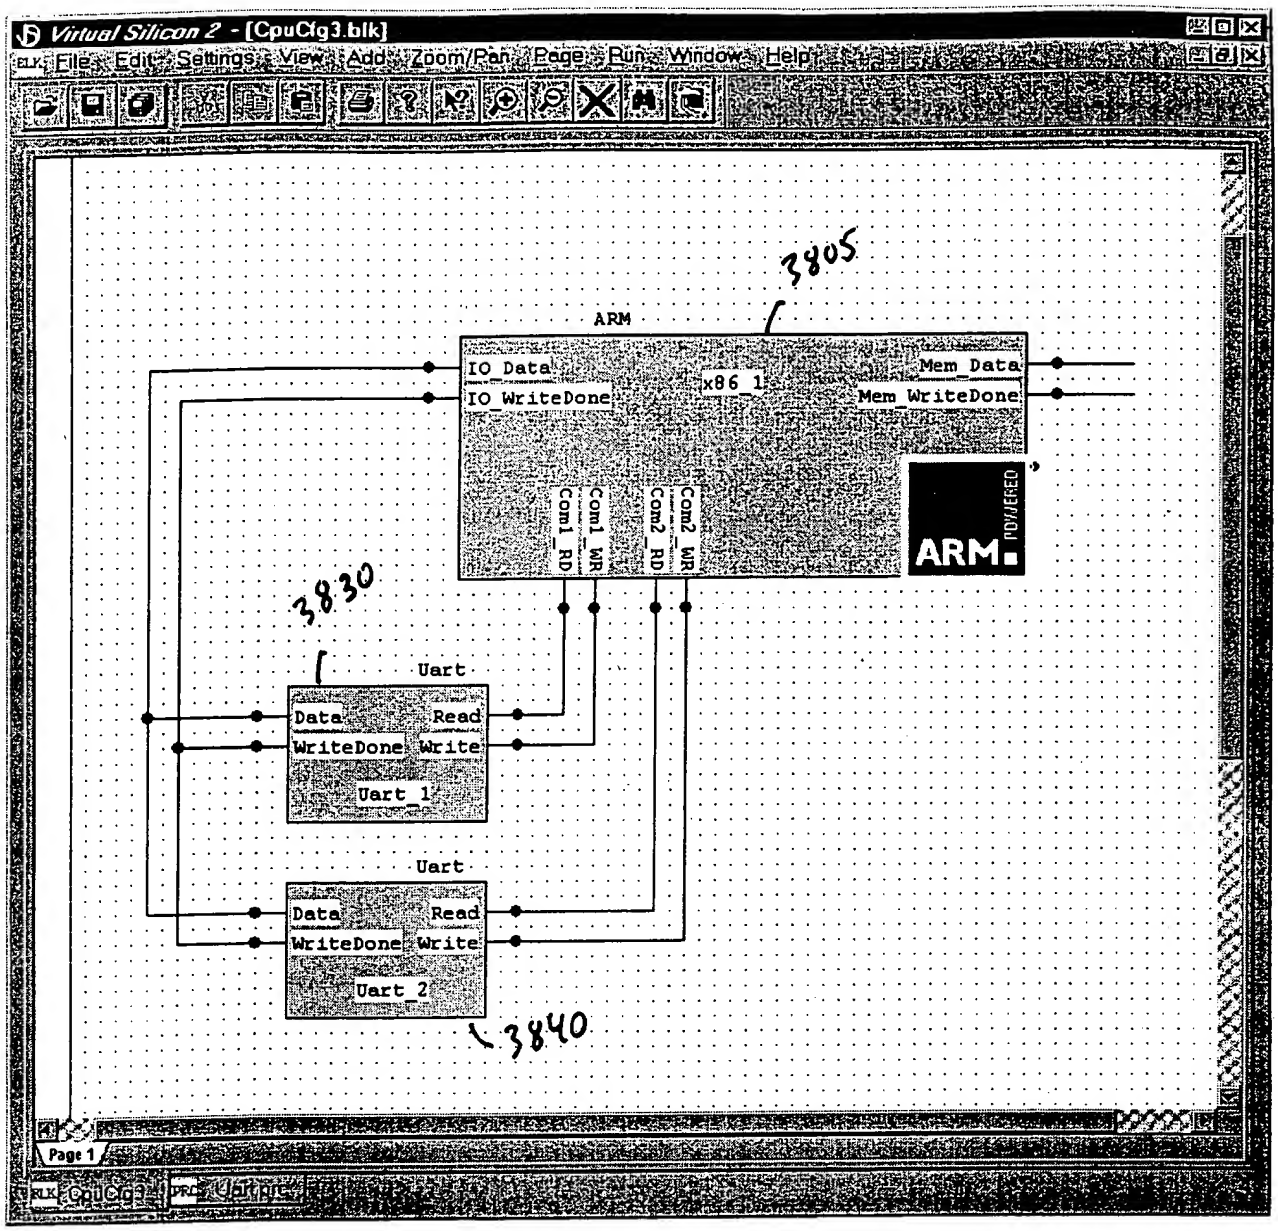
Virtual Silicon 2 - [CpuCfg3.blk]
File Edit Settings View Add Zoom/Pan Page Run Window Help
3805
ARM
IO_Data
IO_WriteDone
x86_1
Mem_Data
Mem_WriteDone
Com1_RD
Com1_WR
Com2_RD
Com2_WR
ARM
3830
Uart
Data
Read
WriteDone
Write
Uart_1
Uart
Data
Read
WriteDone
Write
Uart_2
3840
Page 1
CpuCfg3
UartPrj

FIG. 38

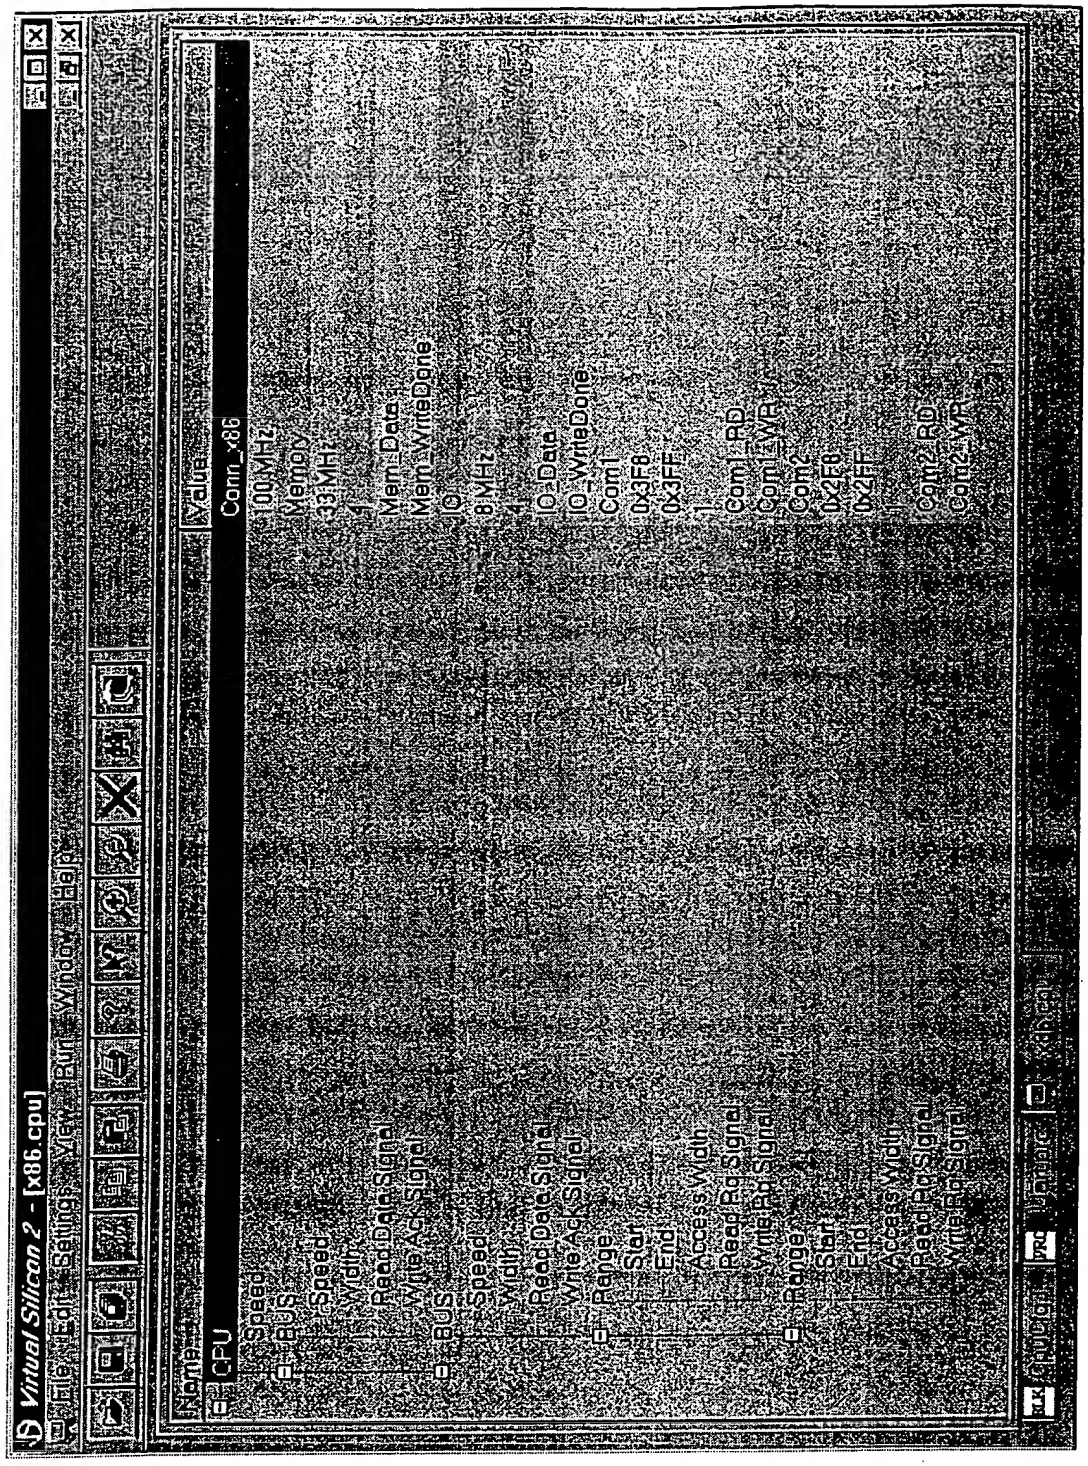
Virtual Silicon 2 - [x86.cpu]
File Edit Settings View Run Window Help
Name
Value
CPU
Core_x86
Speed
100 MHz
BUS
Memory
Speed
33 MHz
Width
Read Data Signal
Mem_Data
Write Ack Signal
Mem_WriteDone
BUS
IO
Speed
8 MHz
Width
Read Data Signal
IO_Data
Write Ack Signal
IO_WriteDone
Range
Com1
Start
0x3F8
End
0x3FF
Access Width
Read Rq Signal
Com1_RD
Write Rq Signal
Com1_WR
Range
Com2
Start
0x2F8
End
0x2FF
Access Width
Read Rq Signal
Com2_RD
Write Rq Signal
Com2_WR

FIG. 39

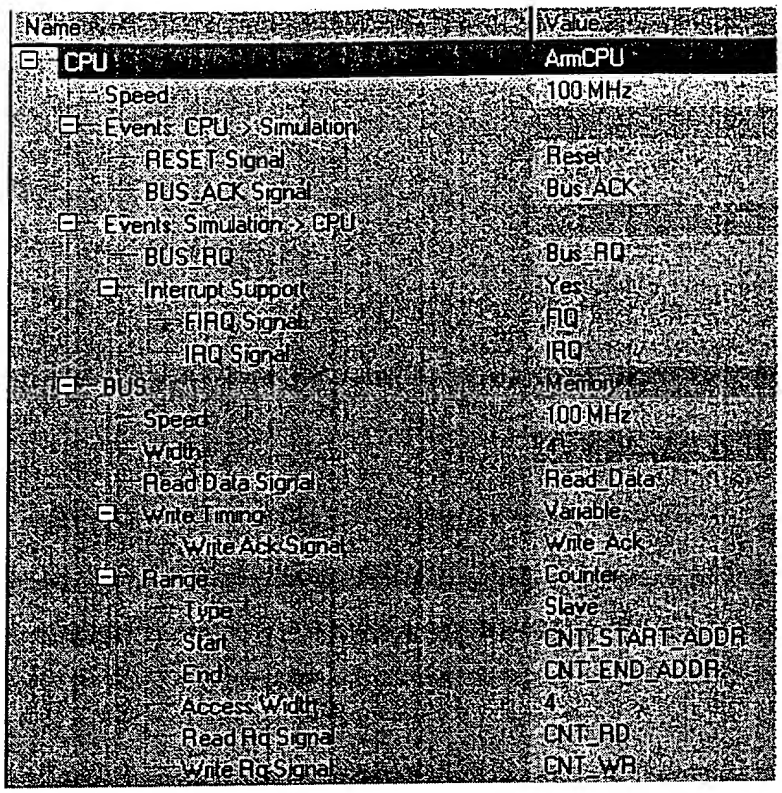
Name
Value
CPU
ArmCPU
Speed
100 MHz
Events: CPU -> Simulation
RESET Signal
Reset
BUS ACK Signal
Bus ACK
Events: Simulation -> CPU
BUS RQ
Bus RQ
Interrupt Support
Yes
FIRQ Signal
FIQ
IRQ Signal
IRQ
BUS
Memory
Speed
100 MHz
Width
Read Data Signal
Read Data
Write Timing
Variable
Write Ack Signal
Write Ack
Range
Counter
Type
Slave
Start
CNT_START_ADDR
End
CNT_END_ADDR
Access Width
4
Read Rq Signal
CNT_RD
Write Rq Signal
CNT_WR

FIG. 40

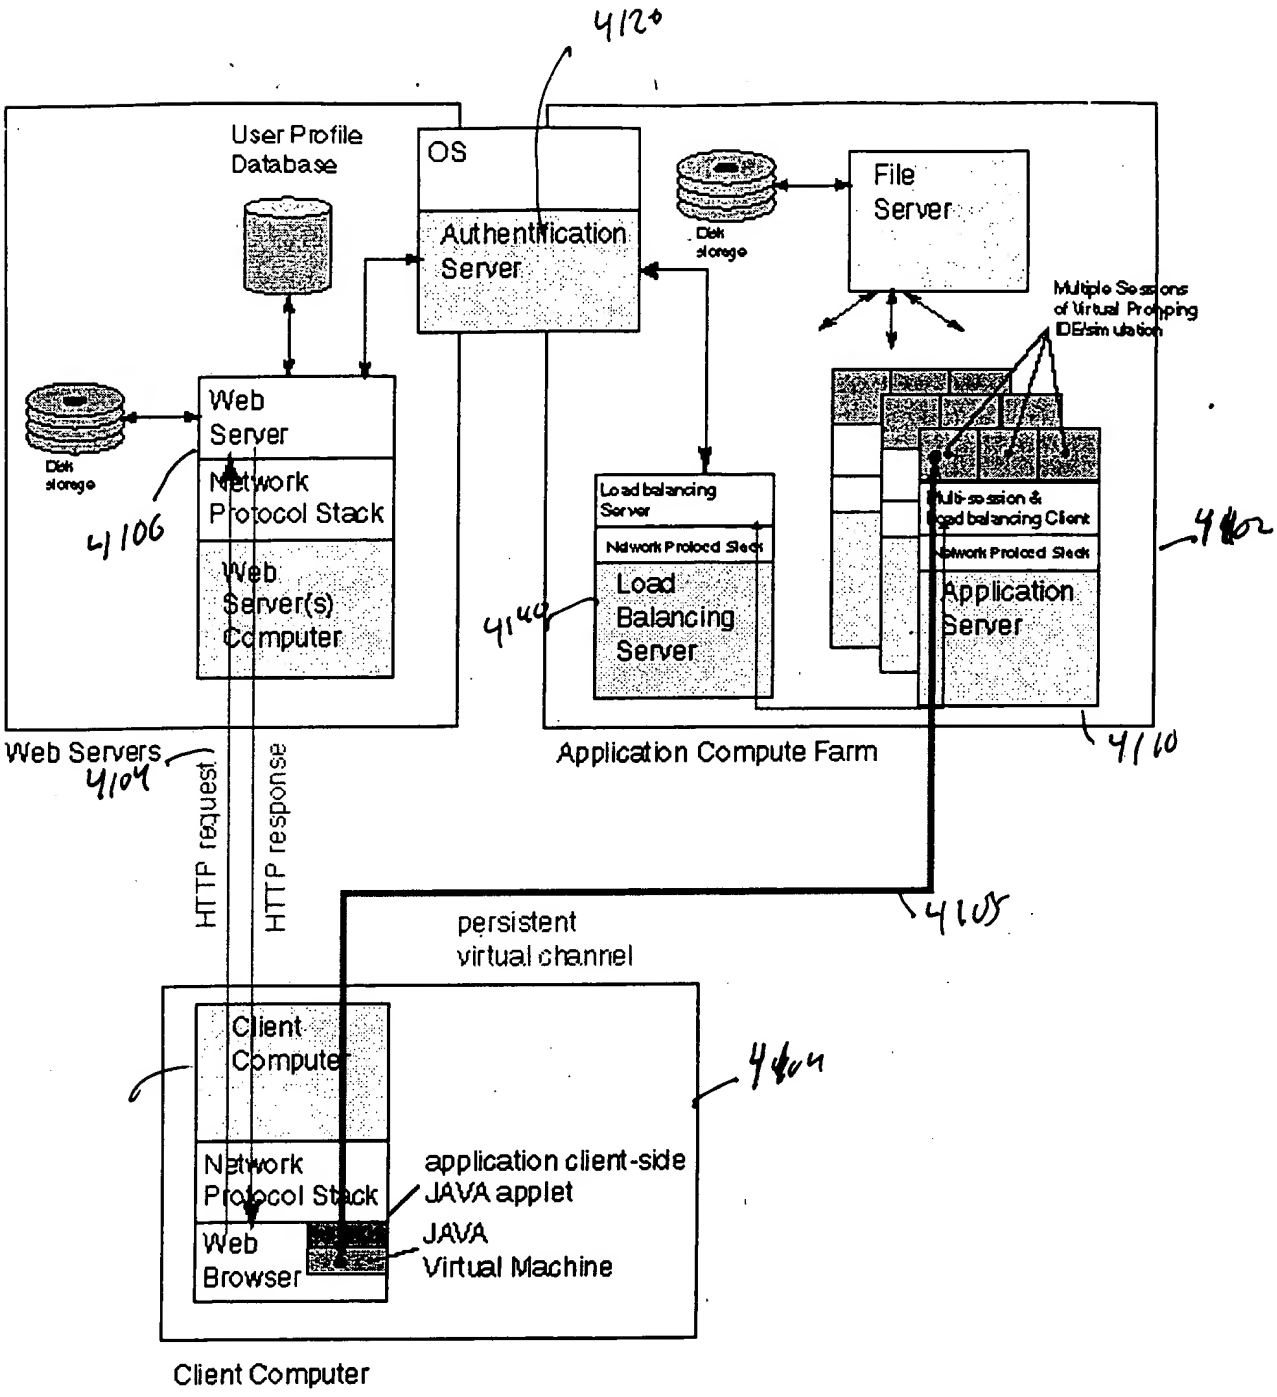
4120
User Profile Database
OS
Authentification Server
Disk storage
File Server
Multiple Sessions of Virtual Prototyping IDE/simulation
Web Server
Network Protocol Stack
Web Server(s) Computer
Disk storage
4106
Load balancing Server
Network Protocol Stack
Load Balancing Server
4114
Multi-session & Load balancing Client
Network Protocol Stack
Application Server
4102
Web Servers
4104
Application Compute Farm
4110
HTTP request
HTTP response
persistent virtual channel
4108
Client Compute
Network Protocol Stack
Web Browser
application client-side JAVA applet
JAVA Virtual Machine
4104
Client Computer

FIG. 41

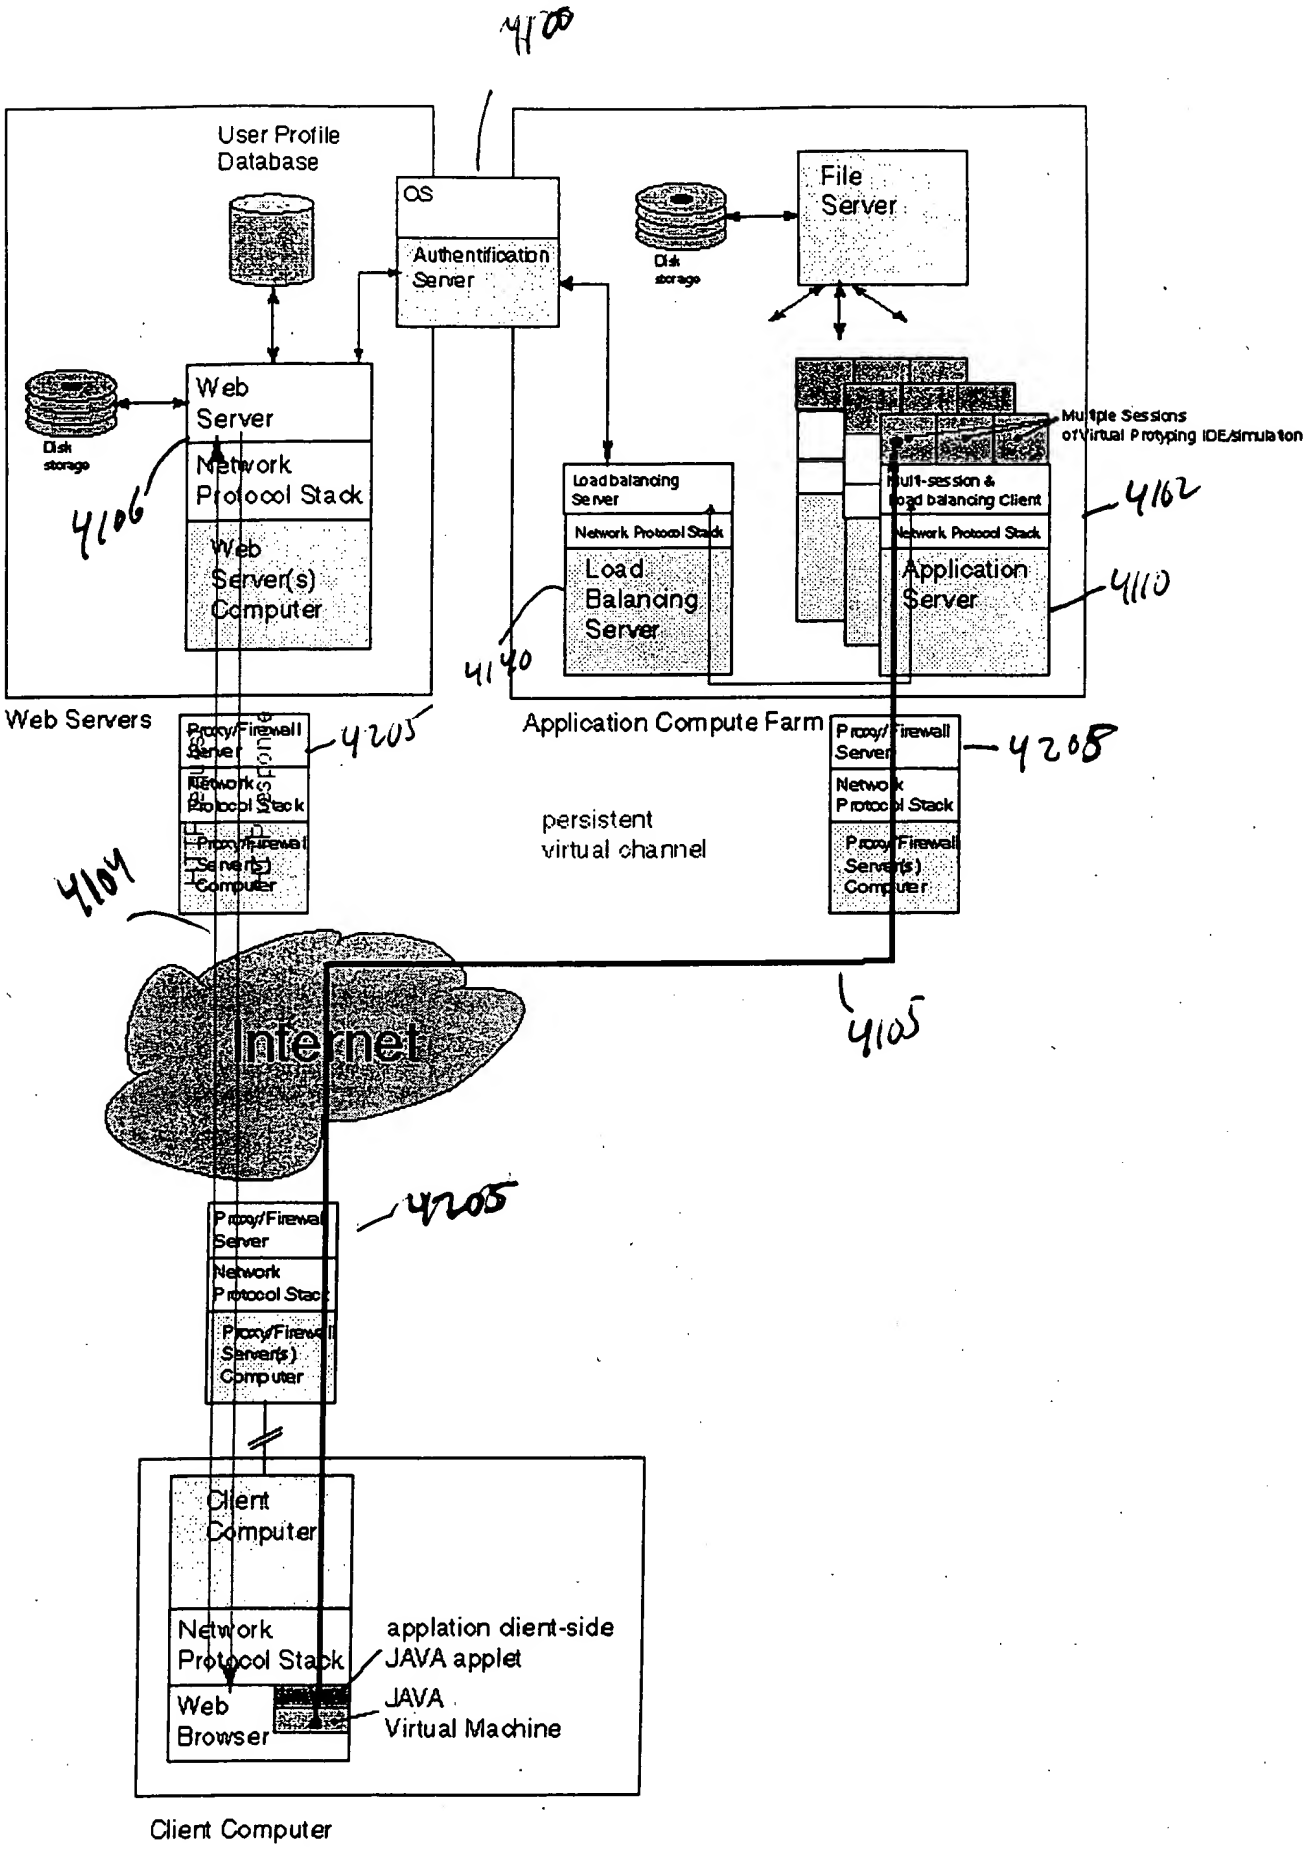
4100
User Profile Database
OS
Authentification Server
File Server
Disk storage
Disk storage
Web Server
Network Protocol Stack
Web Server(s) Computer
4106
Load balancing Server
Network Protocol Stack
Load Balancing Server
4140
Multiple Sessions of Virtual Prototyping IDE/simulation
Multi-session & load balancing Client
Network Protocol Stack
Application Server
4162
4110
Web Servers
Application Compute Farm
Proxy/Firewall Server
Network Protocol Stack
Proxy/Firewall Server(s) Computer
4205
4208
persistent virtual channel
4104
Internet
4105
Proxy/Firewall Server
Network Protocol Stack
Proxy/Firewall Server(s) Computer
4205
Client Computer
Network Protocol Stack
Web Browser
applation client-side JAVA applet
JAVA Virtual Machine
Client Computer

FIG. 42

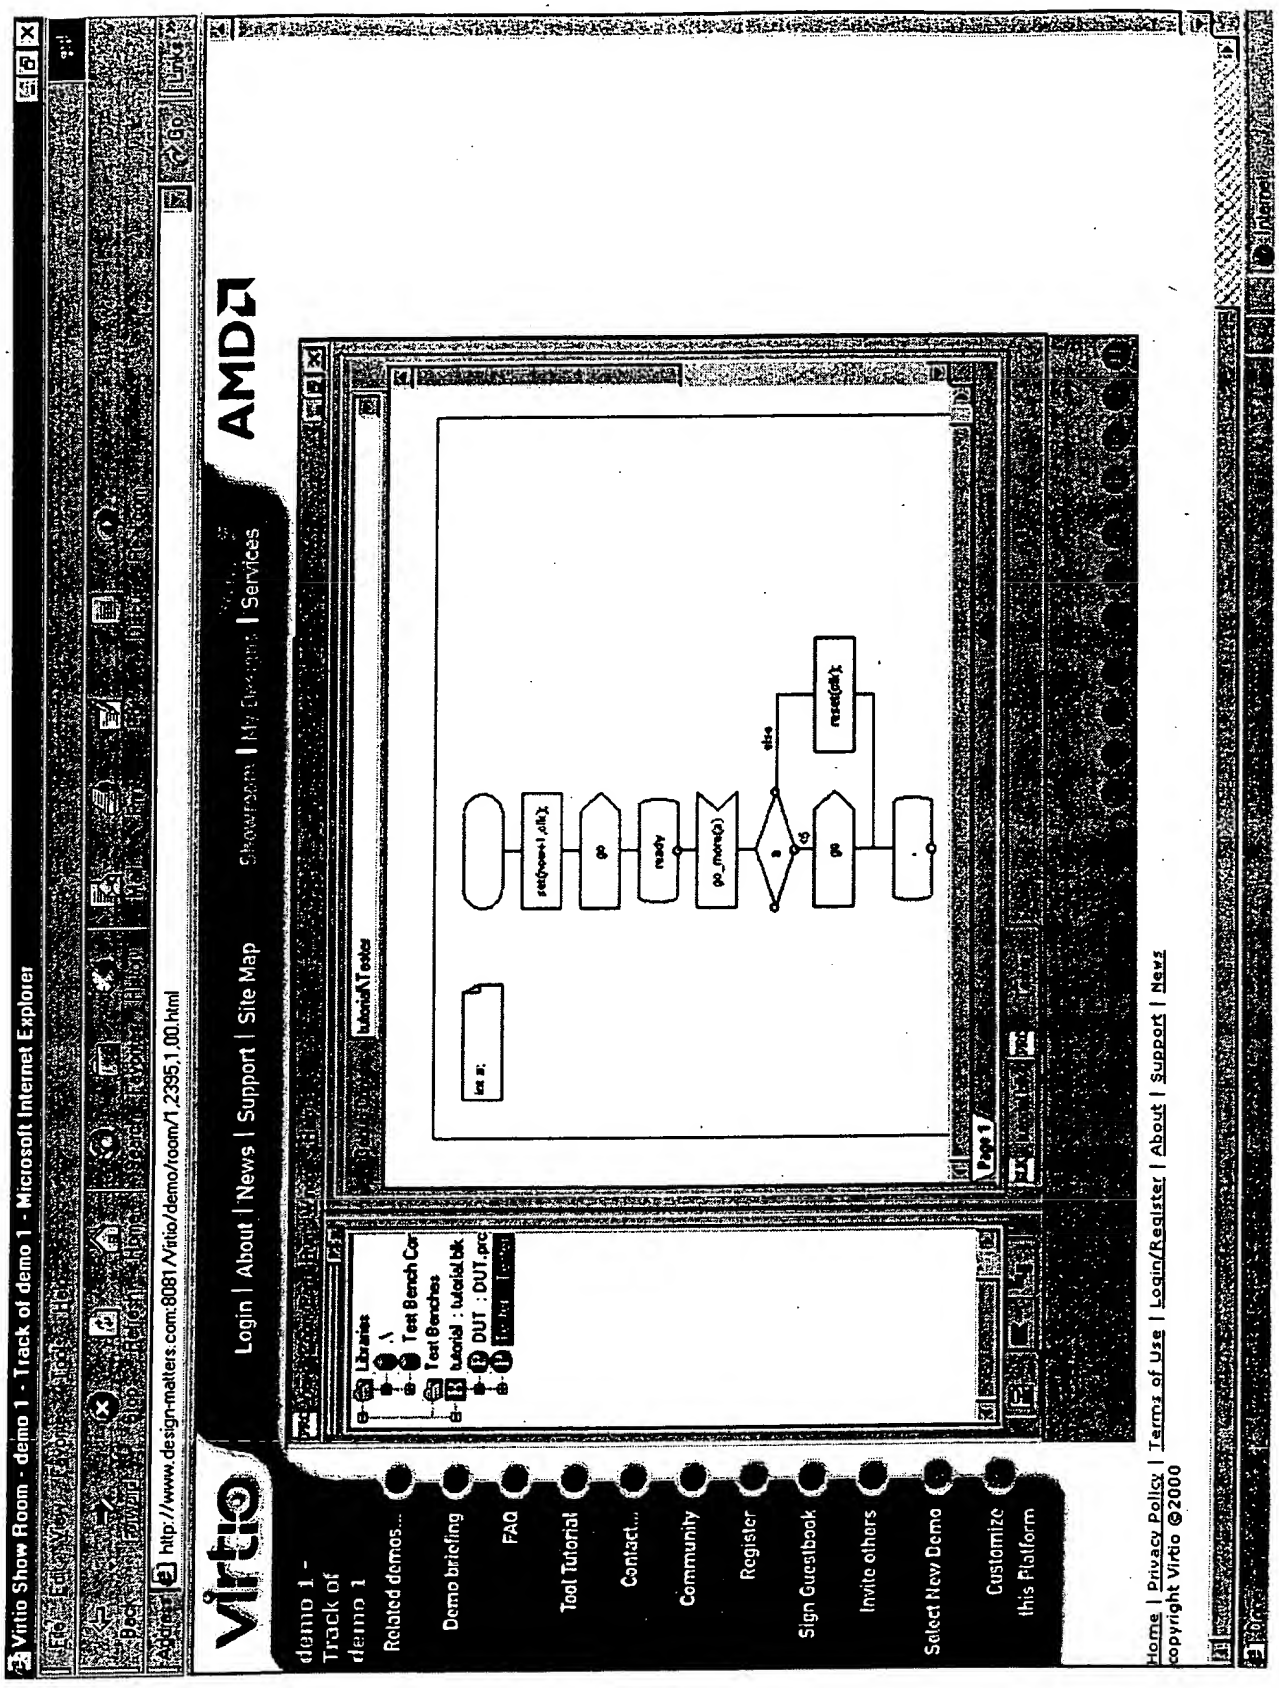
Virtio Show Room - demo 1 - Track of demo 1 - Microsoft Internet Explorer
http://www.design-matters.com:8081/Virtio/demo/room/1,2395,1,00.html
Virtio
Login | About | News | Support | Site Map
Showroom | My Rooms | Services
AMD
demo 1 - Track of demo 1
Related demos...
Demo briefing
FAQ
Tool Tutorial
Contact...
Community
Register
Sign Guestbook
Invite others
Select New Demo
Customize this Platform
Libraries
Test Benches
tutorial : tutorial.tst
DUT : DUT.prc
Home | Privacy Policy | Terms of Use | Login/Register | About | Support | News
copyright Virtio ©2000

FIG. 43

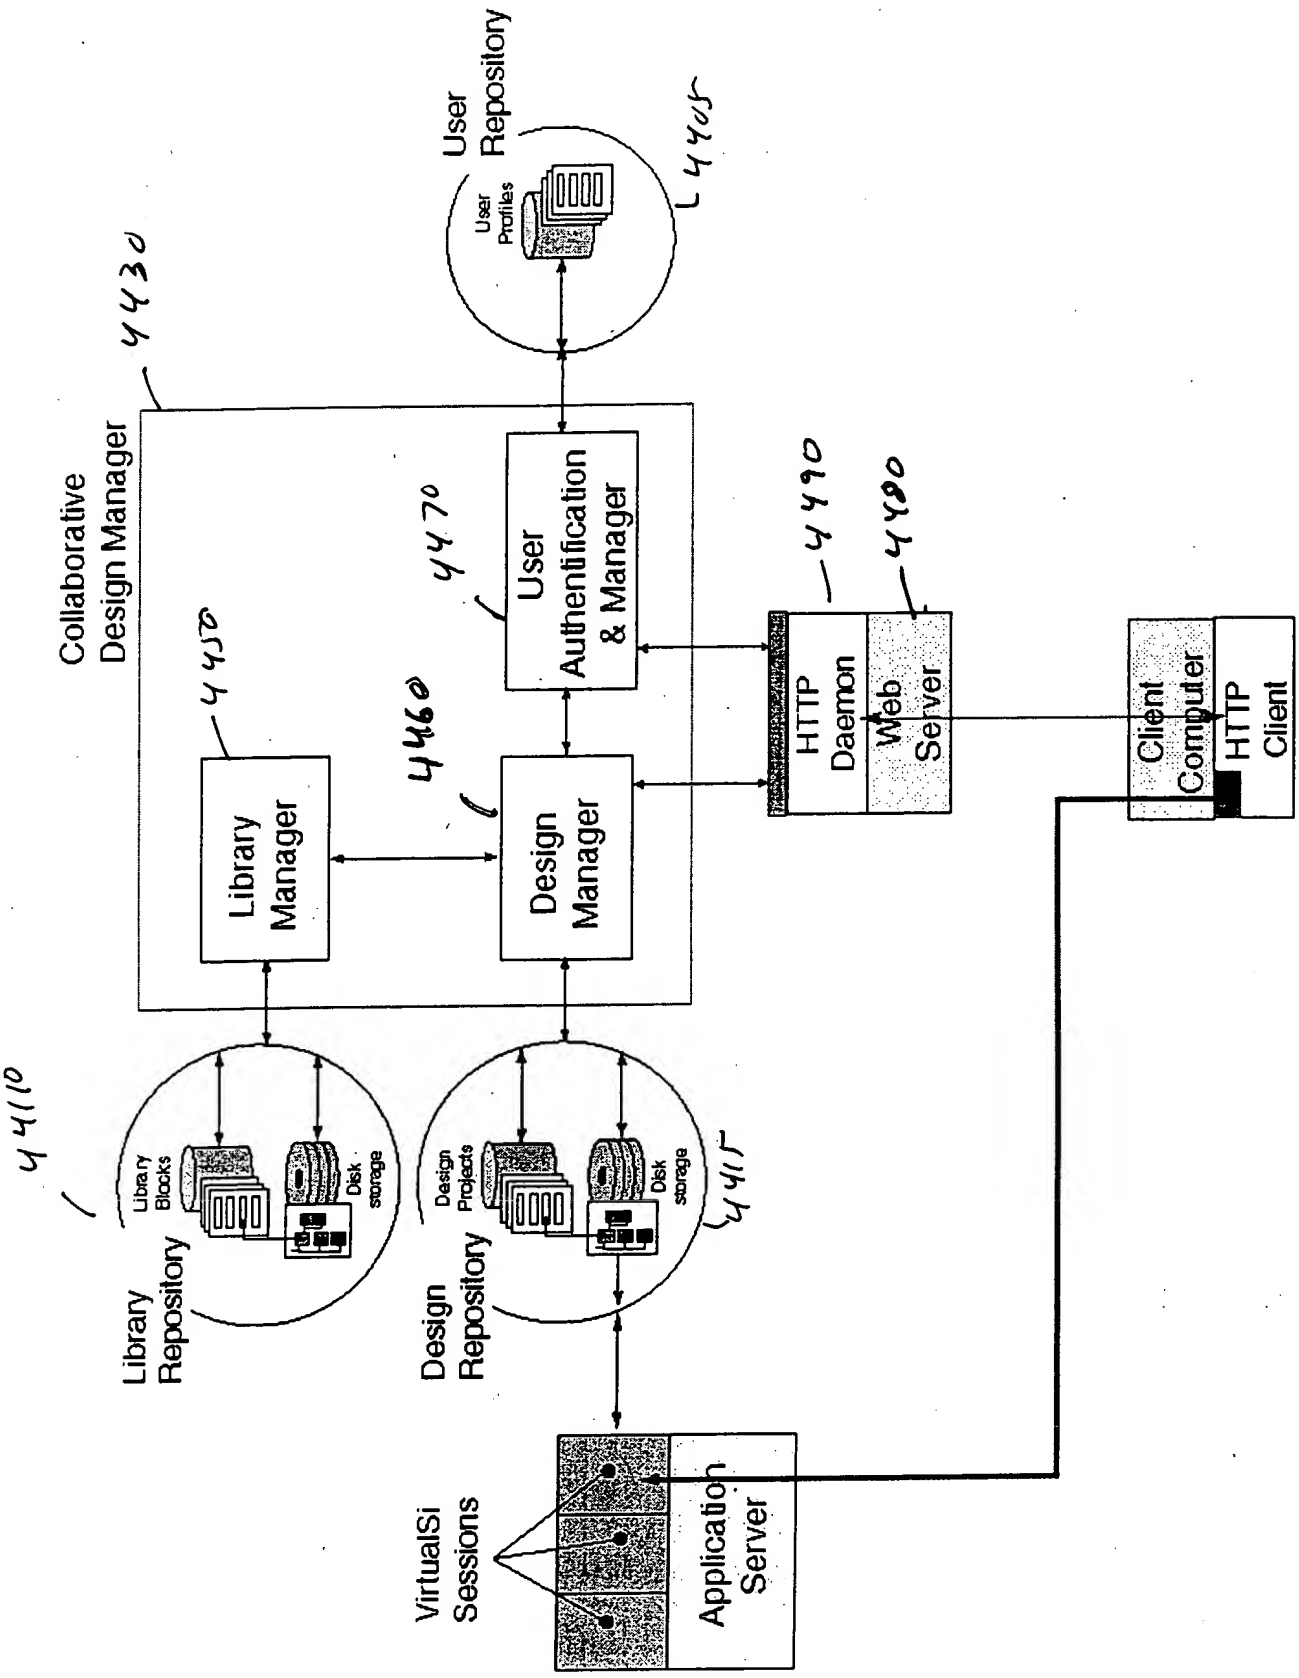
User Repository
User Profiles
4405
4430
Collaborative Design Manager
User Authentification & Manager
4470
4490
4490
HTTP Daemon
Web Server
Client Computer
HTTP Client
4420
Library Manager
4460
Design Manager
4410
Library Blocks
Disk storage
Library Repository
Design Projects
Disk storage
Design Repository
4415
VirtualSi Sessions
Application Server

FIG. 44

Clock_1	Scope name.
clk(int)	Signal name and declaration.

t	Timer or clock name and declaration.
clk	Local name of a signal coming from the upper scope (inherited).
myClk	Timer or clock is being set.
	Signal is being sent.
	Signal is being received.
	Signal is being saved.

FIG. 45

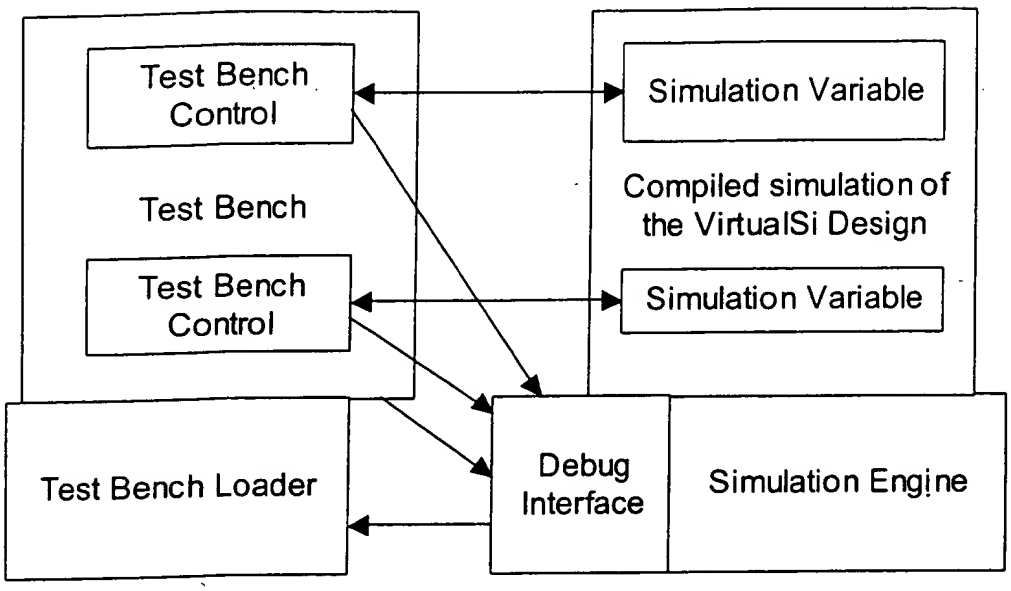
Test Bench Control
Test Bench
Test Bench Control
Test Bench Loader
Simulation Variable
Compiled simulation of the VirtualSi Design
Simulation Variable
Debug Interface
Simulation Engine

FIG. 46

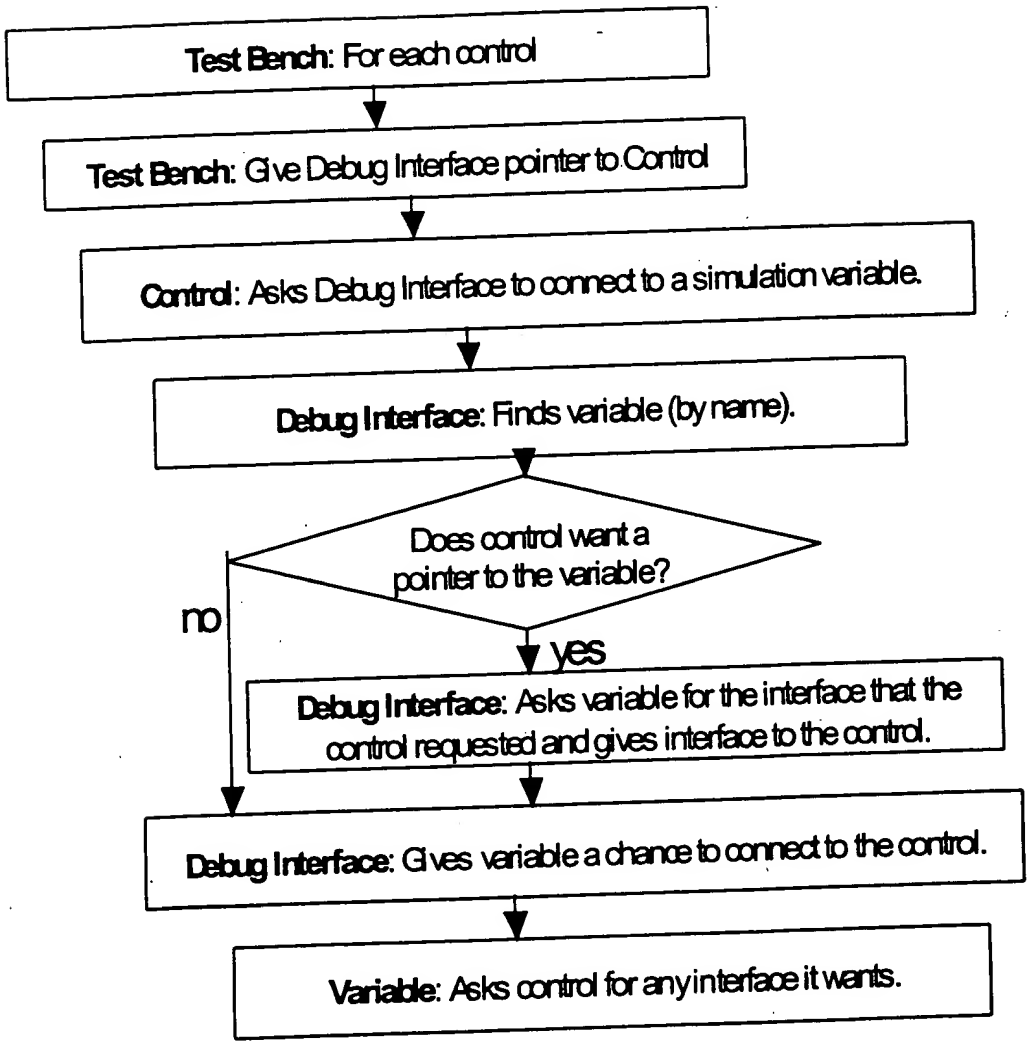
Test Bench: For each control
Test Bench: Give Debug Interface pointer to Control
Control: Asks Debug Interface to connect to a simulation variable.
Debug Interface: Finds variable (by name).
Does control want a pointer to the variable?
no
yes
Debug Interface: Asks variable for the interface that the control requested and gives interface to the control.
Debug Interface: Gives variable a chance to connect to the control.
Variable: Asks control for any interface it wants.

FIG. 47

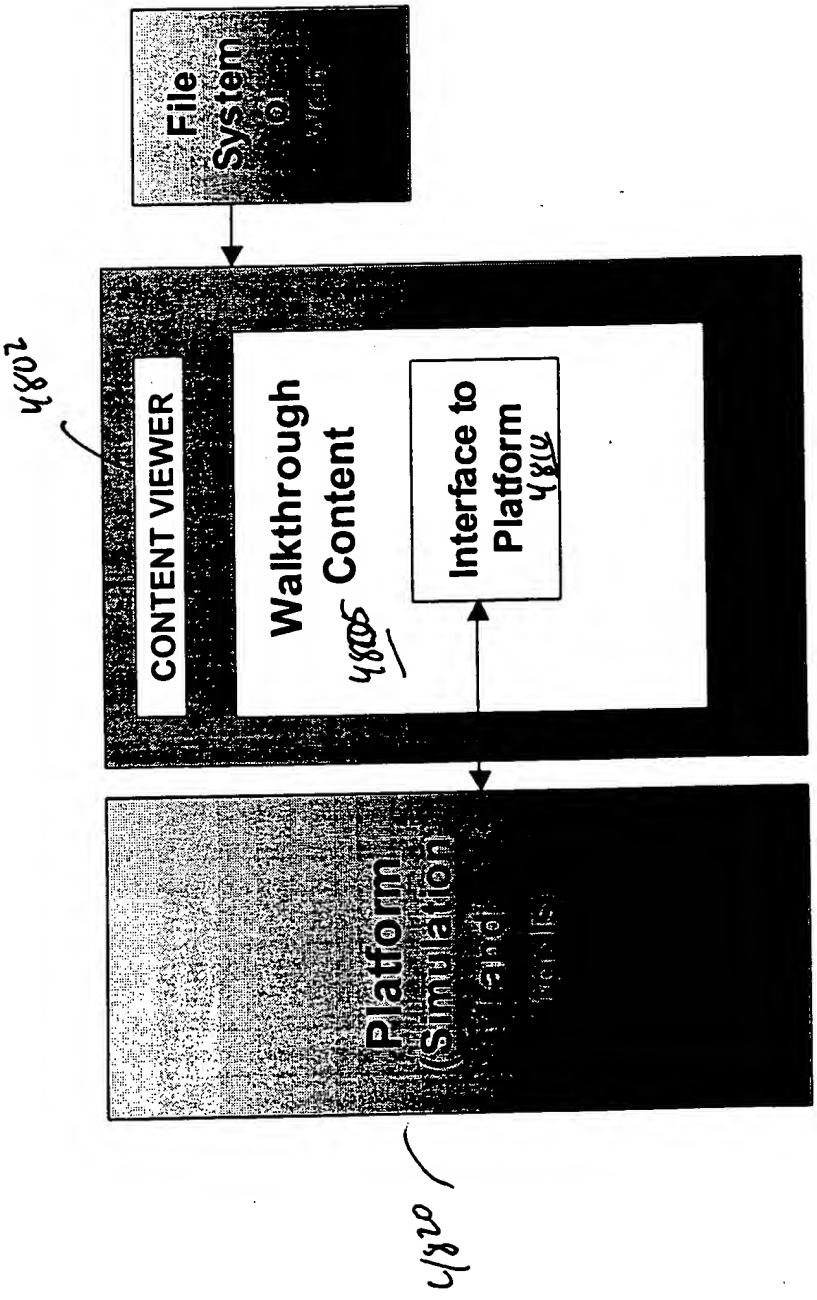
File System
CONTENT VIEWER
Walkthrough Content
Interface to Platform
Platform (Simulation)

Fig. 48

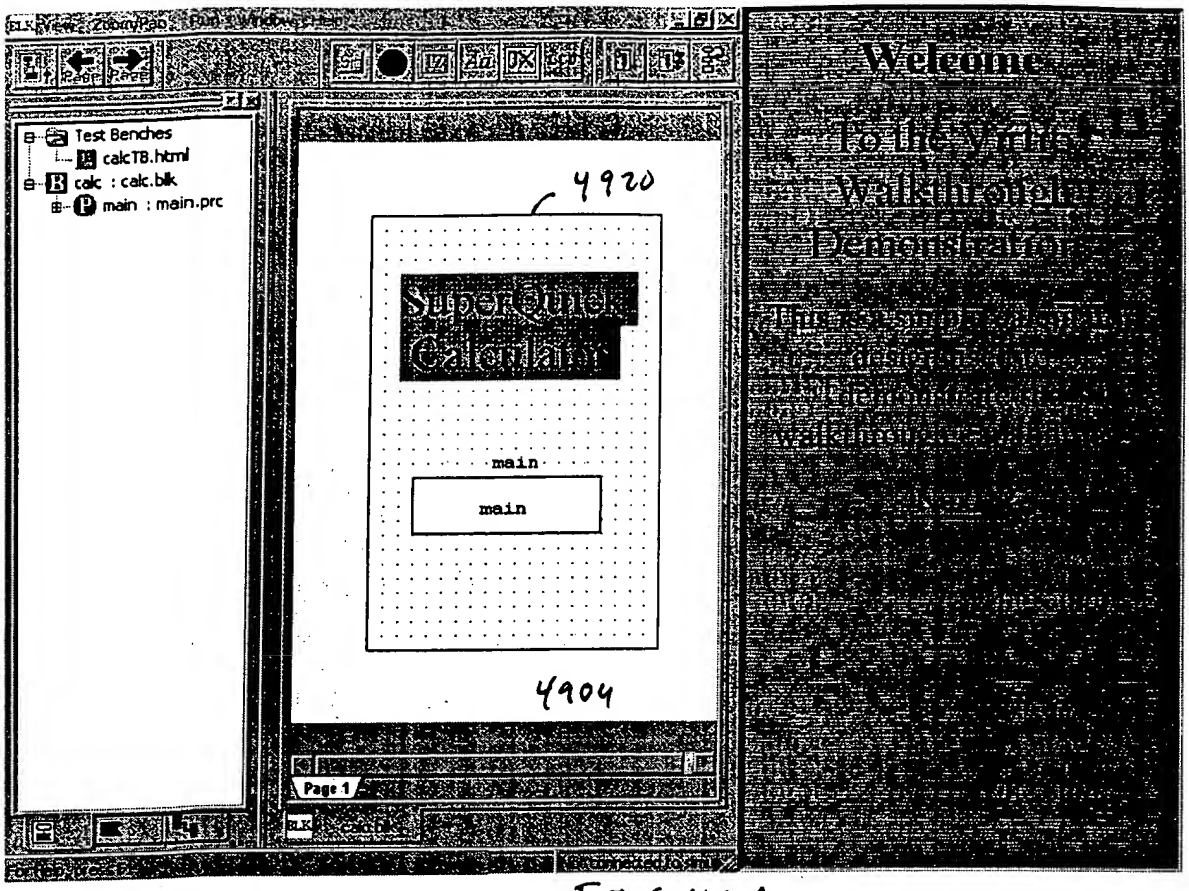
Test Benches
calcTB.html
calc : calc.blk
main : main.prc
4920
Super Quick Calculator
main
main
4904
Page 1
Welcome
To the Virtu
Walkthrough
Demonstrator

FIG. 49A

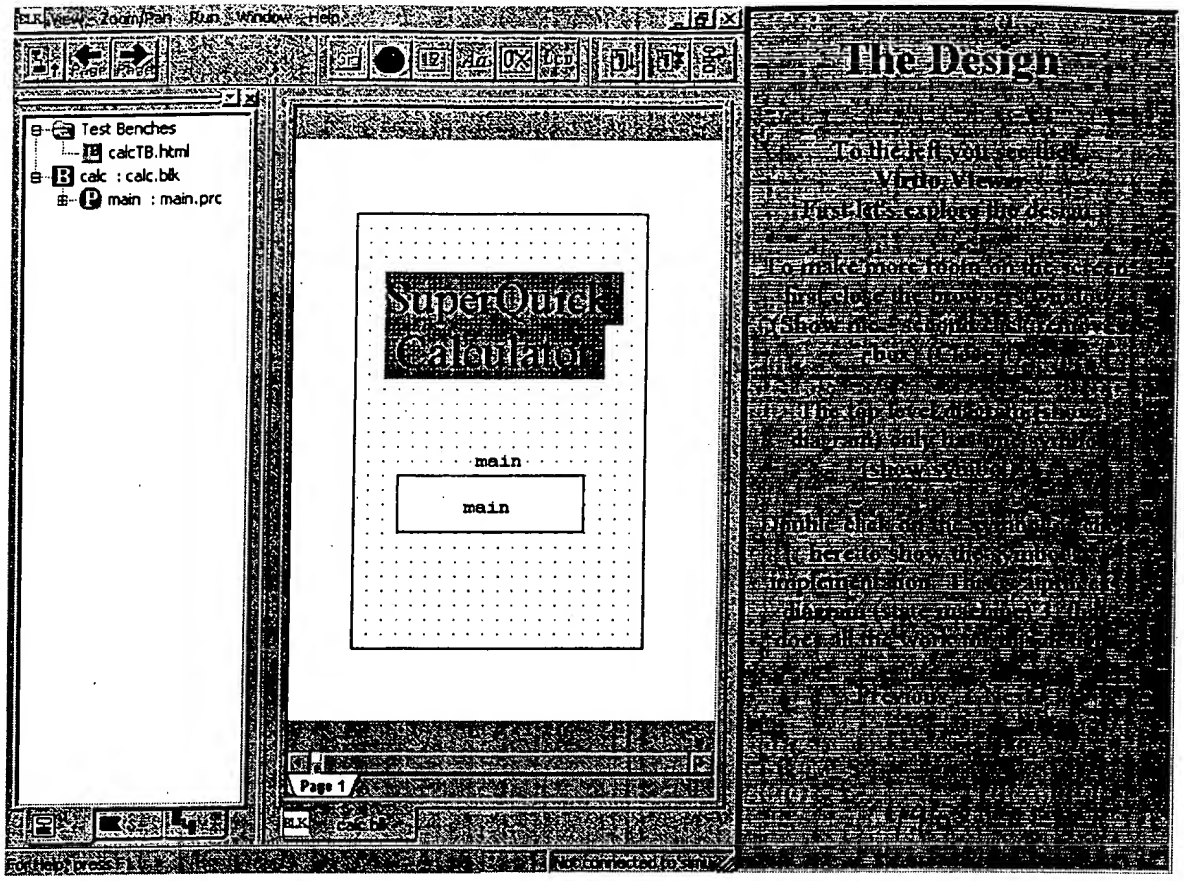
Test Benches
calcTB.html
calc : calc.blk
main : main.prc
SuperQuick Calculator
main
main
Page 1
The Design

FIG. 49B

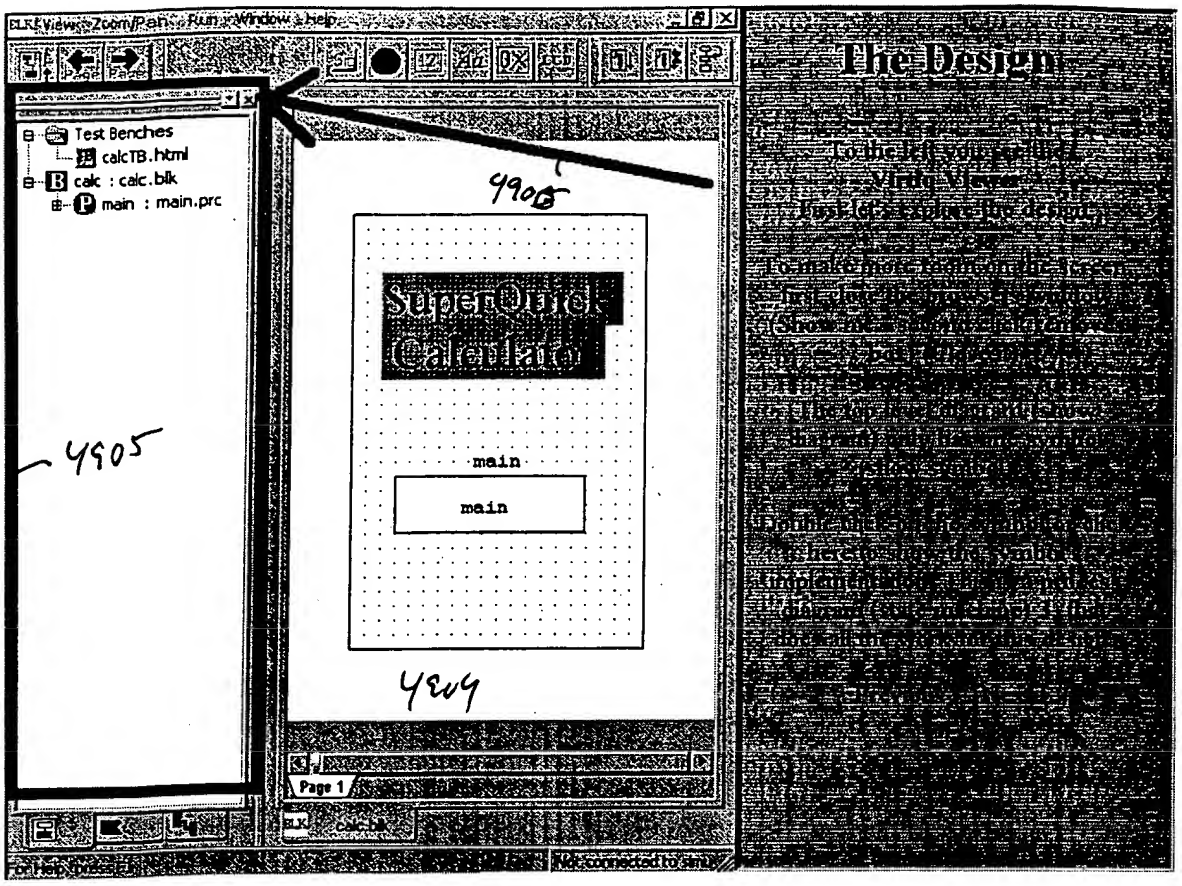
Test Benches
calcTB.html
calc : calc.blk
main : main.prc
4905
4906
4907
SuperQuick Calculator
main
main
Page 1
The Design

FIG. 49C

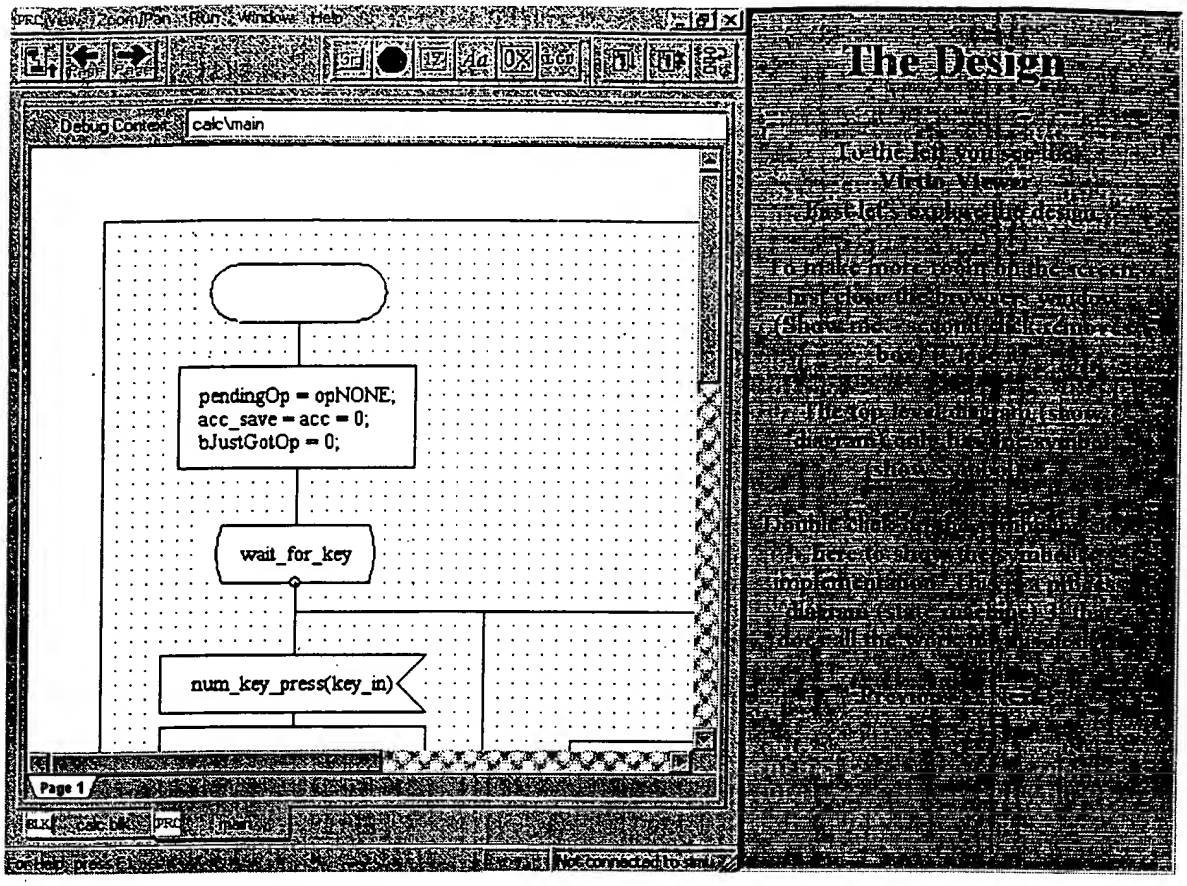
Debug Context
calc\main
pendingOp = opNONE;
acc_save = acc = 0;
bJustGotOp = 0;
wait_for_key
num_key_press(key_in)
Page 1
The Design

FIG. 49 D

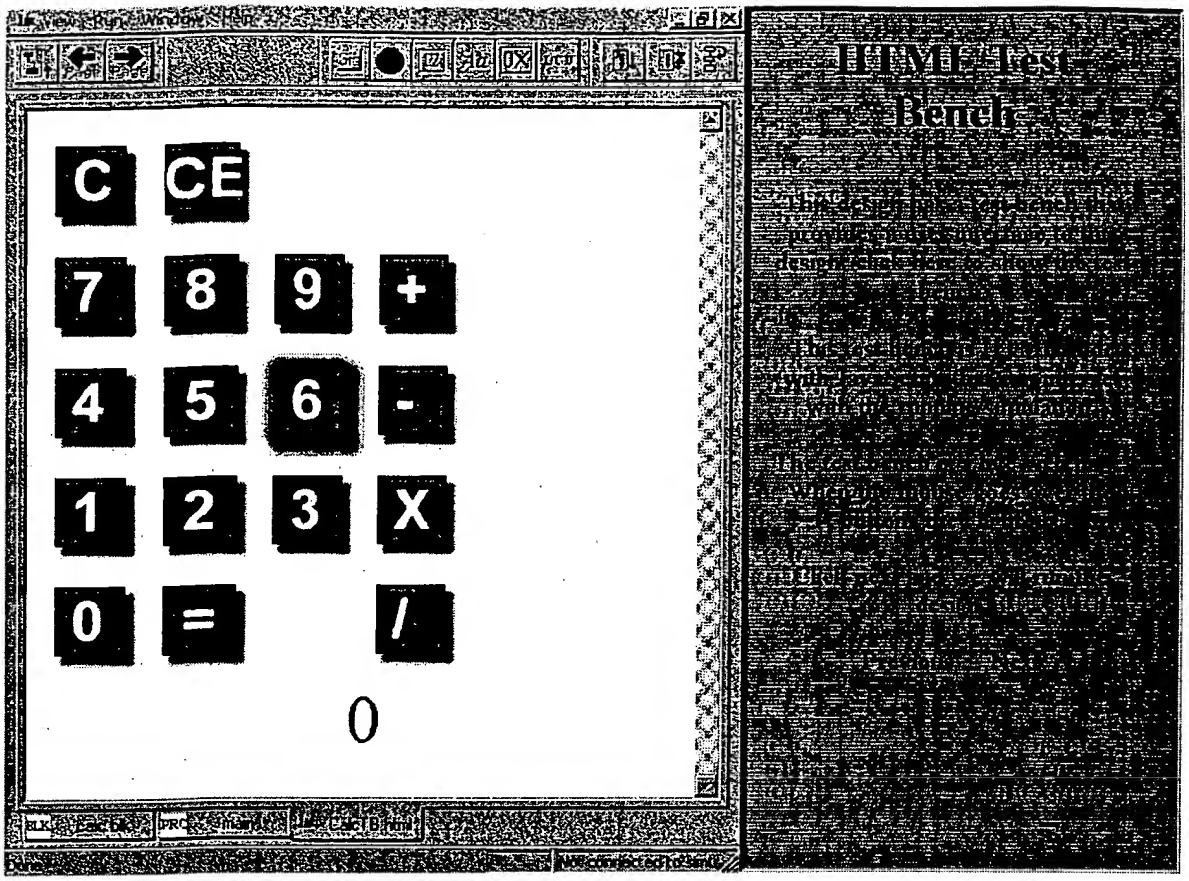

FIG. 49E

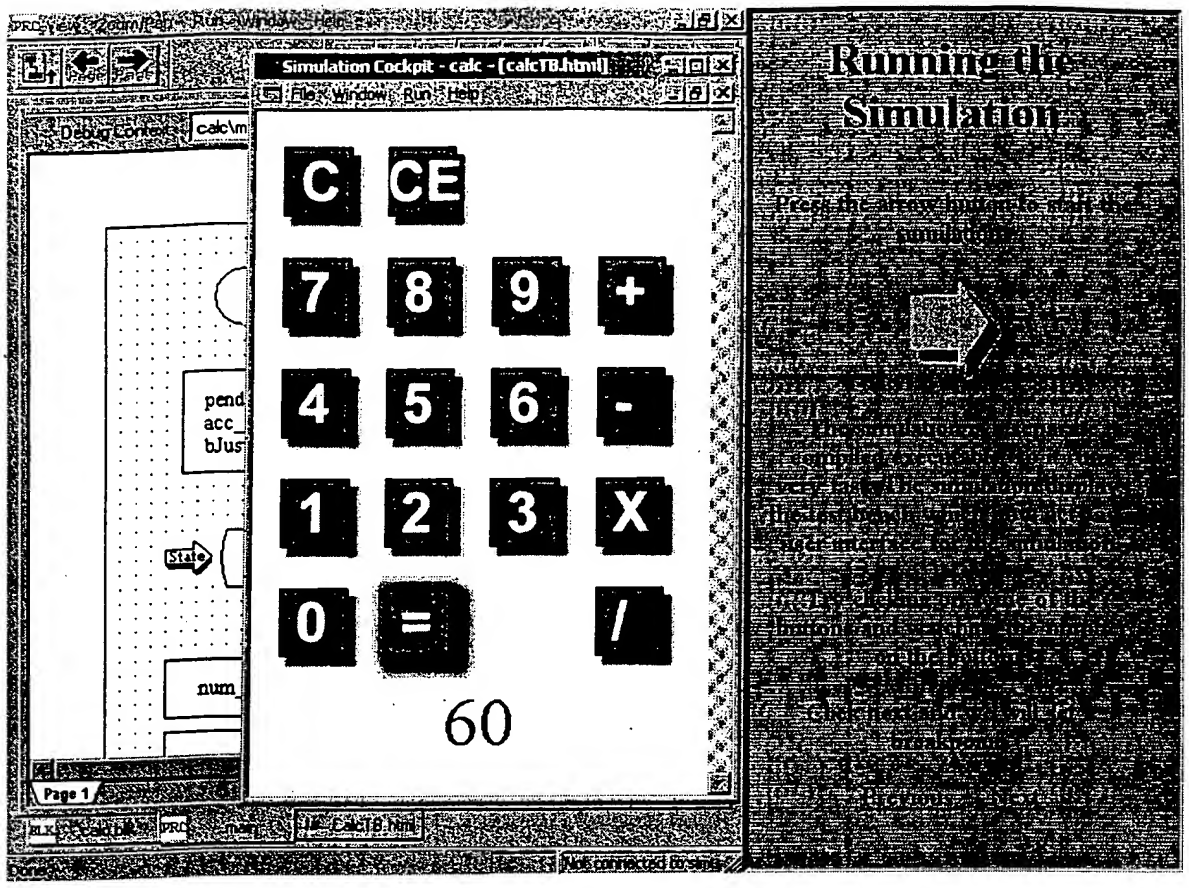
Simulation Cockpit - calc - [calcTB.html]
File Window Run Help
C
CE
7
8
9
+
4
5
6
-
1
2
3
X
0
=
/
60
Page 1
Running the Simulation

FIG. 49F

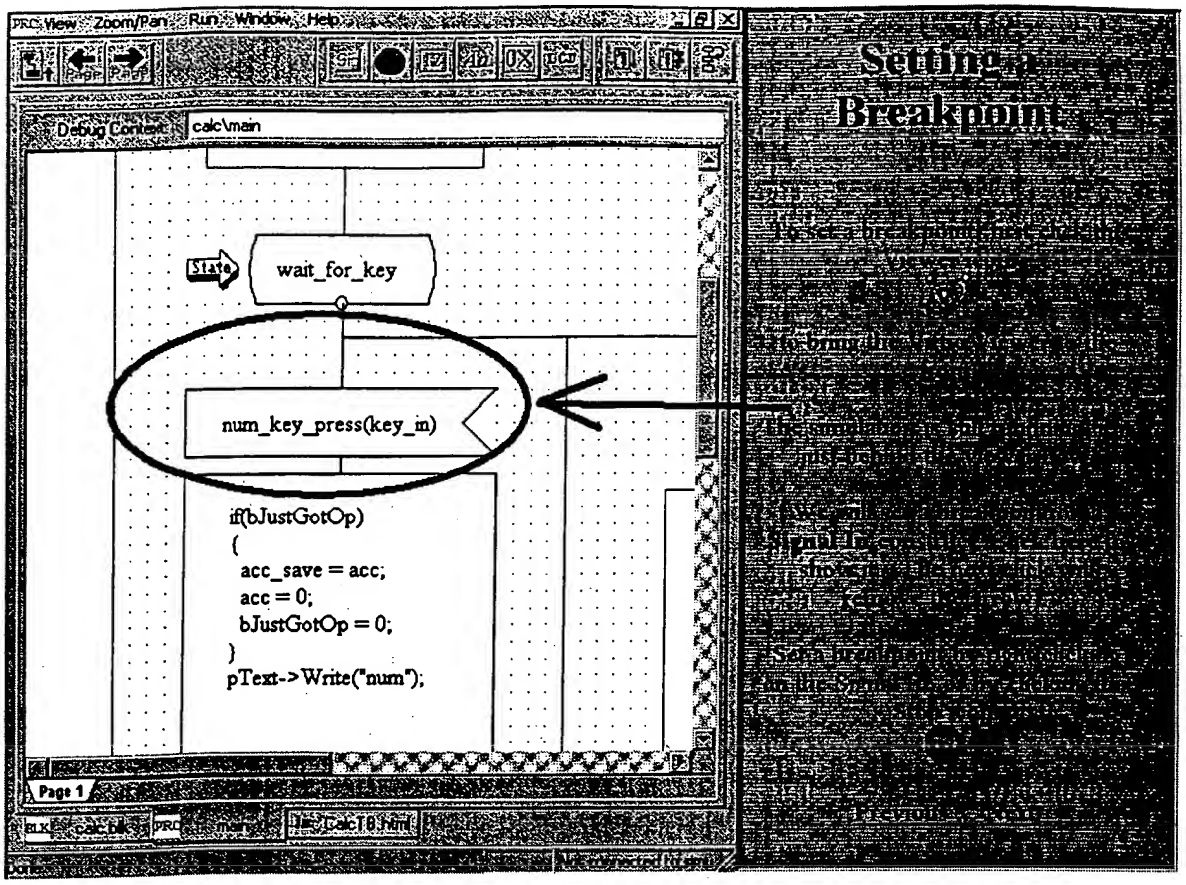
Setting a Breakpoint
Debug Context
calc\main
State
wait_for_key
num_key_press(key_in)
if(bJustGotOp)
{
acc_save = acc;
acc = 0;
bJustGotOp = 0;
}
pText->Write("num");
Page 1

FIG. 49G

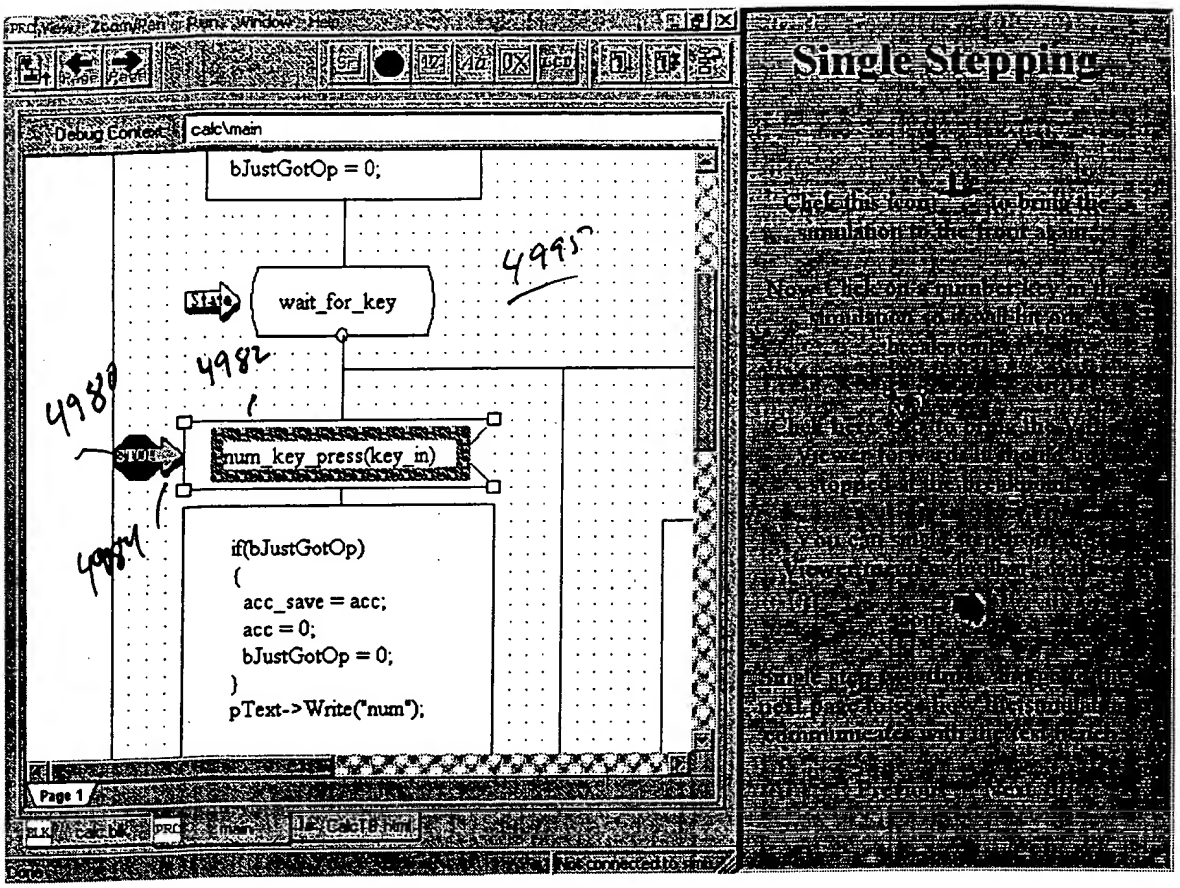
Single Stepping
Debug Context
calc\main
bJustGotOp = 0;
wait_for_key
num_key_press(key_in)
if(bJustGotOp)
{
acc_save = acc;
acc = 0;
bJustGotOp = 0;
}
pText->Write("num");
Page 1

FIG. 49H

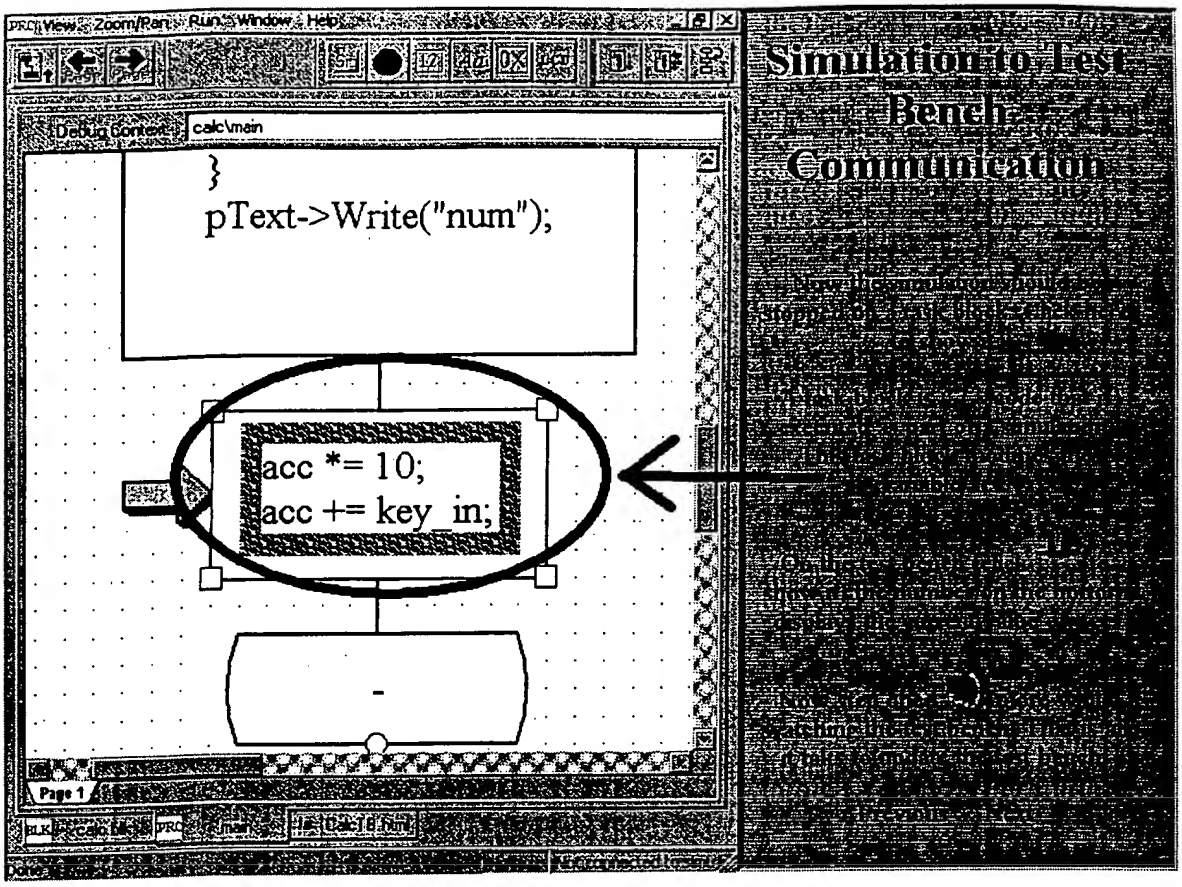
Simulation to Test Bench Communication
Debug Context
calc\main
}
pText->Write("num");
acc *= 10;
acc += key_in;
-
Page 1

FIG. 49I

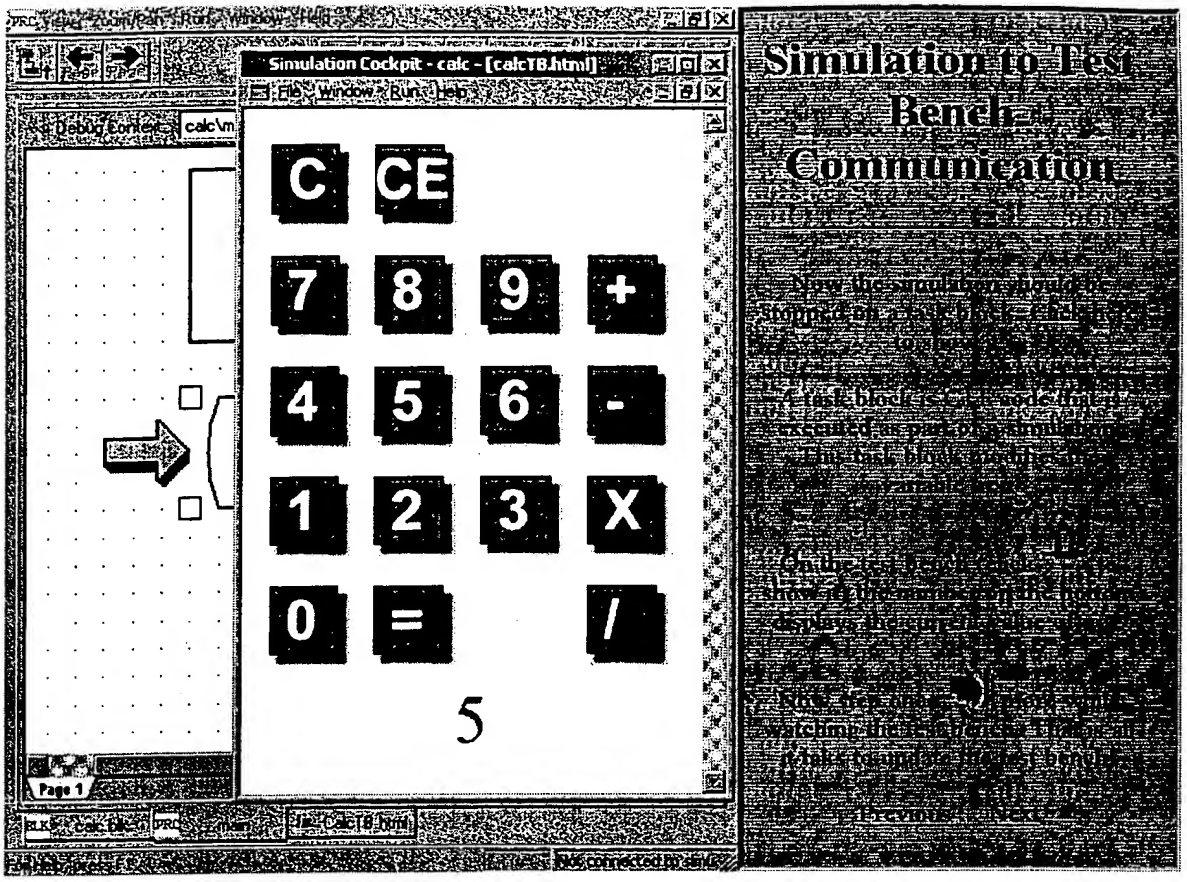
Simulation Cockpit - calc - [calcTB.html]
C
CE
7
8
9
+
4
5
6
-
1
2
3
X
0
=
/
5
Simulation to Test Bench Communication

FIG. 49J

Integrator Lab Screen Snap Shots – On-Line Enablement

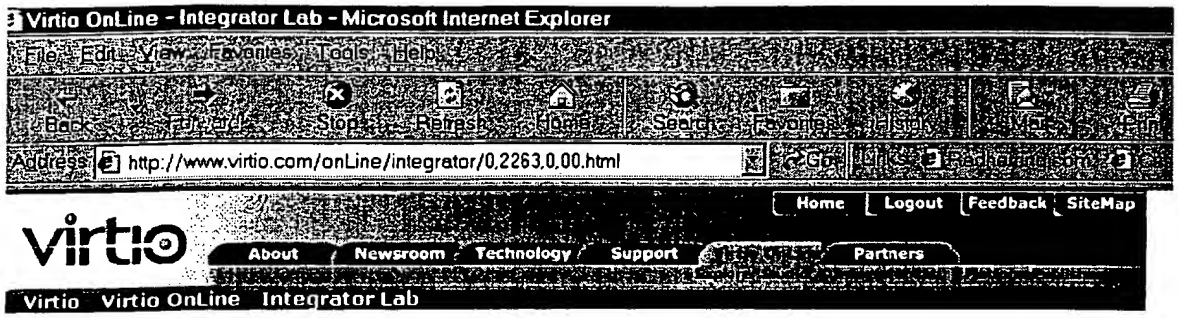

Integrator Lab

Current Designs

Design Name	Creation Date	Last Edit Date	Description	Delete Project
test	02-May-01	29-May-01	test	Delete
pcnetlink	04-May-01	25-May-01	asdasd	Delete
clonetutorial	23-May-01	23-May-01	testing cloning of build77	Delete
clonehanoi	25-Apr-01	31-May-01	cloning hanoi	Delete
cloneatlas	25-Apr-01	29-May-01	cloning atals	Delete

New Design

My Invitees

FIG. 50

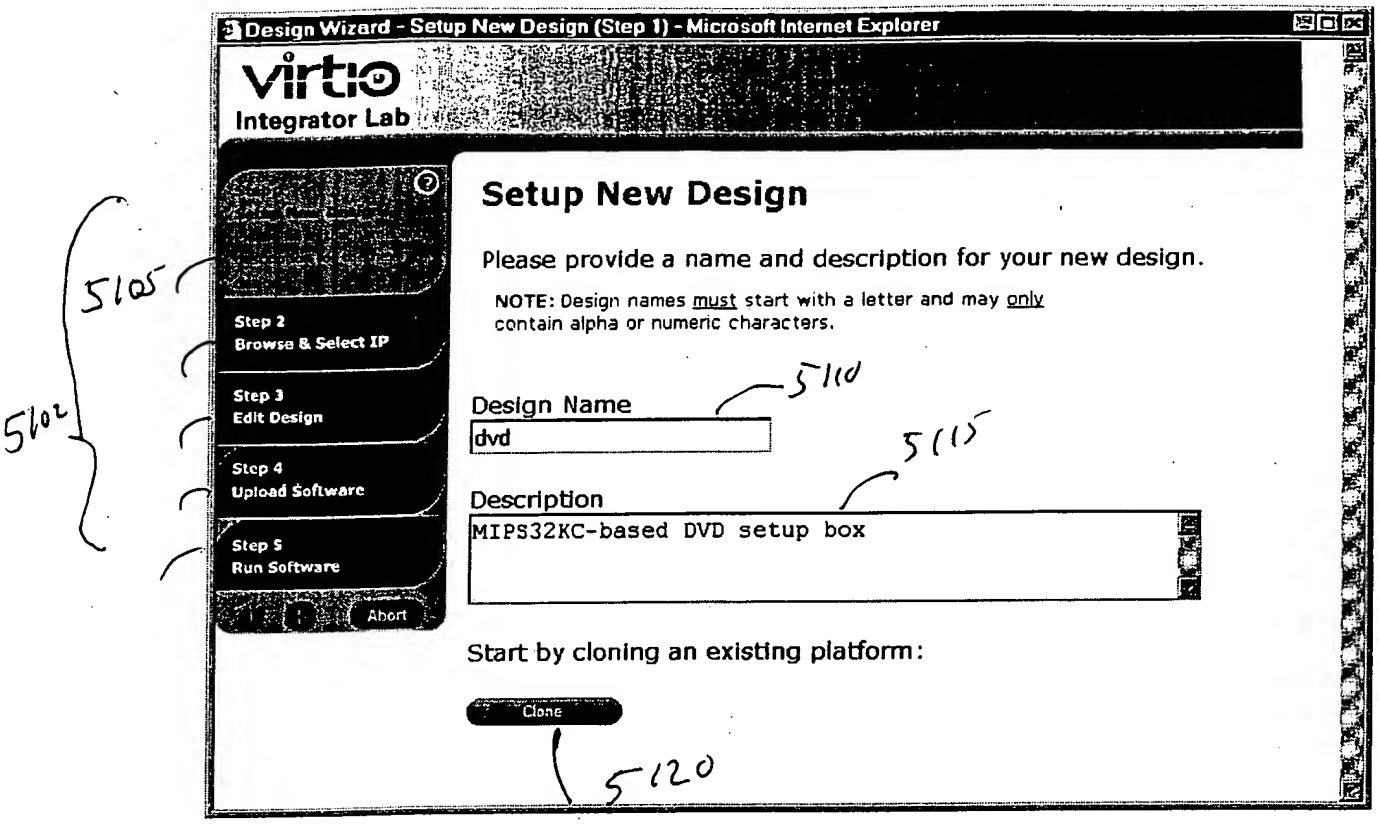
Design Wizard - Setup New Design (Step 1) - Microsoft Internet Explorer
virtio
Integrator Lab
Step 2
Browse & Select IP
Step 3
Edit Design
Step 4
Upload Software
Step 5
Run Software
Abort
Setup New Design
Please provide a name and description for your new design.
NOTE: Design names must start with a letter and may only contain alpha or numeric characters.
Design Name
dvd
Description
MIPS32KC-based DVD setup box
Start by cloning an existing platform:
Clone
5105
5102
5110
5115
5120

FIG. 51

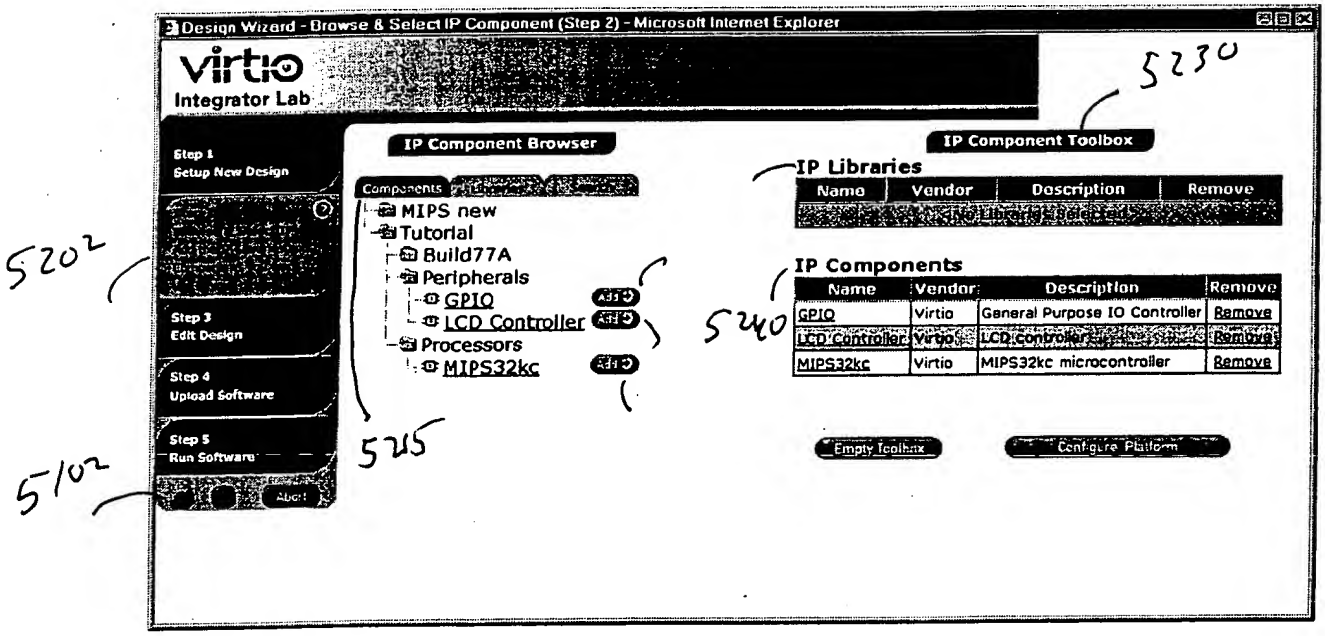
Design Wizard - Browse & Select IP Component (Step 2) - Microsoft Internet Explorer
virtio
Integrator Lab
Step 1
Setup New Design
Step 3
Edit Design
Step 4
Upload Software
Step 5
Run Software
Abort
IP Component Browser
IP Component Toolbox
Components
MIPS new
Tutorial
Build77A
Peripherals
GPIO
LCD Controller
Processors
MIPS32kc
IP Libraries
Name
Vendor
Description
Remove
IP Components
Name
Vendor
Description
Remove
GPIO
Virtio
General Purpose IO Controller
Remove
LCD Controller
Virtio
Remove
MIPS32kc
Virtio
MIPS32kc microcontroller
Remove
Empty Toolbox
Configure Platform
5202
5102
5205
5230
5240

FIG. 52

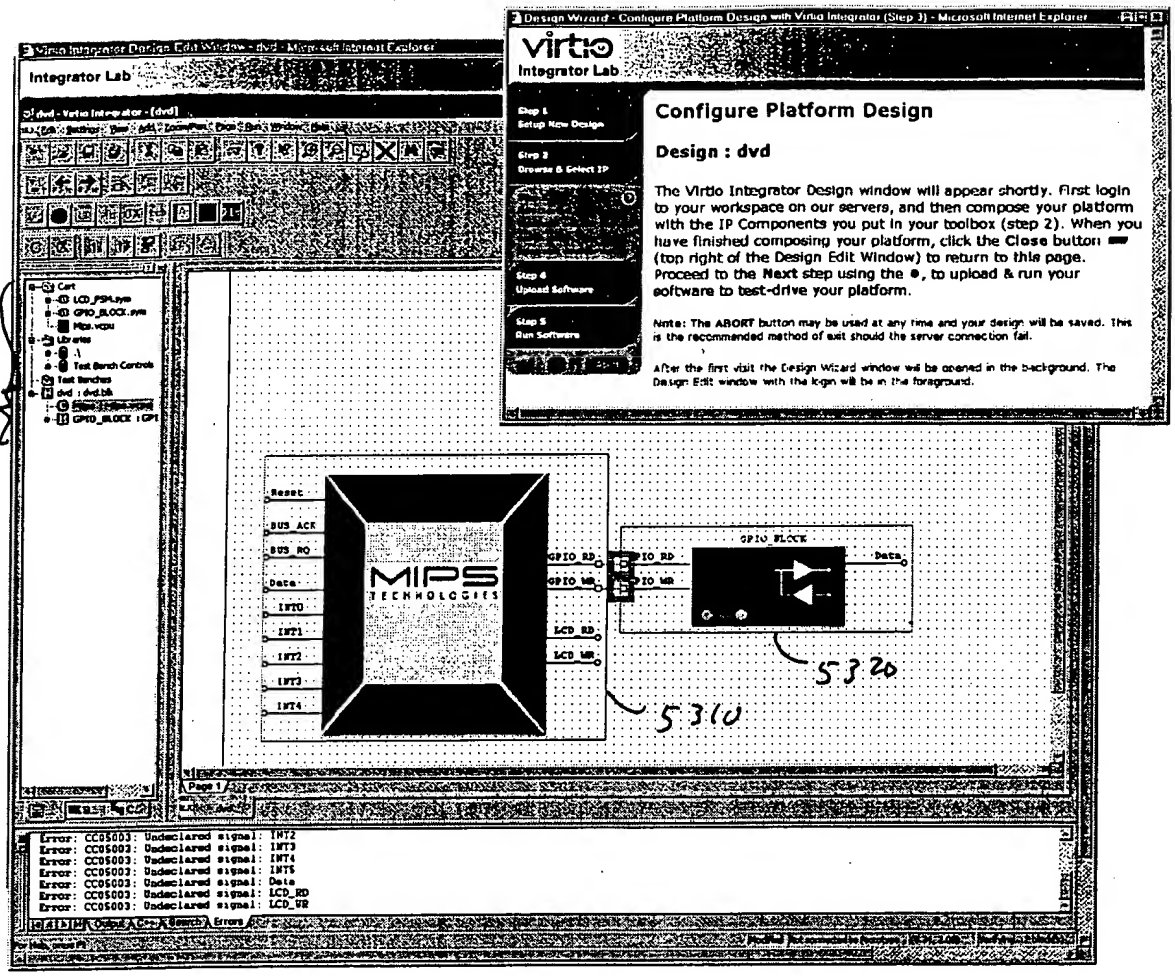
Design Wizard - Configure Platform Design with Virtio Integrator (Step 3) - Microsoft Internet Explorer
virtio
Integrator Lab
Configure Platform Design
Design : dvd
The Virtio Integrator Design window will appear shortly. First login to your workspace on our servers, and then compose your platform with the IP Components you put in your toolbox (step 2). When you have finished composing your platform, click the Close button (top right of the Design Edit Window) to return to this page. Proceed to the Next step using the , to upload & run your software to test-drive your platform.
Note: The ABORT button may be used at any time and your design will be saved. This is the recommended method of exit should the server connection fail.
After the first visit the Design Wizard window will be opened in the background. The Design Edit window with the login will be in the foreground.
Integrator Lab
MIPS
TECHNOLOGIES
Reset
BUS_ACK
BUS_RQ
Data
INT0
INT1
INT2
INT3
INT4
GPIO_RD
GPIO_WR
LCD_RD
LCD_WR
GPIO_BLOCK
Data
5305
5320
5310

FIG. 53

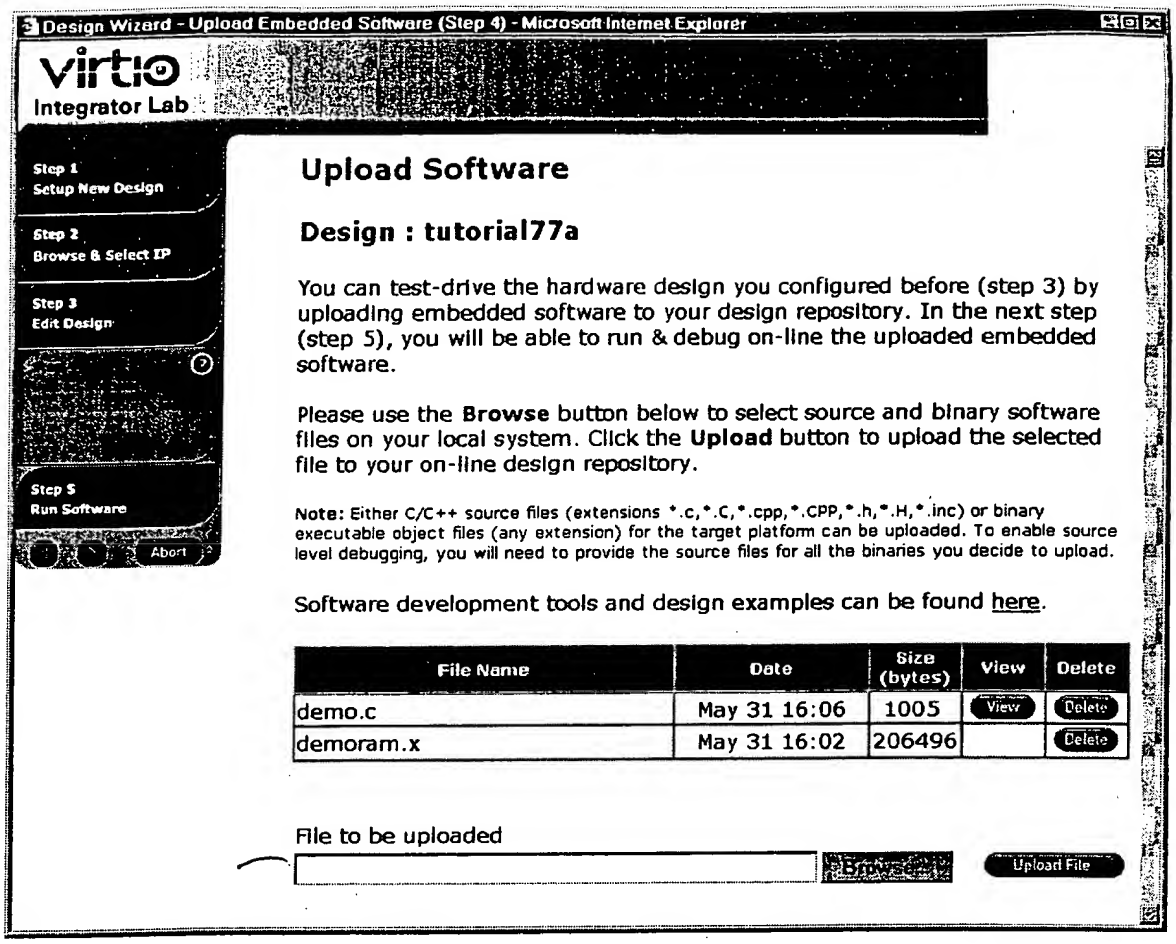
Design Wizard - Upload Embedded Software (Step 4) - Microsoft Internet Explorer
virtio
Integrator Lab
Step 1
Setup New Design
Step 2
Browse & Select IP
Step 3
Edit Design
Step 5
Run Software
Abort
Upload Software
Design : tutorial77a
You can test-drive the hardware design you configured before (step 3) by uploading embedded software to your design repository. In the next step (step 5), you will be able to run & debug on-line the uploaded embedded software.
Please use the Browse button below to select source and binary software files on your local system. Click the Upload button to upload the selected file to your on-line design repository.
Note: Either C/C++ source files (extensions *.c,*.C,*.cpp,*.CPP,*.h,*.H,*.inc) or binary executable object files (any extension) for the target platform can be uploaded. To enable source level debugging, you will need to provide the source files for all the binaries you decide to upload.
Software development tools and design examples can be found here.
File Name
Date
Size (bytes)
View
Delete
demo.c
May 31 16:06
1005
View
Delete
demoram.x
May 31 16:02
206496
Delete
File to be uploaded
Browse...
Upload File

5405

FIG. 54

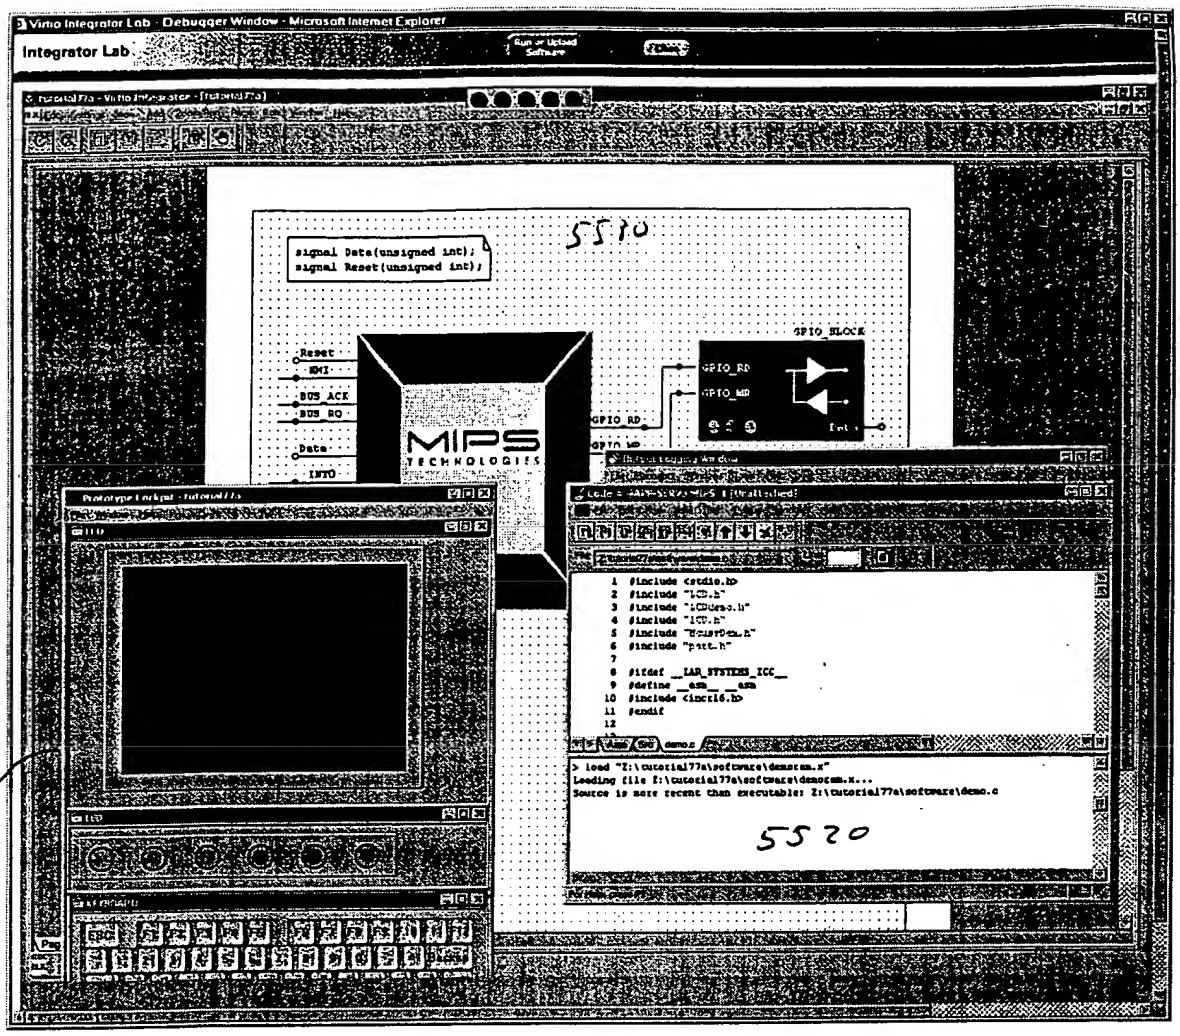
Virtio Integrator Lab - Debugger Window - Microsoft Internet Explorer
Integrator Lab
5570
signal Data(unsigned int);
signal Reset(unsigned int);
Reset
HMI
BUS_ACK
BUS_RQ
Data
INTO
MIPS
TECHNOLOGIES
GPIO_BLOCK
GPIO_RD
GPIO_WR
5510
5520

FIG. 55